

**⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**



## Drywall

### Trim

Top View



Side View

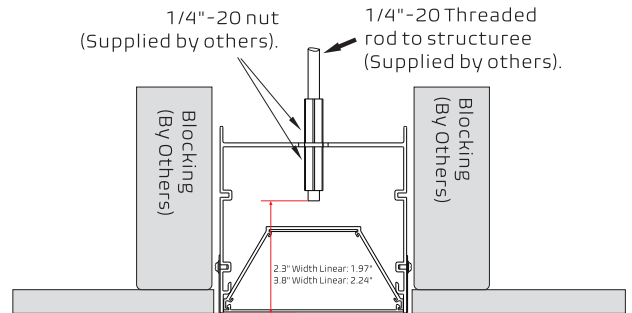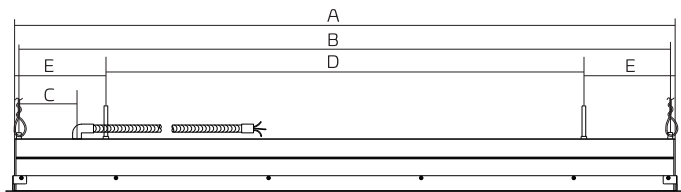


SUGGEST INSTALLATION BEFORE CEILING



\* Lighting fixtures need to be installed before installing ceiling.

## Decoustic Mounting

Top View



Side View

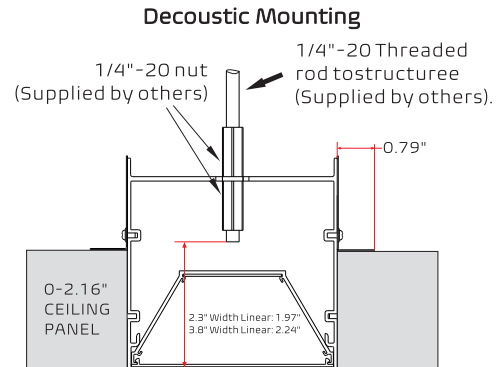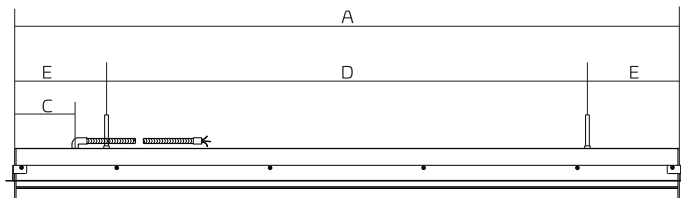

\* Lighting fixtures need to be installed before installing ceiling.

DRY CEILING AND GRID CEILING - DIMENSIONS

Nominal Length	"A" Housing Length	"B" Wire Rope	"C" Feed Location		"D" Rod Spacing	"E" End Suspensions
	Feet	Feet	2.3" Width Linear	3.8" Width Linear	Feet	Feet
2 ft.	1.98'	1.92'	3.58"	4.33"	0.88'	0.54'
3 ft.	2.98'	2.94'	3.58"	4.33"	1.88'	0.54'
4 ft.	3.98'	3.94'	3.58"	4.33"	2.88'	0.54'
8 ft.	7.96'	7.90'	3.58"	4.33"	6.84'	0.54'


**⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**

**IMPORTANT**


1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.
8. The maximum connection of each input line is 40FT in 120AC, 100FT in 277AC.

**SHOCK HAZARD**

**⚡** May result in serious injury or death. Turn power OFF at circuit breaker prior to installation or servicing.



**WIRING**

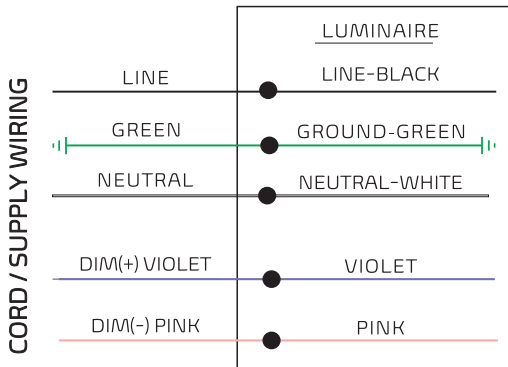

**⚠** Please isolate two dimming wires by P2 terminal individually if no need dimming; Must connect wires with corresponding colors as shown.

**PARTS LISTS**

**MUD-IN DRYWALL**

 <b>A</b> <b>Screws</b> Screws to fix the drywall flange kit to housing	 <b>B</b> <b>PC Diffuser</b> Optional continuous rolling lens which can reach seamless continue runs up to 42' is available.	 <b>C</b> <b>Silicone Seal</b> Note: Silicone seal is used to seal seams that may appear at both ends of luminaires when multiple connections.	 <b>D</b> <b>"L" Joiner</b>
 <b>E</b> <b>"L" Joiner</b>	 <b>F</b> <b>Safety Stud</b>	 <b>G</b> <b>Trim Drywall End Cap</b>	 <b>H</b> <b>1/4"-20 nut</b> Supplied by others


**I**  
**Trim Drywall Flange Kit**

**⚠ RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**


**BEFORE CONNECTING**

**INDEPENDENT INSTALLATION**


① Install end caps as shown




③ Fix the end cap (G) of Trim Drywall to both ends of the fixture with screws (A), and screw the lifting stud (F) onto both ends of the top of the fixture.

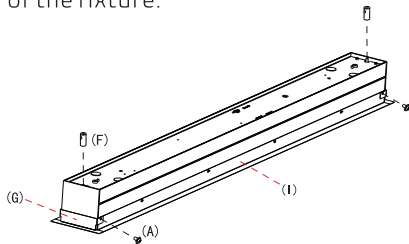


② Install Trim Drywall (I) at both ends of fixture using screw (A)(Only fix the middle hole, Unfixed head and tail hole)



Flange kit bracket need align with luminaire 2 ends




④ Secure the LED modules with aircraft cable and connect the DC male and female terminals.

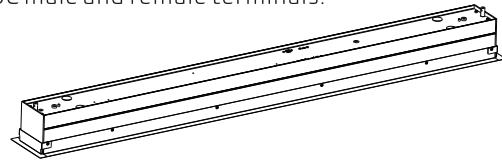


**MULTIPLE LUMINAIRES CONNECTION – LINE CONNECTION**

① Install end caps and line joiners


START OF RUN  
Install end caps and Line joiners as shown

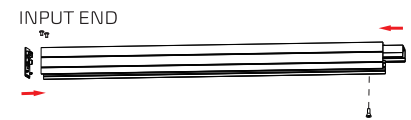




MIDDLE OF RUN  
Install Line joiners as shown

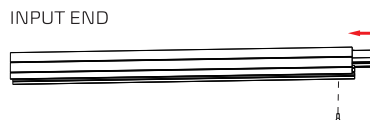




END OF RUN  
Install end caps as shown

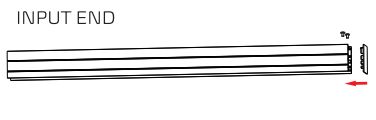

② Install two side trim drywall (I), one side end cap (G) & Safety stud (F)

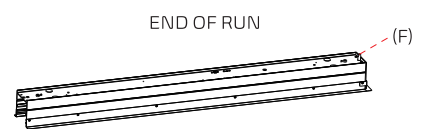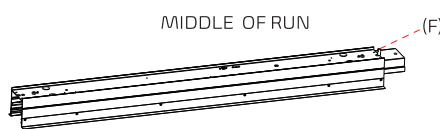
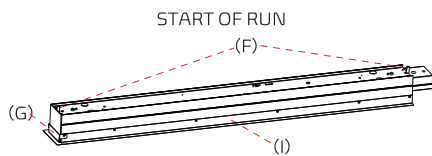


③ Secure the LED modules with aircraft cable and connect the DC male and female terminals

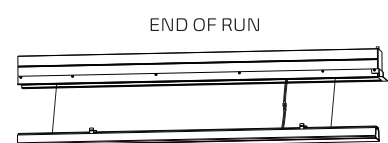
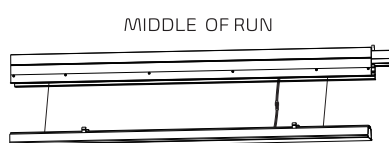
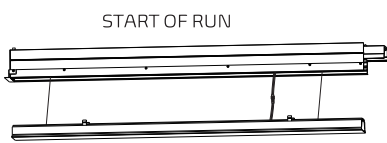


**MULTIPLE LUMINAIRES CONNECTION – L SHAPE CONNECTION**



① Install the end caps



② Install two side trim drywall (I), one side end cap (G) & Safety stud (F)

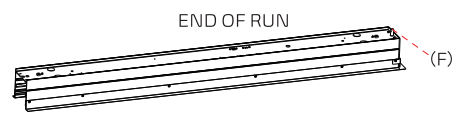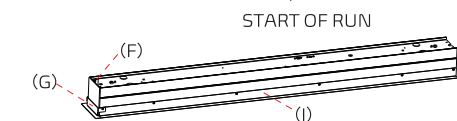


③ Secure the LED modules with aircraft cable and connect the DC male and female terminals

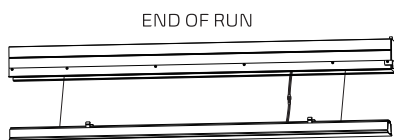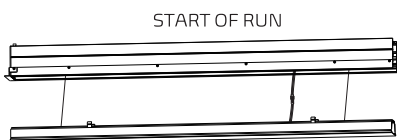




**!** RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.



**5** Wiring

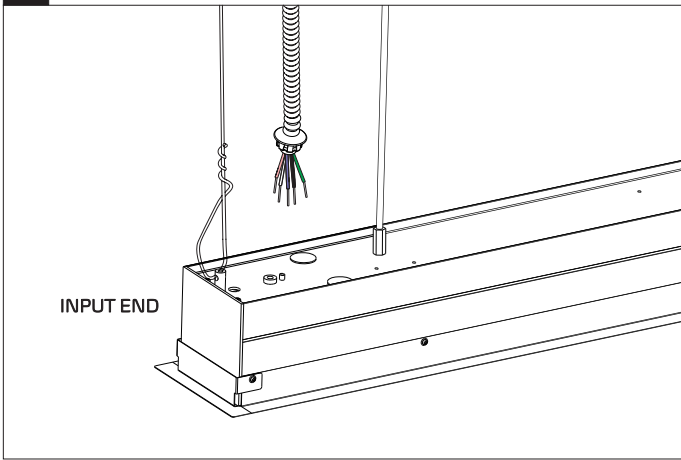



**6** Refer to steps 6-8 for installation of Multiple Luminaires -LINE Connection

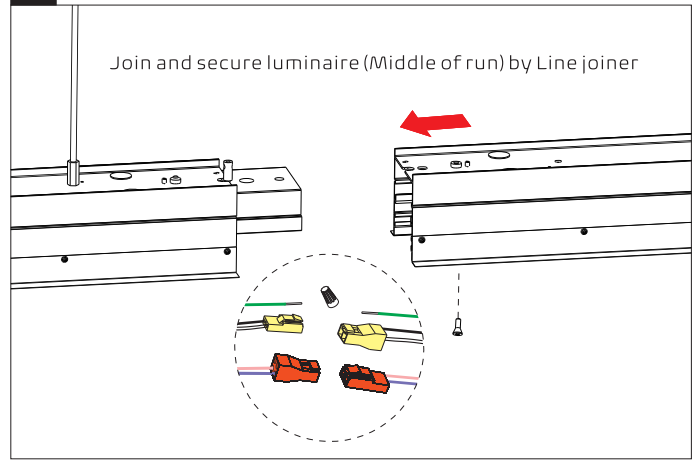

**7** Fix the middle fixture to the ceiling using steel wire ropes and suspension rods.

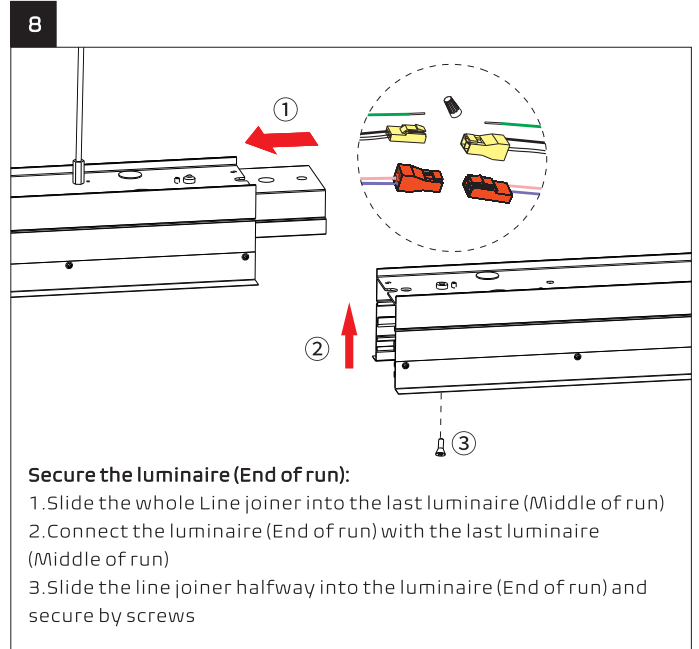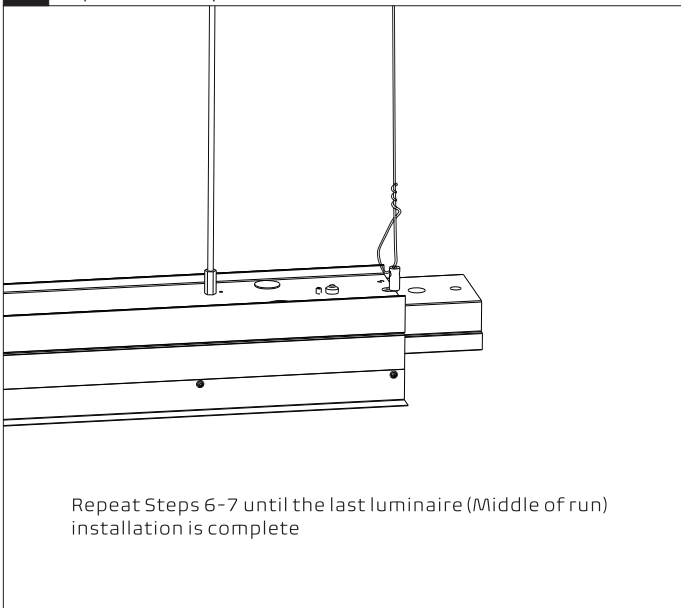

**9** Refer to steps 9-11 for installation of multiple luminaires L connection.

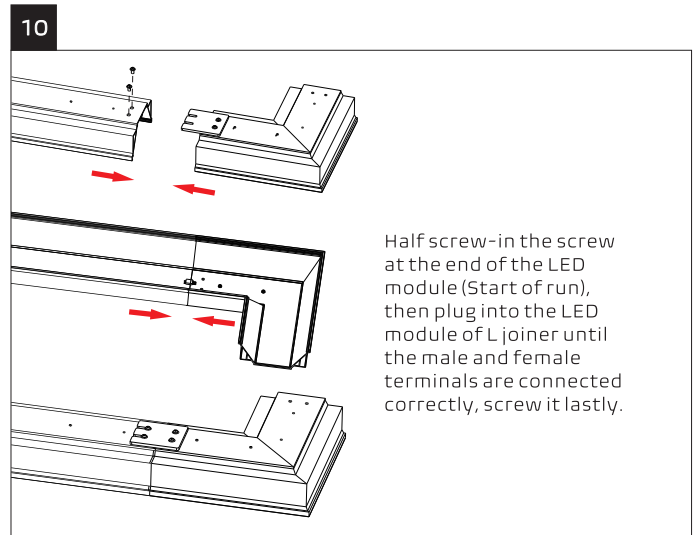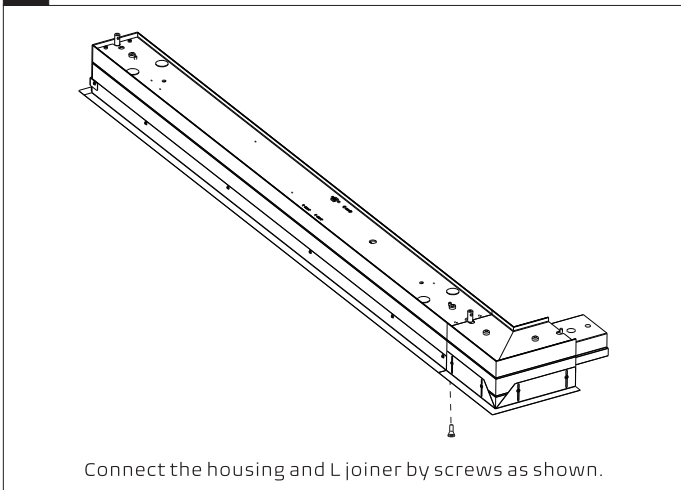

**!** RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

