

SAFETY INSTRUCTION



READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.
Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

MAKE CERTAIN POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.

CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER. USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.

MAINTENANCE CAUTION



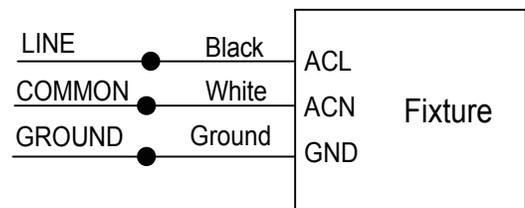
1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance must be done by professionals.

WIRE CONNECTION



Voltage permits operation at 120VAC thru 277VAC, 50 or 60 Hz.

Make the following Electrical Connection:

- a). Connect the voltage supply line to ACL in Black.
- b). Connect the voltage supply Neutral to ACN in White.
- c). Connect ground lead to the supply ground lead.
- d). If Dimming is an option; connect the purple dimming positive lead to the supply dimming positive lead. If dimming is not being used, ensure to cap off the purple lead.
- e). If Dimming is an option; connect the grey dimming negative lead to the supply dimming negative lead. If dimming is not being used, ensure to cap off the grey lead.



ACCESSORY PACK







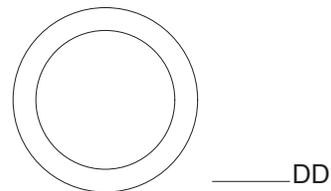



Part	Description	Quantity
AA	Knob terminal block	5
BB1	Mounting screws #6-32*3/4	2
BB2	Mounting screws #8-32*3/4	2
CC	Mounting brackets	1
DD	Mounting cushion	1

INSTALLATION

WARNING

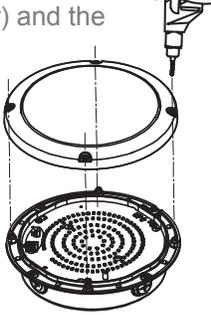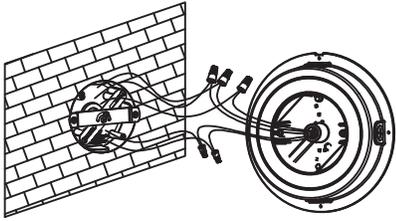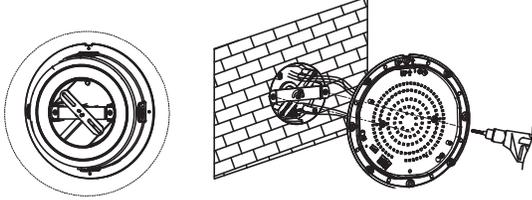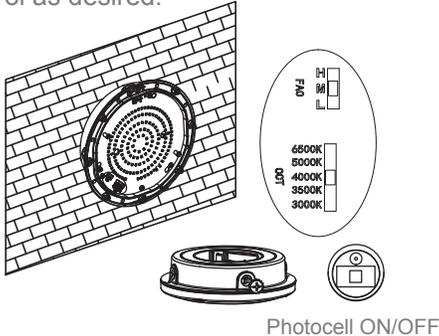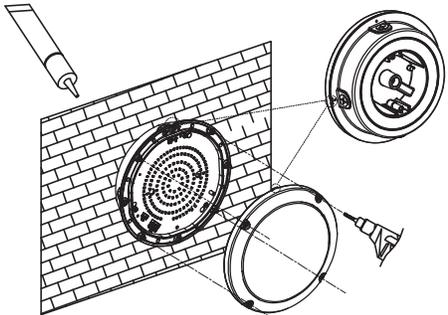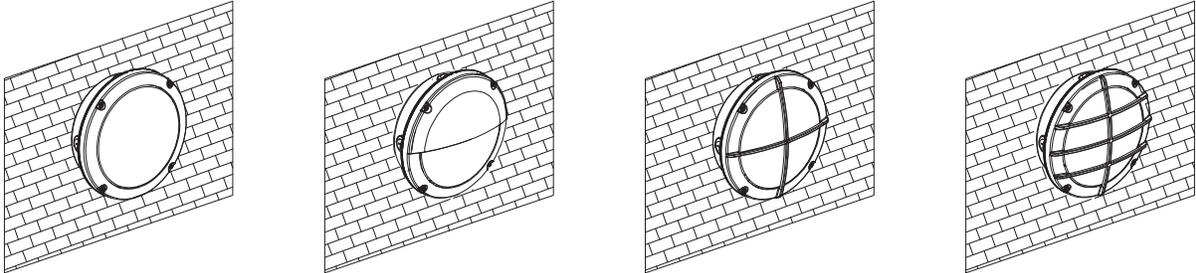Risk of injury or damage. Make certain power is OFF before installing or maintaining fixture.

<p>Step 1: Fix the mounting bracket to the J-BOX.</p> 	<p>Step 2: Glue the mounting foam to the fixture body.</p> 	<p>Step 3: Separate the face frame (with cover) and the fixture body.</p> 
<p>Step 4: Wiring</p> 	<p>Step 5: Fix the fixture body to the mounting bracket. Note: The mounting bracket must be embedded in the positioning groove of the fixture.</p> 	
<p>Step 6: Adjust power and color temperature and light control as desired.</p> 	<p>Step 7: Apply glue around the fixture body and fix the faceplate.</p> 	
<p>Complete</p> 		

WATTAGE/CCT/PHOTOCONTROL SETTING

Remove (4) screws to open the faceplate . Desired wattages and CCT can be set by selecting the combination on the DIP switches. See Figure 1.

Remove the Knock Out Nut. Photocontrol can be turned on or off by the DIP switch. See Figure 2.

Wattage default setting: 30W (H=30W, M=24W, L=18W)

CCT default setting: 4000K

Photocontrol default setting: OFF

Attentions:

Please do not touch the LED chips and be sure that the gasket on the face plate is well sealed during the operation process.

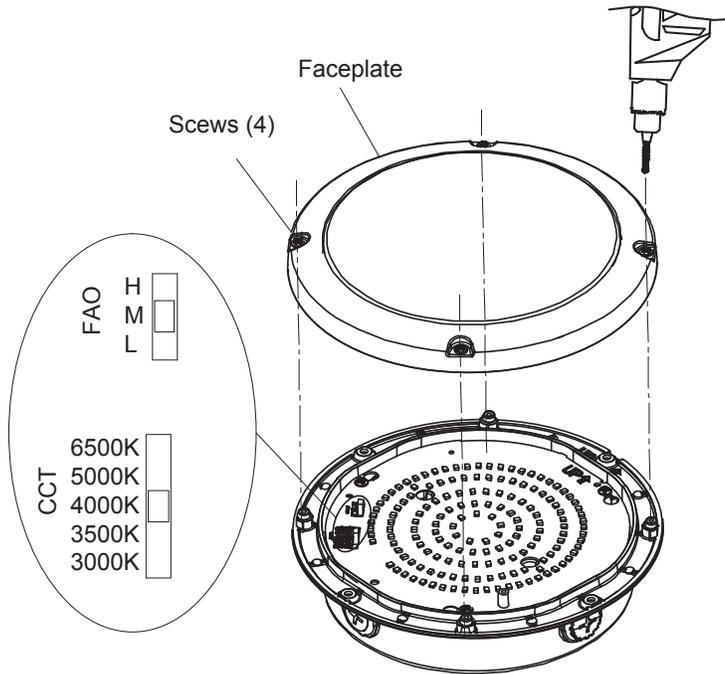


Figure 1

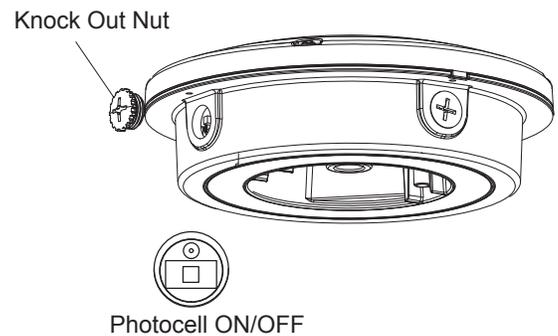


Figure 2