

OPAL LED WRAPAROUND LIGHT

3500K	4000K	5000K
32W	40W	48W
SELECTABLE		



PRODUCT DESCRIPTION

The low-profile OPAL led wraparound light with metal housing, milky polycarbonate end cap and diffuser provides widespread illumination. This cost effective LED utility wrap fixture provides high uniformity, excellent efficiency and reduced glare. Use in a wide variety of applications such as open offices, private offices, conference rooms, reception areas, retail, hallways, industrial assembly, retail open areas and educational facilities.

FEATURES

- Simple and elegant low-profile appearance
- Optical milky lens delivers unique beam angles and reduces glare
- 4ft and 2ft are available
- Wattage selectable is for 4ft
- CCT selectable is for 4ft

ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Operating temperature range: -4-104°F (-20-40°C)
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

PERFORMANCE

CRI

80

CCT

3500K, 4000K, 5000K

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-4-104°F (-20-40°C)


Certifications

- cULus conforms to UL Std. 1598Cert. to CSA Std. C22.2 No.250.0
- RoHS compliant

SPECIFICATION


2FT

Net Weight : 2.65lbs (1.2kg)

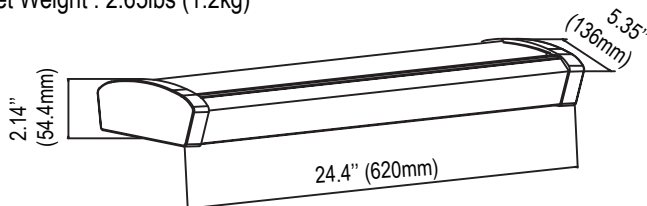

4FT

Net Weight: 3.75lbs (1.7kg)

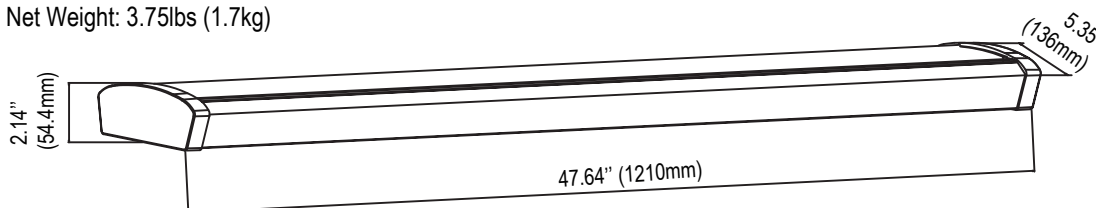

Ordering Information

Example: OWRP12DSPSW1

Name	Dimension	Dimmable	Watts	CCT	Voltage	Lens	Control
OWRP	06 - 2FT ¹	D - 0-10V Dimmable	20 - 20W	35 - 3500K 40 - 4000K 50 - 5000K	1 - 120-277V	Blank - Milky Polycarbonate Lens	Blank - None
	12 - 4FT ¹		SP - Selectable Power 32W/40W/48W ²	SW - Selectable White 3500K/4000K/5000K ³			

Notes:

1. Only 4ft is selectable.
 2. 48W is default setting, If need other wattage, please contact Customer Service in advance to change the setting in factory or change the setting in the field.
 3. 4000K is default setting. If need other CCT please contact Customer Service in advance to change the setting in factory or change the setting in the field.
- * Minimum order required, please contact customer service for additional information.
 - * White finish is standard. Additional charge will apply for optional finish.

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Size	Nominal Lumen	CCT	CRI	LPW
20W	2FT	2300lm	4000K	>80	115
32W	4FT	3680lm	4000K	>80	115
40W	4FT	4600lm	4000K	>80	115
48W	4FT	5520lm	4000K	>80	115

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -4-104°F (-20-40°C).

Ambient		Multiplier
Celsius	Fahrenheit	
0	32	1.02
10	50	1.01
20	68	1.00
25	77	1.00
30	86	1.00
40	104	0.99

Warranty

Five year limited warranty. Full warranty terms located at www.abovealllighting.com/warrantystatements

Note:

Specifications subject to change without notice.