

SUITABLE FOR MODEL**SAFETY INSTRUCTION:**

READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USING. Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

MAKE CERTAIN POWER OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.

CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER, USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.

WARNING:**RISK OF ELECTRICALSHOCK**

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION:**RISK OF INJURY**


- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

CAUTION:**RISK OF FIRE**

- Keep combustible and other materials that can burn away from luminaire and lamp/lens.
- MIN 90°C SUPPLY CONDUCTORS.

WIRE CONNECTION

Universal Voltage permits operation at 120VAC thru 277VAC, 50 or 60 Hz.

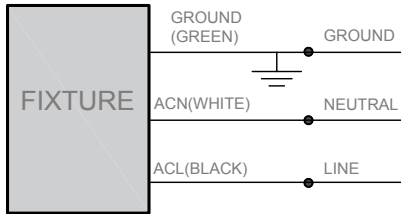

Make the following Electrical Connection:

- Connect the voltage supply line to ACL in Black.
- Connect the voltage supply Neutral to ACN in White.
- Connect Green ground lead to the supply ground lead.

INSTALLATION

ACCESSORY PACK




WIRE NUT X 3



EXPANSION PIPE X 4



M4 SCREW X4



MOUNTING BRACKET X 2




V-CLIP X 2

SURFACE MOUNT

- Turn off the power.
- Drill $\Phi 0.24''$ holes according to following drill pattern.
- Insert $\Phi 0.24''$ expansion pipes(4) in the ceiling or wall. Fix the Mounting Brackets (2) to ceiling or wall by M4 Screws (4). See Figure 2.
- Push the Fixture into the Bracket Slot. See Figure 3.
- Connect wires as shown in wiring diagram with wire nuts.

Drill Pattern for 4ft



Drill Pattern for 8ft




Figure 1

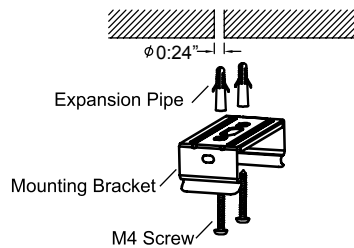


Figure 2

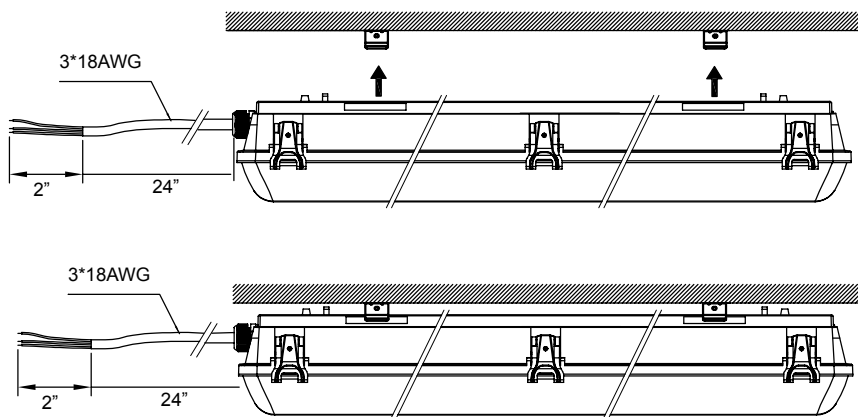


Figure 3

CHAIN MOUNT

1. Install the Mounting Brackets (2) on luminaire.
2. Feed supplied V-Clips into holes of Mounting Brackets.
3. Attach customer supplied Chain to the V-Clips and mounting surface. Make sure the luminaire is balanced.
4. Connect wires as shown in wiring diagram with wire nuts.

