

Integrate T-Grid Linear

2021-06



Length




Width



9/16"



15/16"

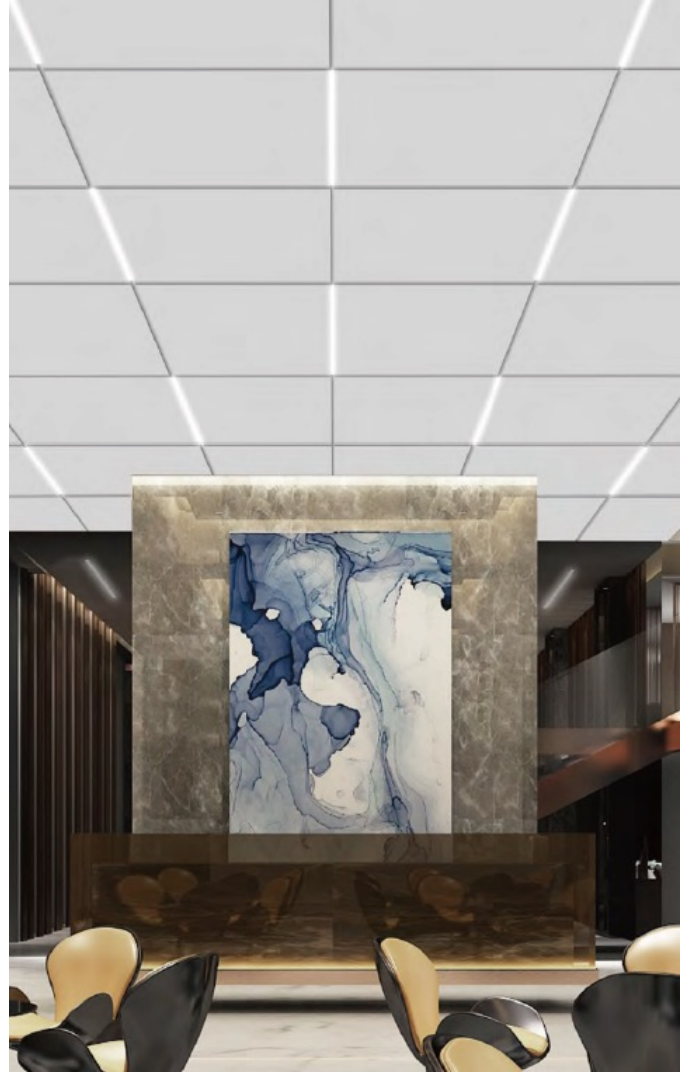

Versatile Compatibility To Various T-Grids

9/16" Flat



Suprafine® XL

9/16" Slot



Silhouette®
1/4" XL



Silhouette®
1/8" XL

9/16" Interlude




Interlude® XL



Sonata® X L

15/16" Flat



Prelude® XL



Clean Room

PERFORMANCE

- Wattage: 10W@2FT; 20W@4FT
- Length: 2FT and 4FT
- Width: 9/16 "and 15/16 "
- Lumen output: 1150lm @ 2FT; 2300lm @ 4FT
- CRI: 80Ra
- CCT: 2700K, 3000K, 4000K, 5000K
- Voltage: 120V-277V
- Working Temperature: -4-104°F (-20-40°C)





1

Slim Profile

Integrated To The T-grid Ceiling

2

Triple-side

Unique optic design

③ Continuous Run






④ Mounting brackets and led module are detachable

5 Remote Driver
3 pieces fixtures per driver

6 RJ45 terminals
for easy driver connection

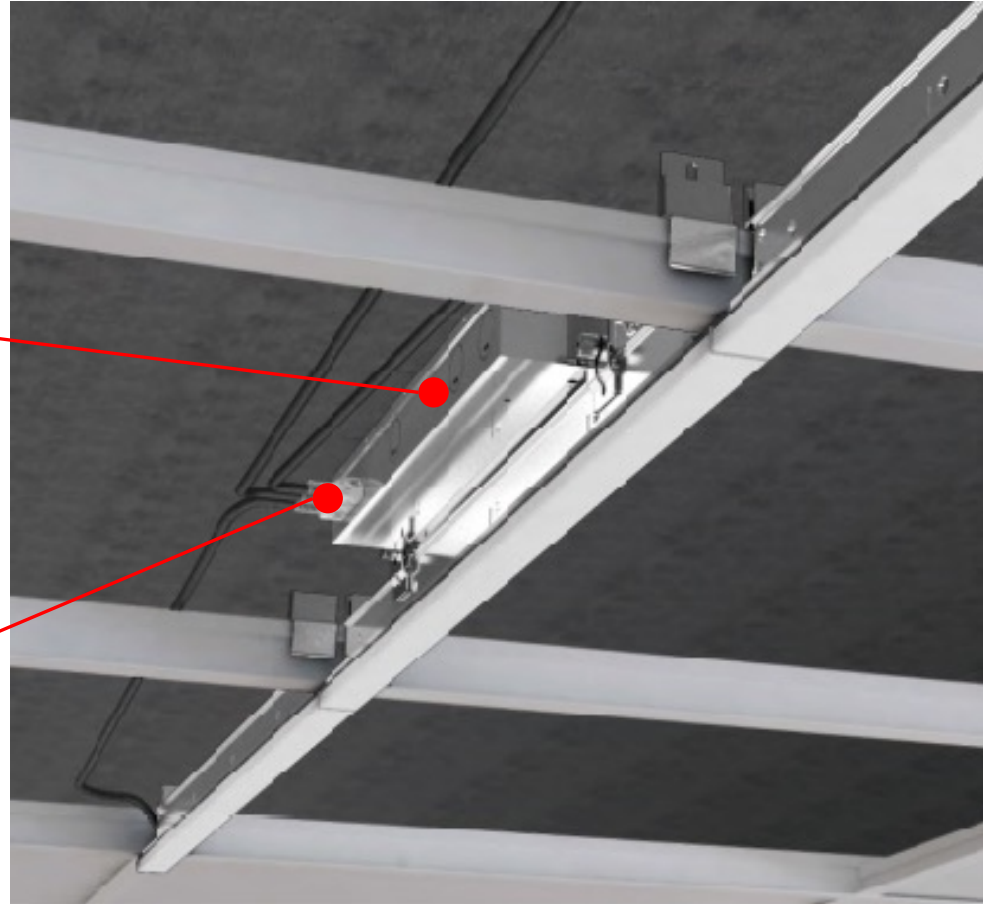

⑦ Flexible lighting patterns

