



# **VISION** Strip Light

---




***Above All Lighting's Vision LED strip light has a sleek design with a diffuser lens. Optical accessories include EBU and motion sensor. It can be used in stairwells, warehouses, offices, garages, shop displays, and other commercial applications.***

# FEATURE

- 8% up-light and no glare
- 



- **Built-in** sensor
- 

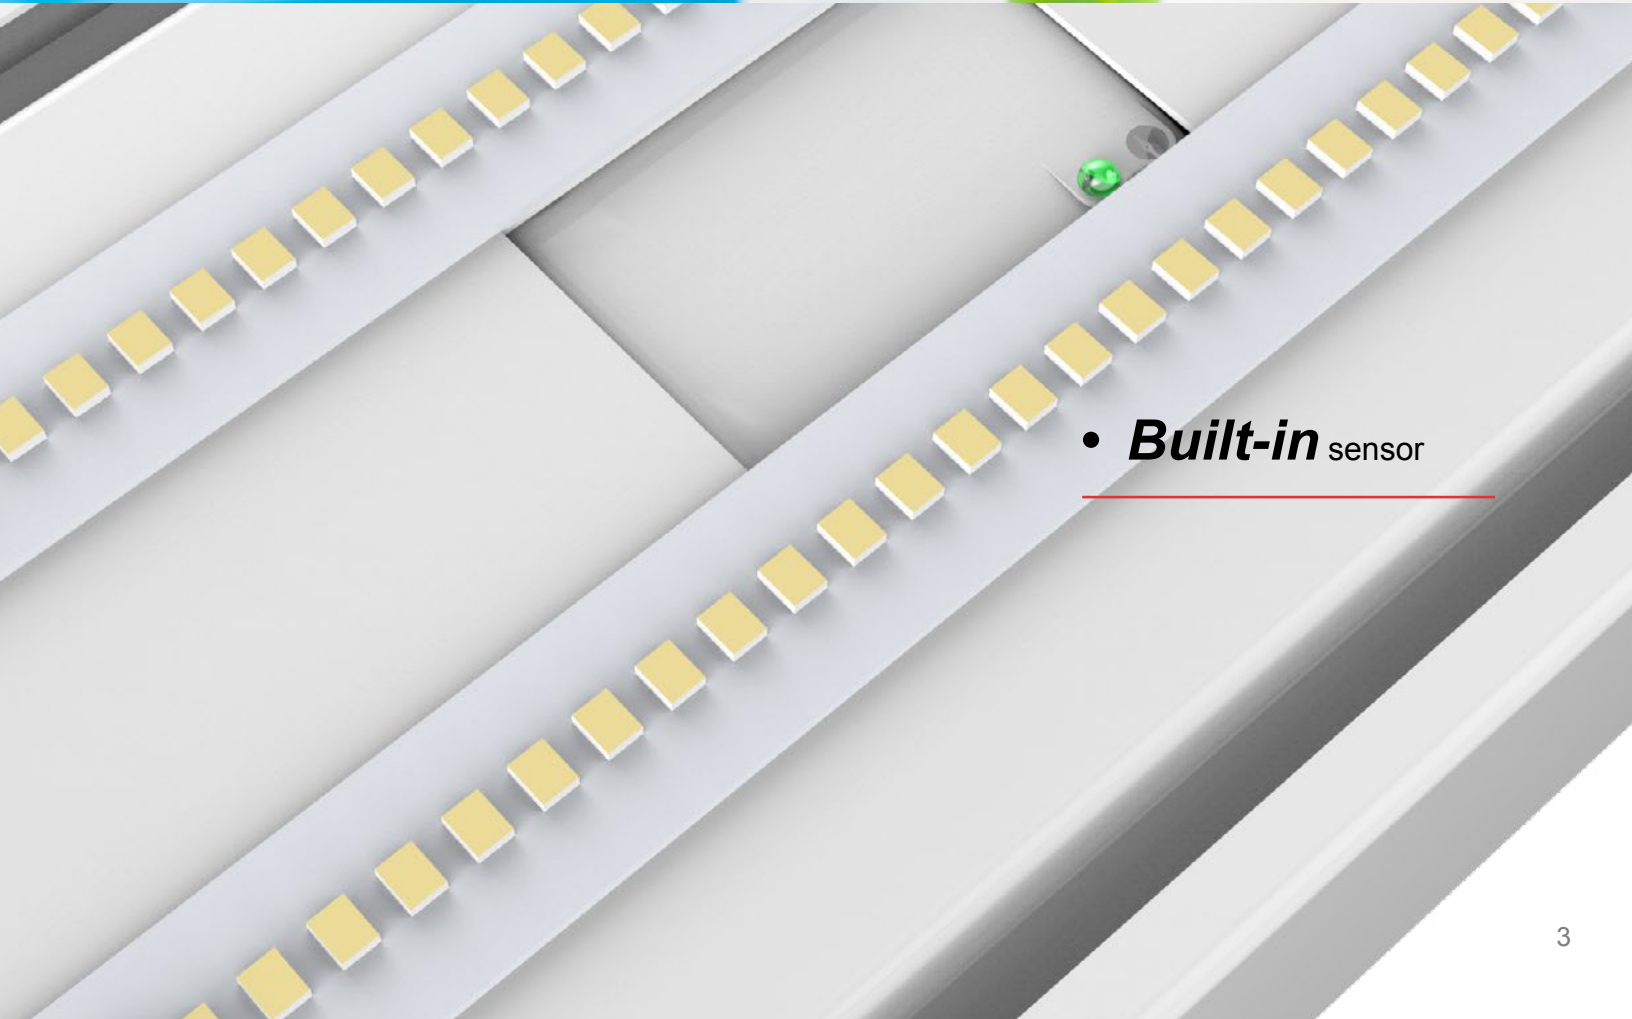






**EBU** backup available  
The standard emergency test button is plastic. Metal  
emergency test button is optional



- **Easy to wire** end and back side wire entries available, meet different junction box locations.

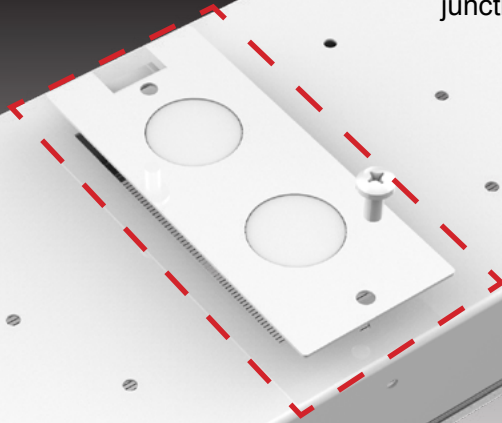

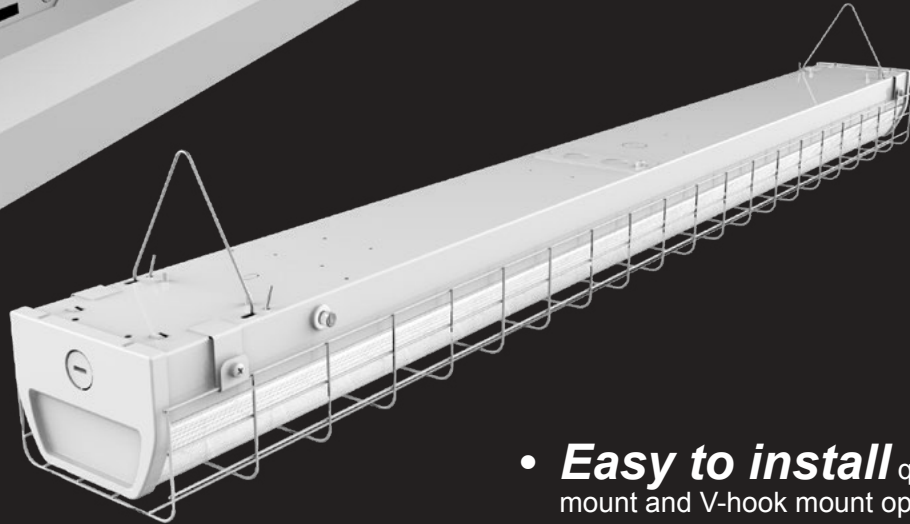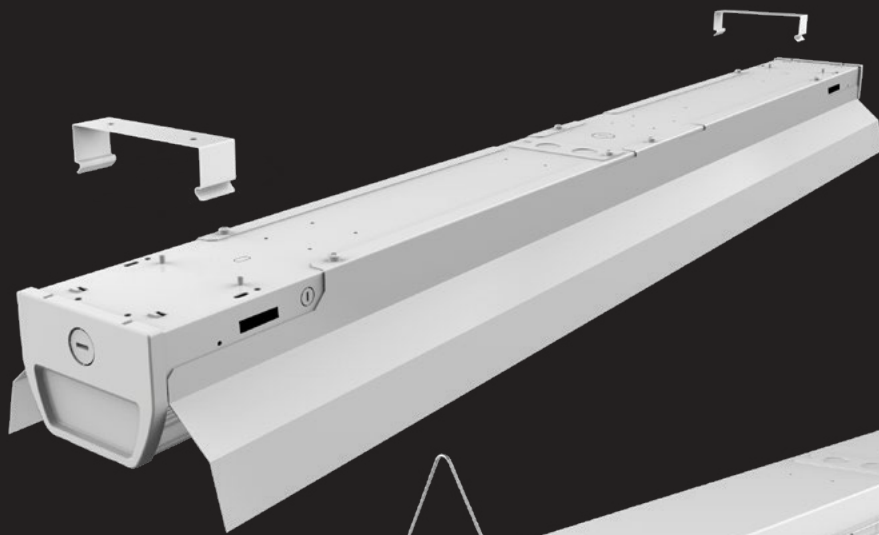


- **Easy to install** quick surface mount and V-hook mount optional, no need to open the housing.

## MOUNTING



Surface Mount

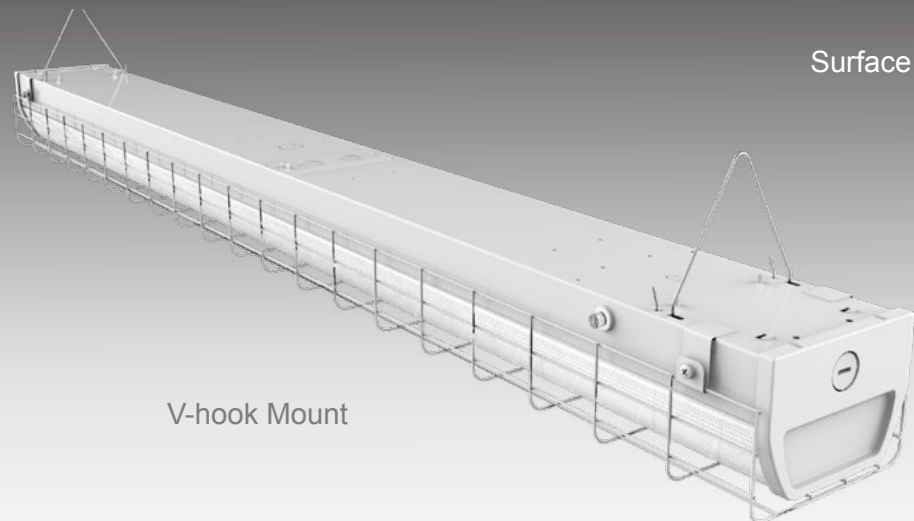

V-hook Mount

# ACCESSORIES (ORDERED SEPARATELY)



**90237**  
STRP06-WG  
Wire guard for 2ft strip



**90240**  
STRP06-RF  
Reflector 2ft strip

**90242**  
STRP12-RF<sup>2</sup>  
Reflector 4ft and 8ft strip



**90243**  
STRP-VH<sup>4</sup>  
V-hooks for strip



**90264**  
STRP-QSMK<sup>3</sup>  
Quick surface mount kit for vision strip




**90759**  
STR-PMK  
Pendant Mount Kits for strip (a pair)

**Notes:**


1. If for 8ft please order two pieces.
2. If this reflector will be installed at one side, then one piece for 4ft and two pieces for 8ft. If this reflector will be installed at both two sides, then two pieces for 4ft and four pieces for 8ft.
3. Two pieces are needed for 2ft, 3ft and 4ft . If for 8ft please order three pieces.
4. Soft chain mount with V-hooks is the best choice if fixture is with MSW or MSWO and needed to be installed on a ceiling of long time vibration.




4FT Reflector with EBU

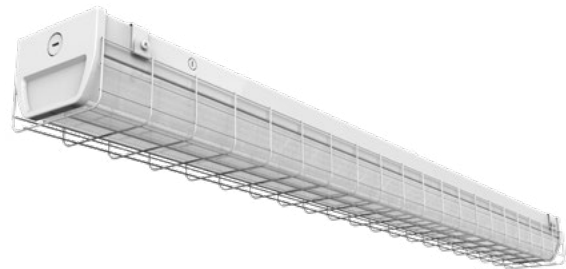

4FT Wire guard with EBU

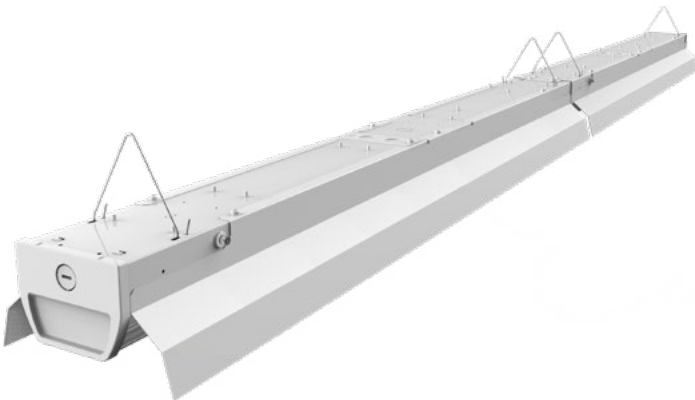

8FT Reflector with EBU

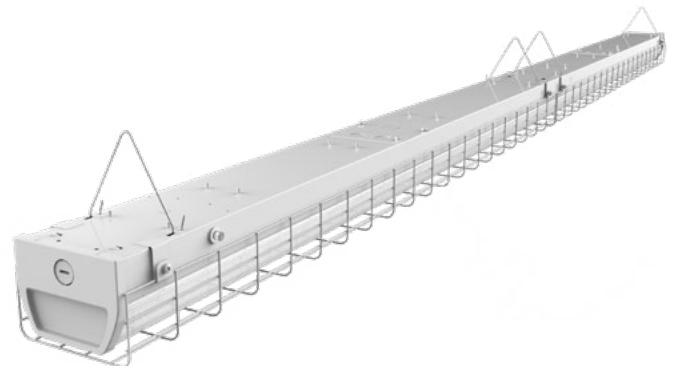

8FT Wire guard with EBU

# PERFORMANCE DATA

## Frosted Lens

Watts	Lumen Output	Measured Watts	Size	CRI	AC Input 120V	CCT	LPW
20	3000	20	2FT	80	0.18A	5000K	150
30	4500	30	3FT	80	0.24A	5000k	150
30	4500	30	4FT	80	0.28A	5000K	150
45	6900	46	4FT	80	0.41A	5000K	150
60	9000	60	8FT	80	0.50A	5000K	150
85	11600	80	8FT	80	0.67A	5000K	145

## Clear Lens

Watts	Lumen Output	Measured Watts	Size	CRI	AC Input 120V	CCT	LPW
20	3160	20	2FT	80	0.18A	5000K	158
30	4740	30	3FT	80	0.24A	5000K	158
30	4740	30	4FT	80	0.28A	5000K	158
45	7268	46	4FT	80	0.41A	5000K	158
60	9480	60	8FT	80	0.50A	5000K	158
85	12240	80	8FT	80	0.67A	5000K	153

## 347V Frosted Lens


Watts	Lumen Output	Measured Watts	Size	CRI	AC Input 347V	CCT	LPW
20	3000	20	2FT	80	0.06A	5000K	150
30	4500	30	3FT	80	0.07A	5000k	150
30	4500	30	4FT	80	0.09A	5000K	150
45	6900	42	4FT	80	0.12A	5000K	150
60	9000	60	8FT	80	0.17A	5000K	150
85	11600	80	8FT	80	0.23A	5000K	145






## ABOVE ALL Lighting, Inc.

---

 1135 Thomas Busch Highway,  
Pennsauken, NJ 08110

 866-222-8866

 [info@abovealllighting.com](mailto:info@abovealllighting.com)

 [www.AboveAllLighting.com](http://www.AboveAllLighting.com)

©2019 ABOVE ALL all rights reserved