



## CANOE LED PENDANT LIGHT



### PRODUCT DESCRIPTION

The Canoe pendant body is constructed of high quality, die-cast aluminum alloy, and features a recessed honeycomb lens. This honeycomb cellular light control system reduces the glare effectively. In addition, the lamp body can be ordered wrapped in attractive acoustic style fabric. This fixture is ideal in offices, conference rooms, public buildings, libraries, and other commercial lighting applications.

### FEATURE


- Aluminum alloy body and die-casting ends
- Honeycomb lens
- Various fabric colors available

### ELECTRICAL SYSTEM

- Input Voltage: 120-347V, 50/60Hz
- 0-10V Dimming optional
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

### SPECIFICATION

Cable and cord length: 59" (1500mm) standard  
\*Please contact Customer Service if need special length.  
Net Weight: 8.2 lbs / 3.7 kg

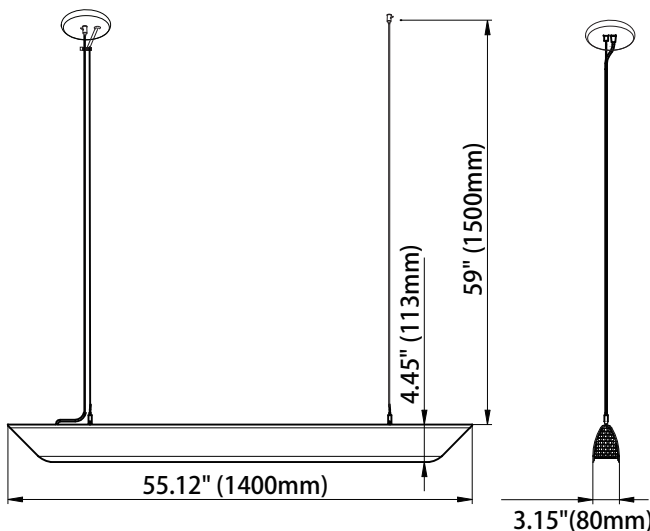

### PERFORMANCE

#### CRI

- 80 is standard
- 90 is optional

#### CCT

3000K, 3500K, 4000K

#### Dimming

0-10V Dimming

#### Projected Lifetime

L70 - 100,000 Hours

#### Working Temperature

-4-104°F (-20-40°C)

#### Certifications

- cETLus conforms to UL Std. 1598  
Cert. to CSA Std. C22.2 No.250.0
- Suitable for dry locations
- RoHs compliant

## Ordering Information


Example: CANO38-40808-WH

Series	Watts	CCT	CRI	Voltage	Installation	Controls	Housing Finish	Fabric Finish
CANO	38 - 38W	- 30 - 3000K	80 - 80Ra <sup>1</sup>	8-120-347V	Blank -Pendant	- Blank-None	- WH -White <sup>2</sup>	- Blank-No Fabric <sup>3</sup>
		35 - 3500K	90 - 90Ra <sup>1</sup>				BK -Black	GY -Grey
		40 - 4000K						BU -Blue


Notice:

- 80CRI is standard. 90 CRI can be available for an additional fee. Please contact customer service.
- White housing finish is standard. Other finish colors might be available for an additional fee. Please check with Customer Service for details.
- No fabric is standard. Different colorful fabrics will be available for an additional fee. Please check with Customer Service for details.

## Color Options

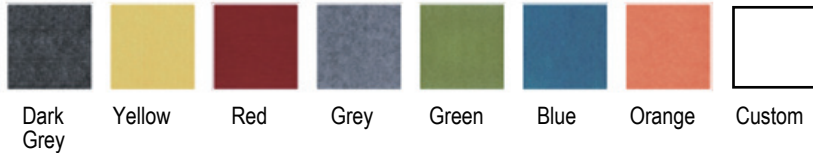

## Illumination Ratio



## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	AC Input 120V	CCT	CRI
38	2000	0.32A	4000K	80

## Warranty

Five year limited warranty.

## Note:

Specifications subject to change without notice.