



WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

SAFETY: This fixture must be wired in accordance with the national electrical code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe the grounding procedure under installation section. All work should be done by a qualified electrician.

> **RISK OF ELECTRIC SHOCK** - Disconnect power at fuse or circuit breaker before installing or servicing.

> **RISK OF PERSONAL INJURY** - Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

WARNING: Make certain power is OFF before starting installation or attempting any maintenance.

INSTALLATION

1. Fix the mounting plate on the wall. (Fig 1)

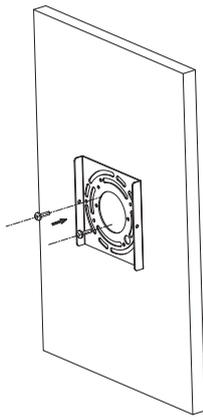


Fig 1

2. Connect the corresponding terminals according to the wiring diagram, connect L, N, and ground wires properly. (Fig 2)

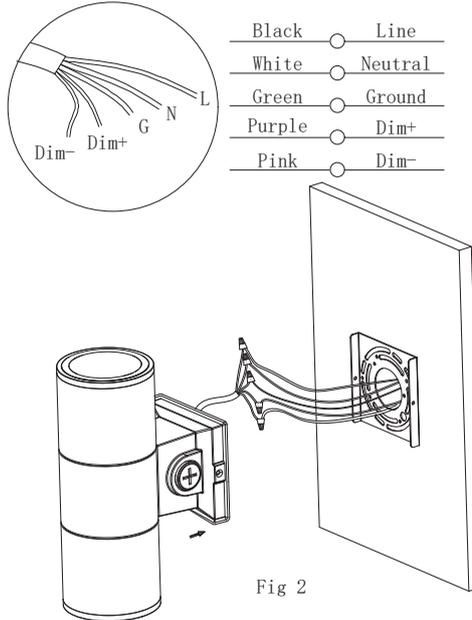


Fig 2

3. Fix the fixture with screws. (Fig 3)

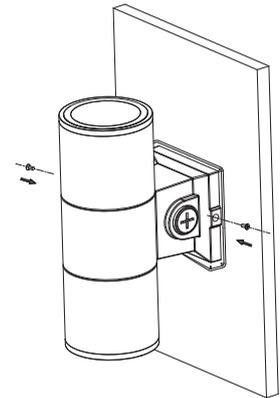


Fig 3

4. Fix the Mounting Plate on the J-Box. (Fig 4)




Fig 4

5. Connect the corresponding terminals according to the wiring diagram, connect L, N, and ground wires properly. (Fig 5)

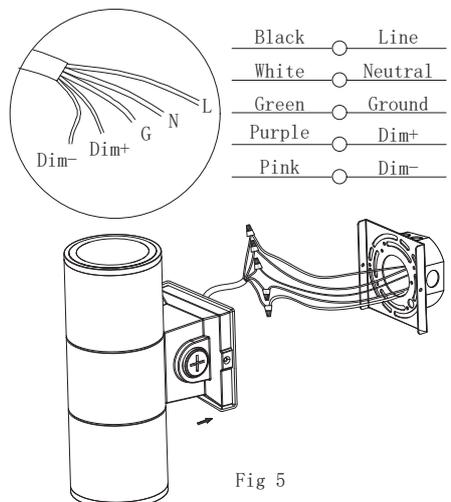


Fig 5

6. Fix the fixture with screws. (Fig 6)





Fig 6

SELF-REPLACEABLE REFLECTORS

1. Twist off the top cover. (Fig 7)
2. Remove the reflector. (Fig 8)
3. Replace with new reflector. (Fig 9)
4. Screw on the top cover. (Fig 10)

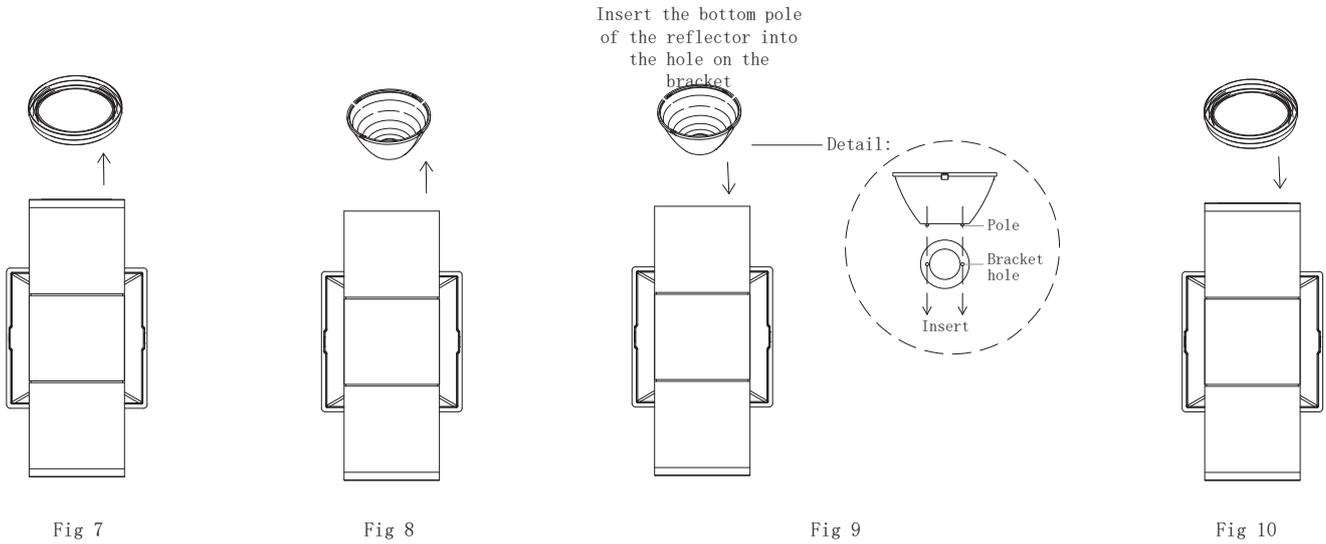

WATTAGE & CCT SELECTABLE GUIDANCE

Factory Default Setting:

Watt: 35W @ 6inch
20W @ 4inch
10W @ 3inch

CCT: 3000K

Photocell: OFF

Light control: Full

| | 3inch | 4inch | 6inch |
|---|-------|-------|-------|
| <input checked="" type="checkbox"/> XW = 10 | 20 | 35 | |
| <input type="checkbox"/> YW = 8 | 16 | 29 | |
| <input type="checkbox"/> ZW = 6 | 12 | 22 | |

