

Post Top Series





Moon Series Post Top

- Easy and convenient for installation
- Lightweight design and low EPA minimize pole load
- Die-cast aluminum housing and excellent thermal management
- IES distribution Types II, III & V for various applications
- Tempered glass lens doesn't fade and discolor
- Multi-level motion sensor, photocontrol and 3/5/7-pin NEMA receptacle options



- Die-cast aluminum housing and excellent thermal management



- Easy installation only 2.5 minutes




- Multi-level motion sensor, photocontrol and 3/5/7-pin NEMA receptacle options



Pavilion Post Top

- Up to 120LPW
- IES distribution Types II, III, IV & V for various applications
- Diffused glass lens panels for option
- Photocontrol & 3/5/7 PIN NEMA receptacle optional
- Integral 10KA surge suppression protection standard

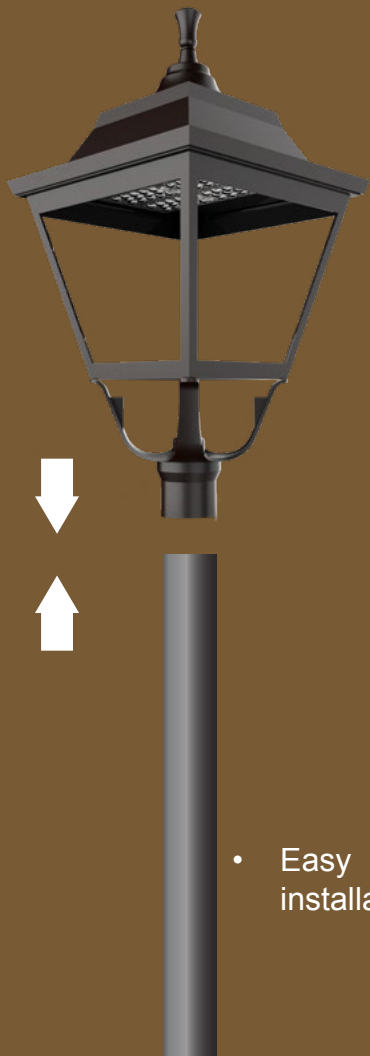

- Diffused glass lens panels for option

- Easy installation only


- Wall mount bracket available





Eunique LED Post Top

- Sleek single arm design.
 - Photocontrol and microwave motion sensor optional.
 - Tempered glass lens doesn't fade and discolor.
 - IES distribution Types III, IV and V for various applications.
-
- Tempered glass lens doesn't fade and discolor.

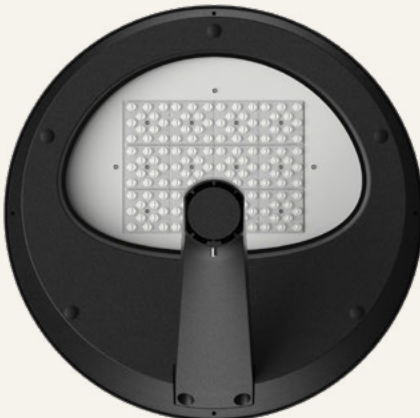


- Photocontrol and microwave motion sensor optional.





Eunike GEN2 LED Luminaire

- Different mounting arms available
- Three CCT selectable
- 30%, 50%, 75% and 100% power selectable
- Efficiency up to 150LPW
- Various precise optical lenses
- Tool-less maintenance
- Compitable with NEMA socket

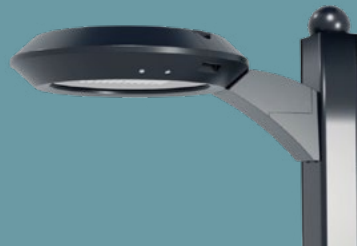



Versatile Post Top

- Bell and petunia shades available.
- Photocontrol and microwave motion sensor optional.
- Tempered glass lens doesn't fade and discolor.
- IES distribution Types I, II & VN for various applications.



Bollard Series





Eunike LED Bollard with Photocontrol

- Simple and sleek design
- 20" and 43" height available
- Photocontrol is available
- Emergency battery back-up available
- IP66 rated for wet location




- Emergency battery back-up available






Sceley LED Bollard

- 18.7" and 42" height available
- Wattage and CCT selectable
- Efficiency is up to 130lm/W
- IP65 rated for wet location

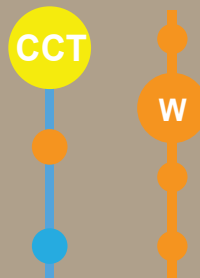

- Efficiency is up to 130lm/W

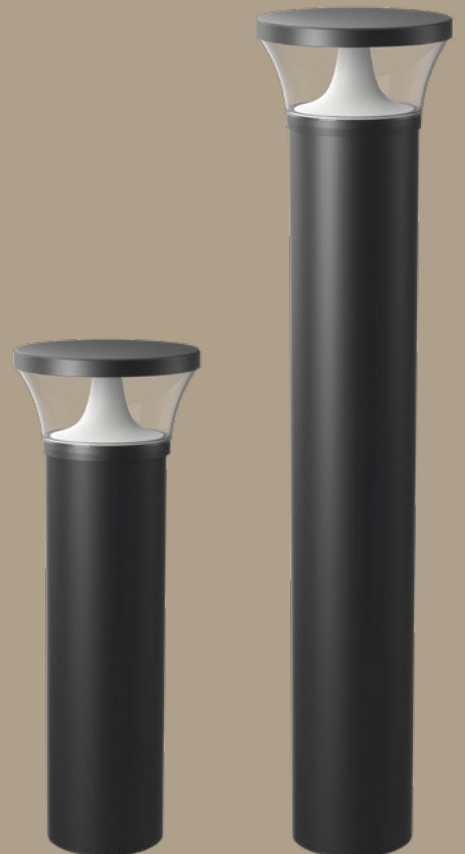




CHESS LED Bollard

- Die cast aluminum body
- Tempered safety glass
- IP65 rated for wet location



- Tempered safety glass

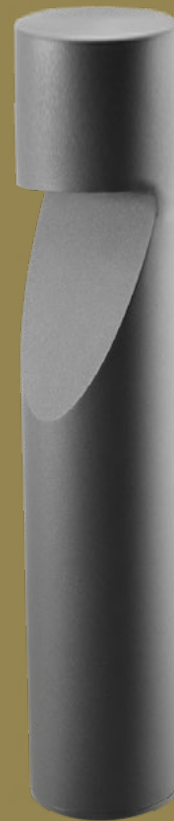



MACK LED Bollard

- Fully shielded design
- Die cast aluminum body
- Tempered safety glass
- IP65 rated for wet location



Tempered safety glass





Versatile Series LED Bollard

- Simple and sleek design
- symmetric and asymmetric distributions
- House side shield available
- 20" and 35" high options
- IP 65 rated for wet location

House side shield available






Louvers Round LED Bollard

- Louver and a rounded, cylindrical design
- High quality extrusion aluminum body
- Dome and flat top for option
- 32" and 42" high options
- IP 65 rated for wet location



Selectable Square LED Bollard



- Square-shaped and architectural appeal
- High quality extrusion aluminum body
- Stainless steel, silicone rubber sealing
- 32" and 42" high options
- IP 66 rated for wet location

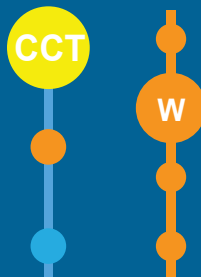



Selectable Standard LED Bollard

- Dome, flat and peak tops for option
- Wattage and CCT selectable
- 32" and 42" high options
- High quality extrusion aluminum body
- Stainless steel, silicone rubber sealing
- IP 66 rated for wet location
- Side shield for option

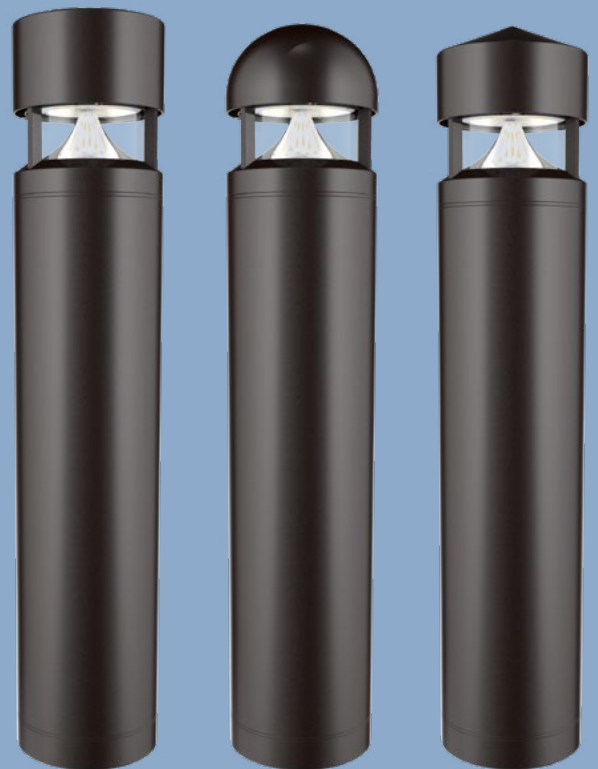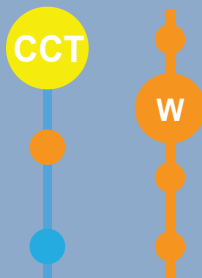

Dome, flat and peak tops




Pillar Square LED Bollard

- Die cast aluminum body
- Tempered safety glass
- IP65 rated for wet location
- Glare-free illumination



Pillar Round LED Bollard

- Die cast aluminum body
- Tempered safety glass
- IP65 rated for wet location
- Glare-free illumination

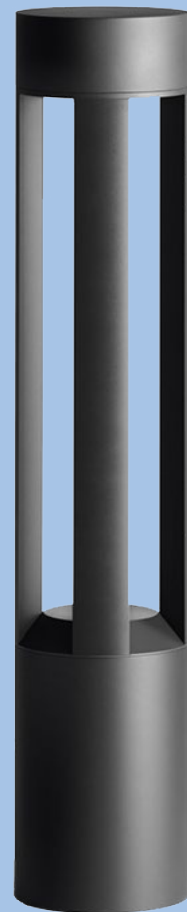



BLOCK LED Bollard

- vertical illuminance perfect for architectural elements
- Aluminum body
- 23"and 30" height available

23"and 30" height available



MIKI LED Bollard

- Shielded 180° light distribution
- 13" and 32" height available




Shielded 180° light distribution




Venus LED Bollard

- SLIM DESIGN
- Glare-free illumination
- Die-cast and extruded aluminum Body

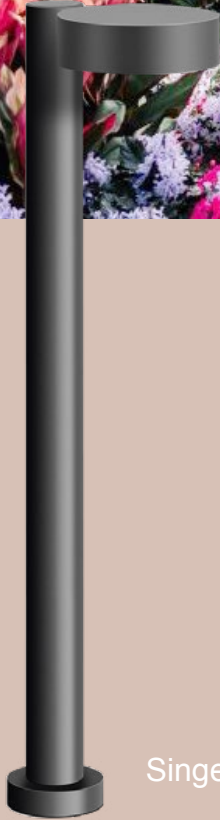

Singel Head

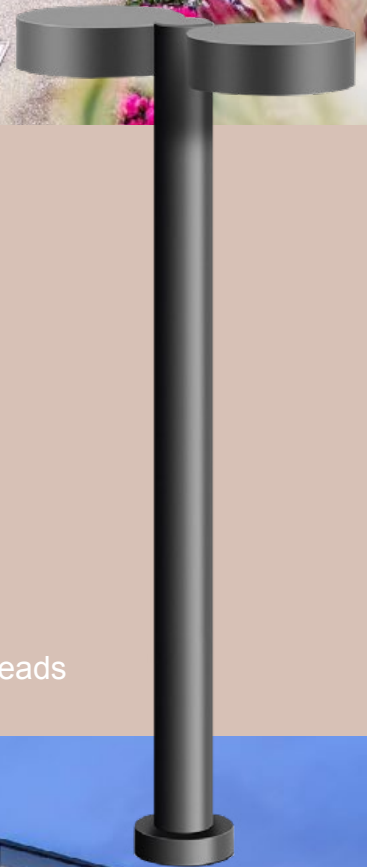

Twins Heads






Family product-MPT, MLB


Moon Series LED Bollard

- Family product-MPT, MLB
- Light distribution typell,III,IV,V

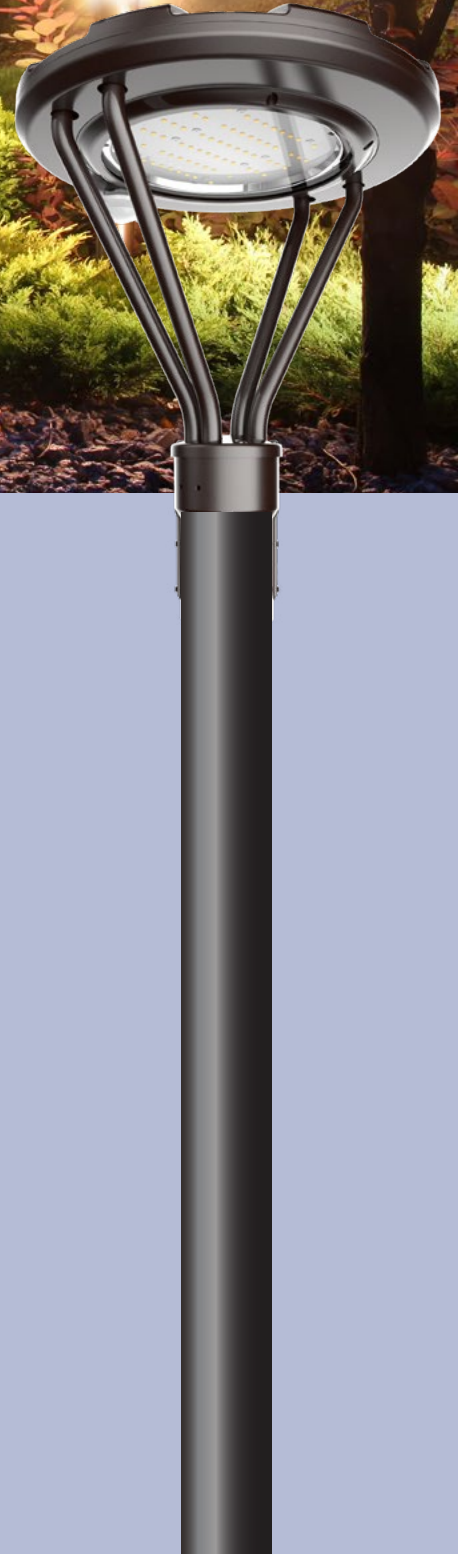


Wall Series



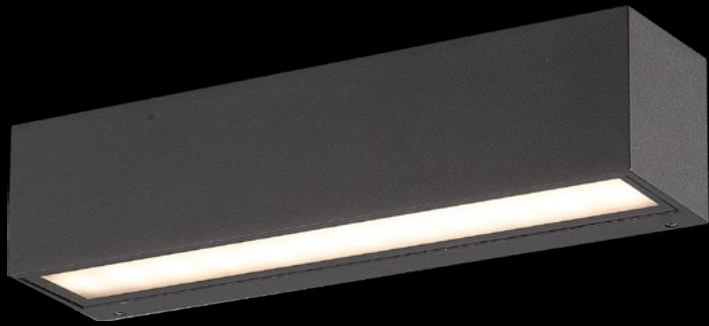

The LED Wall Light

- Die-cast aluminum housing.
- AC LED, without driver.
- Clear glass lens.
- Direct and indirect light
- IP65 for wet locations.

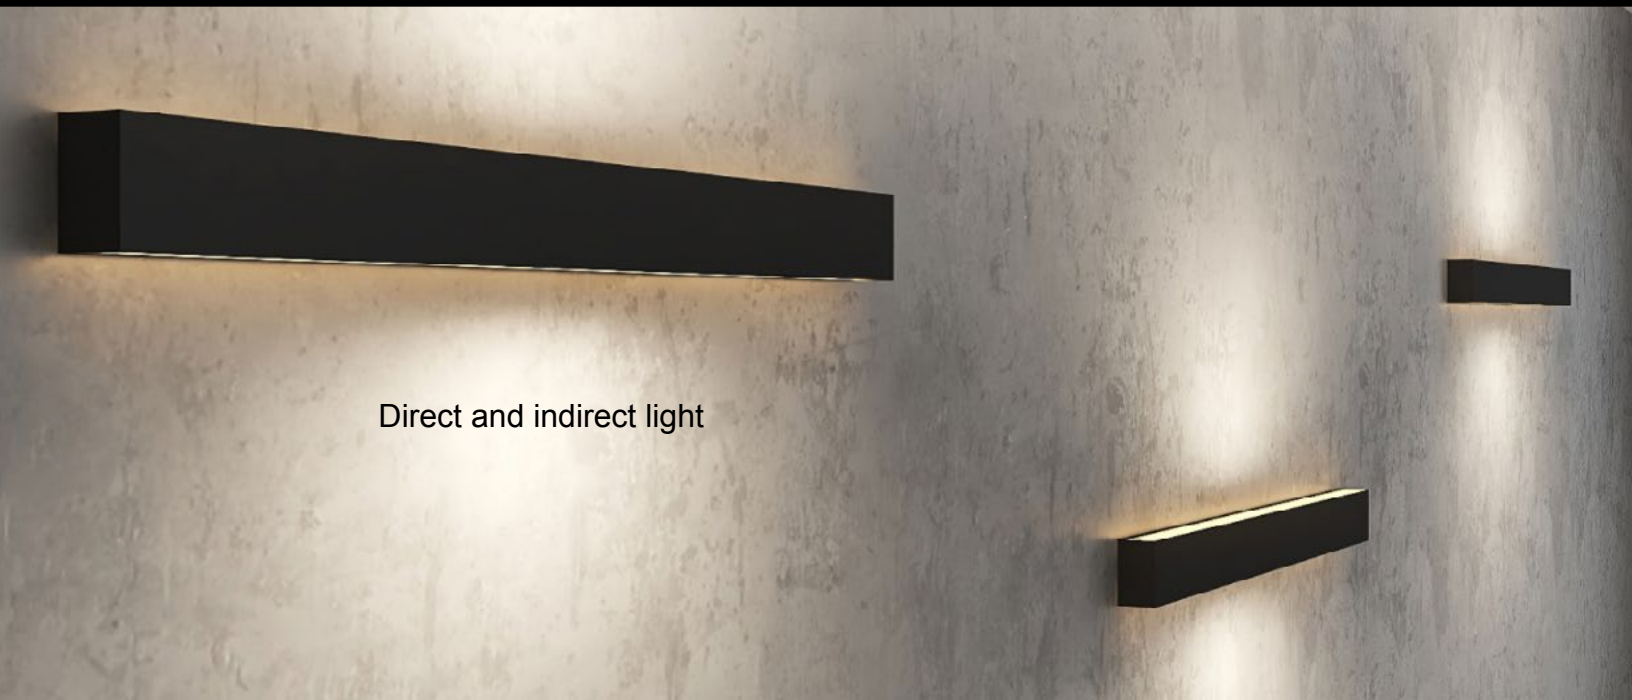

Direct and indirect light



CCT



W



Galene Led Wall Light

- Round and square shapes available
- Direct and indirect light
- 3000K, 4000K and 5000K selectable
- Wattage selectable
- Wide voltage 120-347V





Louver

Solid Rectangular Recessed Step And Wall Light

- Die-cast aluminum housing
- Marine grade treatment available
- Asymmetrical light distribution
- Open and louver faceplate available
- Heavy duty cast aluminum housing and tempered glass lens




Open






Solid Slim Recessed Step And Wall Light

- Die-cast aluminum housing
- Marine grade treatment available
- Asymmetrical light distribution
- Heavy duty cast aluminum housing and tempered glass lens

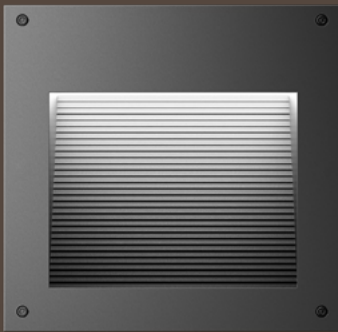


Solid Square Recessed Step And Wall Light

- Die-cast aluminum housing
- Marine grade treatment available
- Asymmetrical light distribution
- Heavy duty cast aluminum housing and tempered glass lens

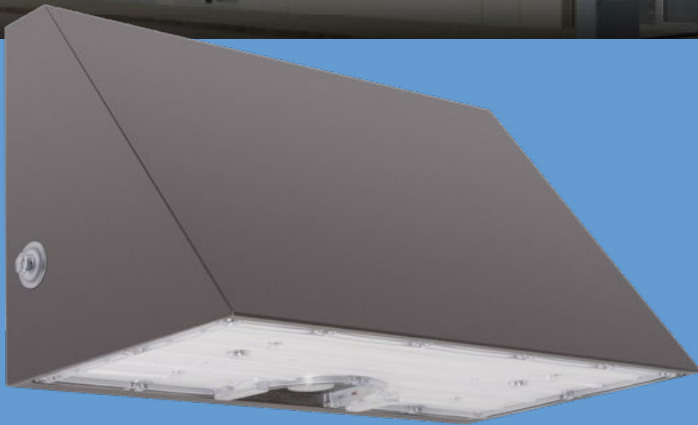

Selectable Dark Sky Wall Pack

- Wattage selectable
- CCT selectable
- Photocontrol comes standard
- Sensor and emergency back-up optional
- Type III, IV, V available

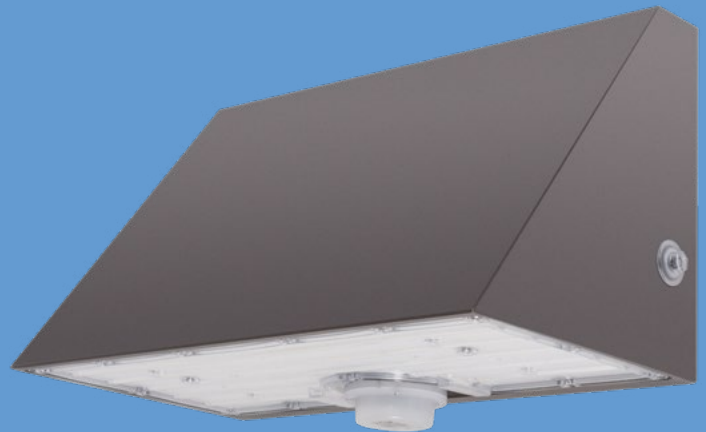


Linear Series






MAGIC LED Linear Light

- Comes in lengths of 2', 4', and 8'
- 3000K, 3500K and 4000K selectable
- Wattage selectable
- Available with several lit joiner accessories for unlimited lighting pattern design
- Surface and pendant mount
- Microwave sensor and EBU are available
- Width 1.8"

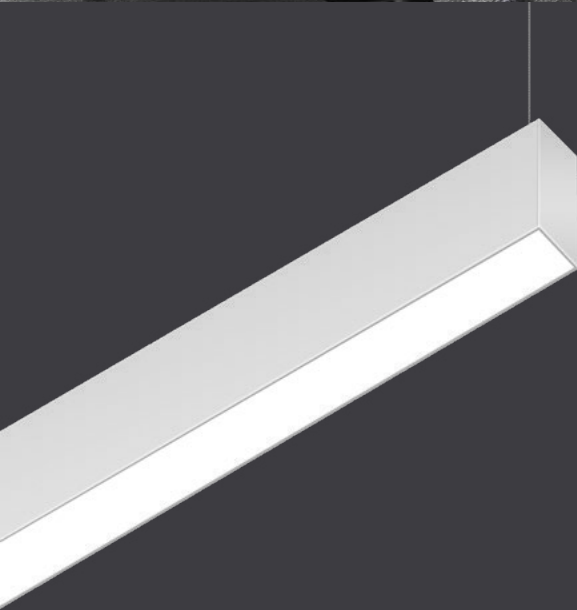

Surface and pendant mount

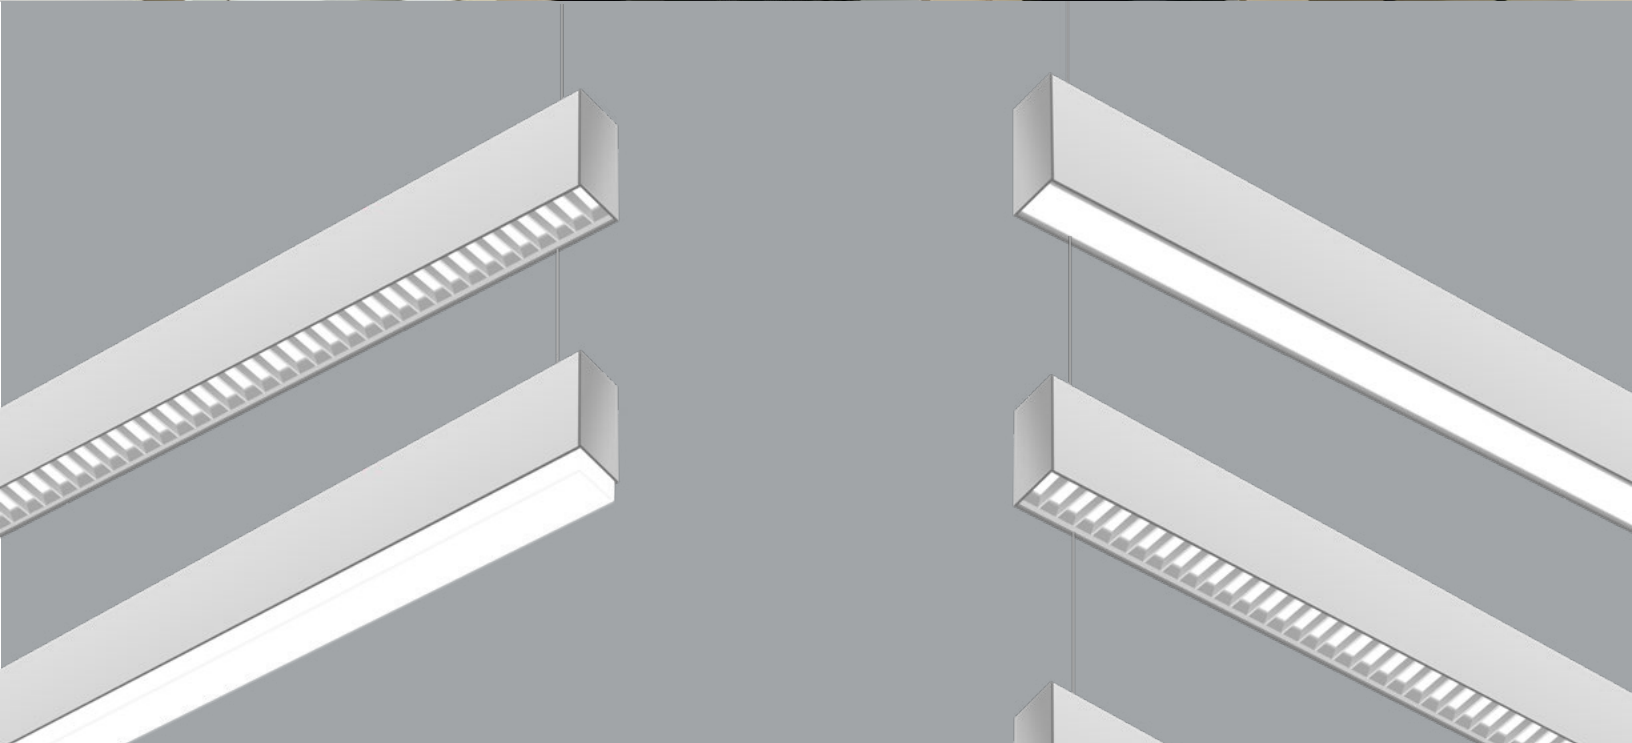

MAGIC LED Linear Light


- Comes in lengths of 2', 4', and 8'
- Direct and indirect available
- Available with several lit joiner accessories for unlimited lighting pattern design
- Professional lenses available in flush diffused, louver, micro reflector and drop lens
- Surface and pendant mount
- Microwave sensor and EBU are available
- Width 1.3"

Professional lenses available in flush diffused, louver, micro reflector and drop lens




MAGIC LED Linear Light

- Comes in lengths of 2', 4', and 8'
- Direct and indirect available
- Available with several lit joiner accessories for unlimited lighting pattern design
- Professional lenses available in flush diffused, louver, micro reflector and regress lens
- Surface, pendant and wall mount, recessed mount
- Microwave sensor and EBU are available
- Width 2.3"

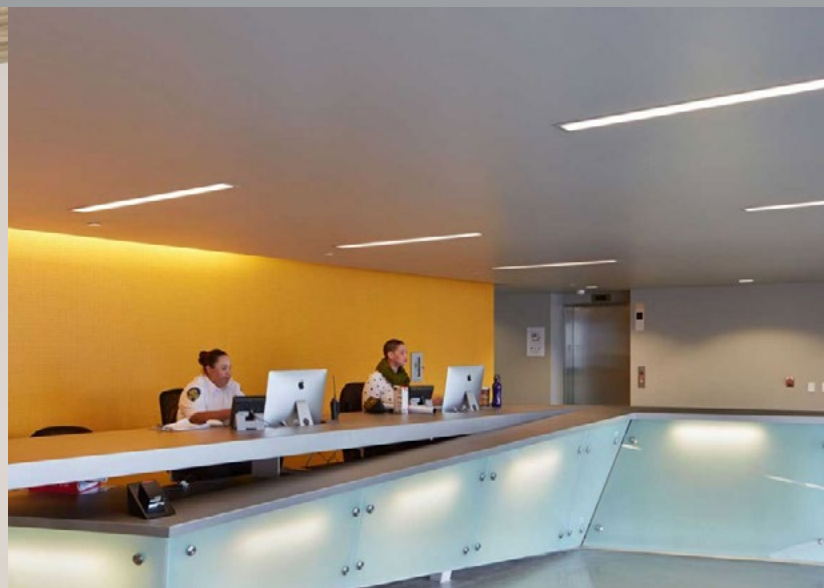



MAGIC LED Linear Light

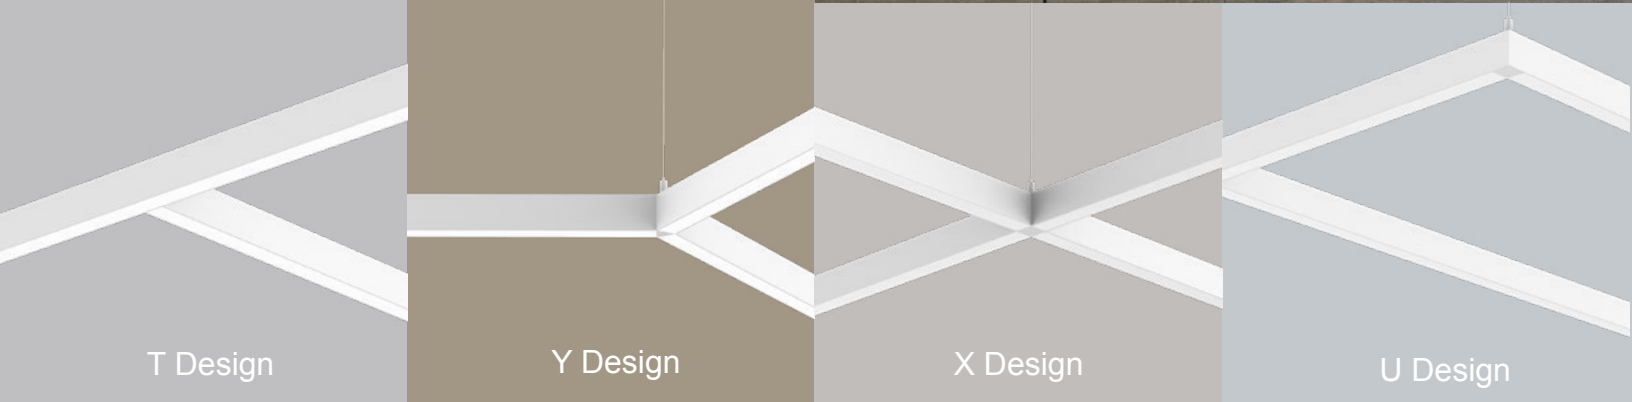


T Design

Y Design

X Design

U Design

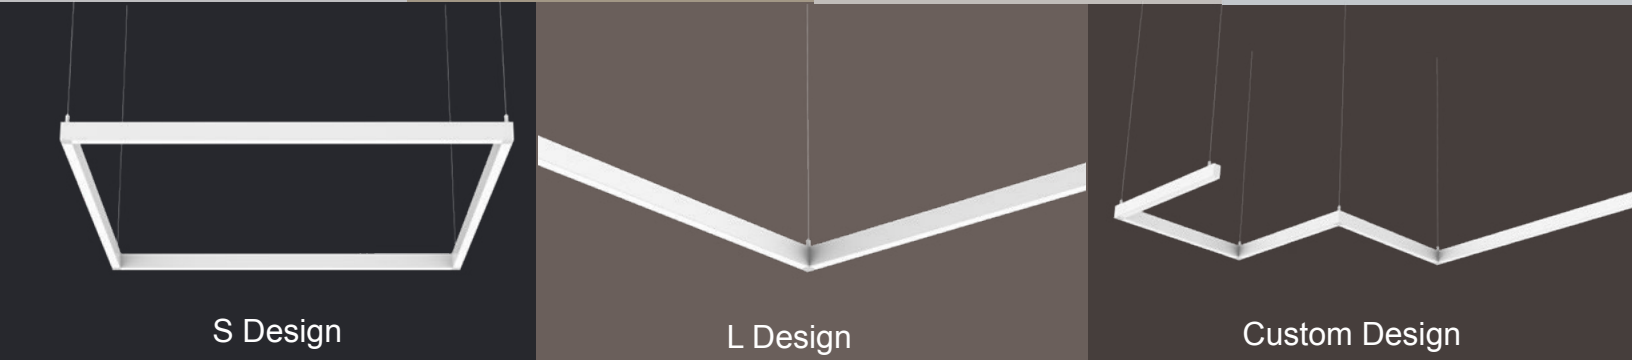

S Design

L Design


Custom Design







Integrate T-grid Linear Light

- Mounting brackets and led module are detachable
- Triple-side unique optic design
- Various standard 15/16" or 9/16" ceiling mount compatible
- Seamless continuous runs
- Flexible lighting patterns achievable
- RJ45 terminals for easy driver connection

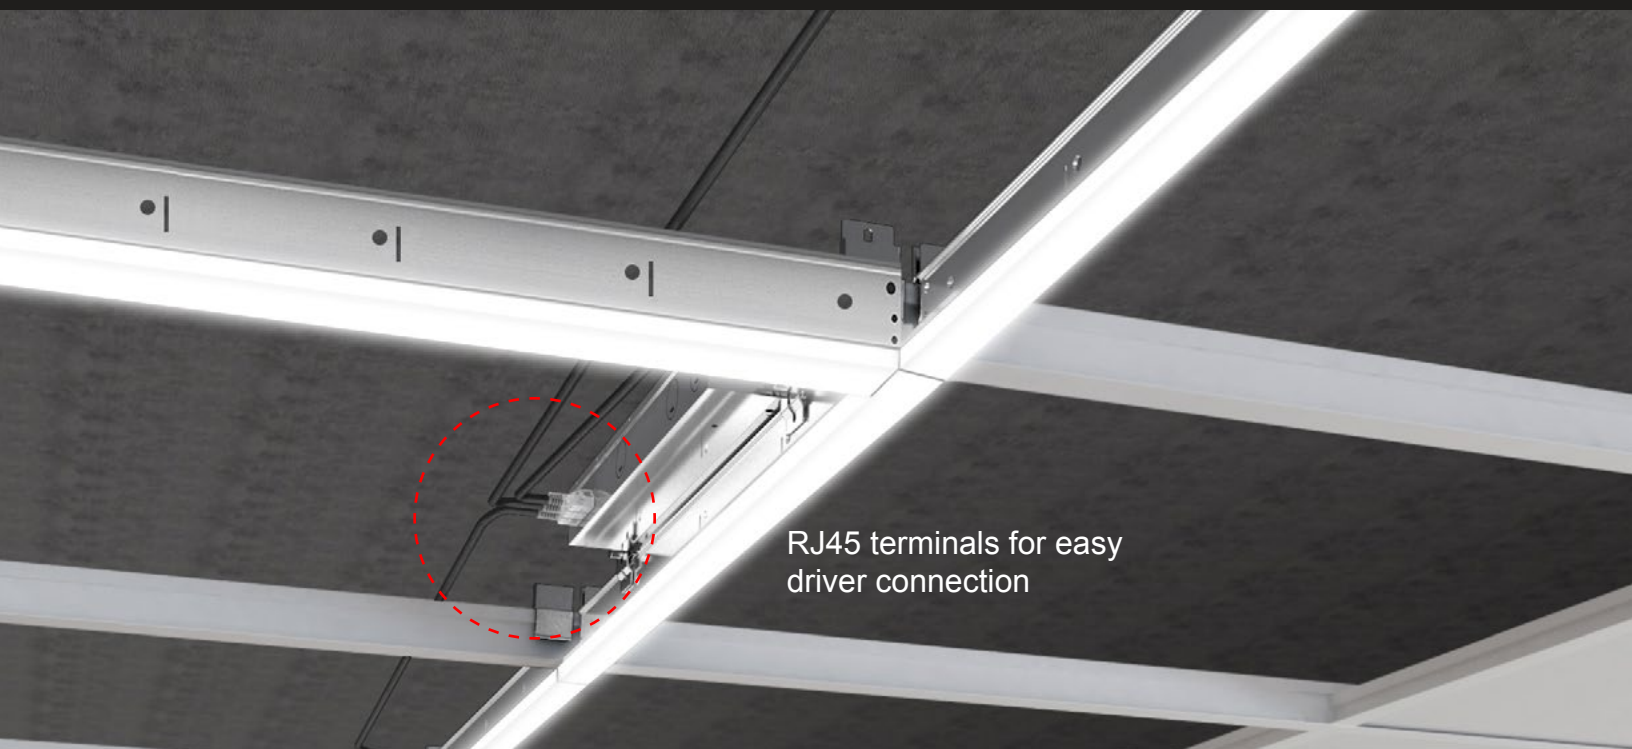

RJ45 terminals for easy driver connection

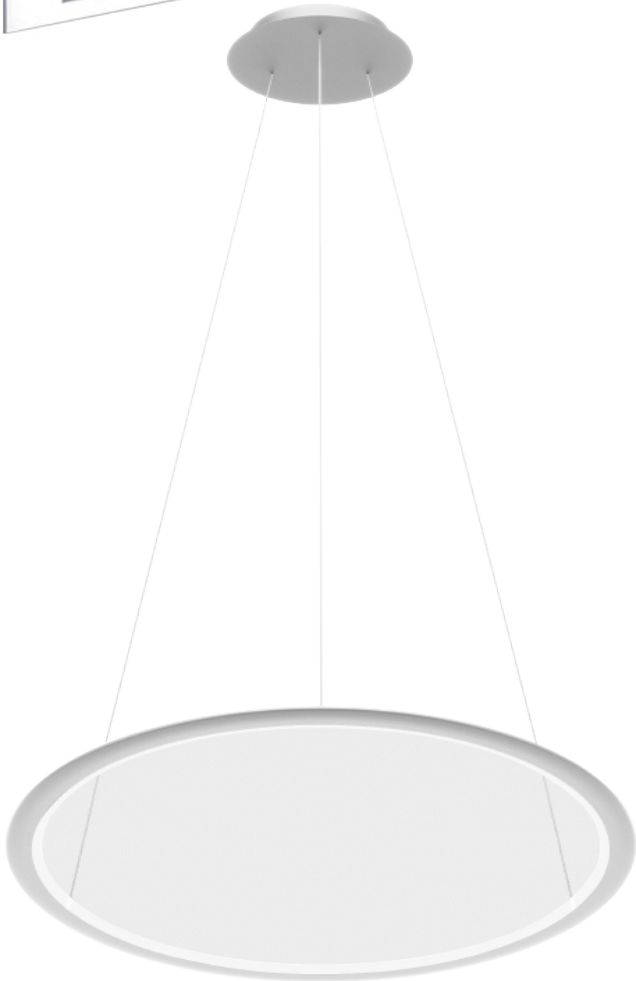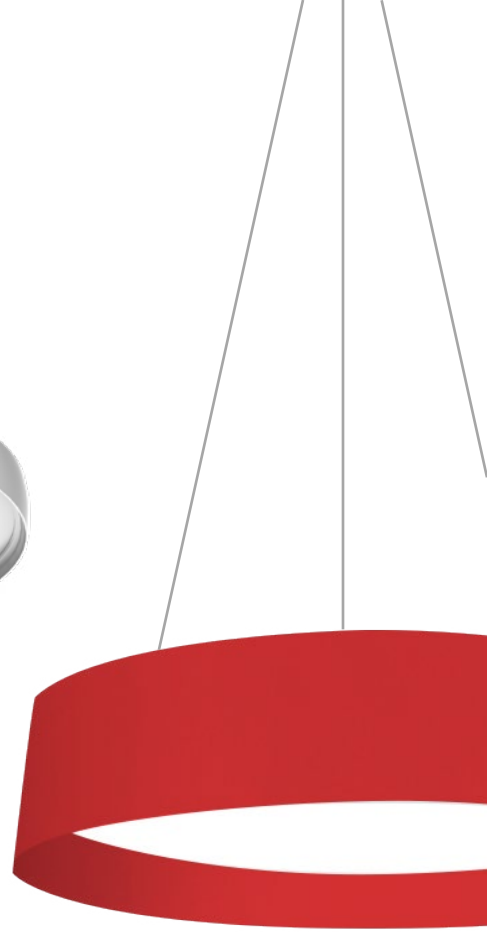


Pendant Series



TRIA Pendant Light

- Geometric triangle forms
- Available in standard light and acoustic w/light
- 4 sizes to choose
- 35 acoustic felt colors available

Color Options

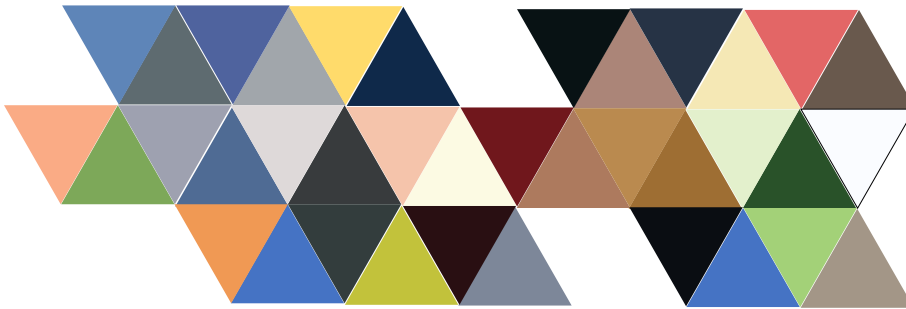



Slim Focus Round Light

- Three fixture diameters available
- Die formed of 0.6mm cold-rolled steel body
- Edge-lit technology and non-yellowing optical PMMA
- Pendant mounted or surface mounted

CCT

Die formed of 0.6mm cold-rolled steel body



Pendant Mounte





Surface Mounte



Selectable Focus Round Light

- Fixtures in diameters from 13.8" through 47.2"
- Recessed light source design achieving perfect glare control
- Edge-lit technology and non-yellowing optical PMMA
- Rod and Aircraft Cable Pendant mounted and surface mounted
- Direct and indirect light distributions
- Integrated driver design reduce the time to recess the driver into junction box
- 3000K, 3500K, 4000K selectable

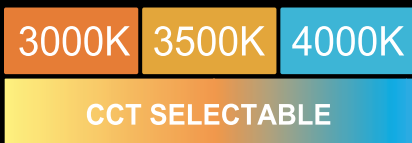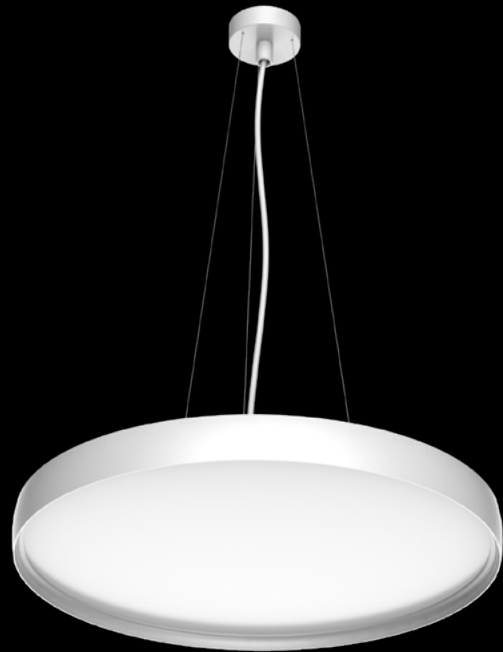



Deep Focus Round Light

- Fixtures in diameters from 11.8" through 23.6"
- Deep recessed light source design
- Pendant or surface mounted
- Direct and indirect lighting for option






Seamless fixture to fixture connection

Canoe Pendant Light

- Aluminum alloy body and die-casting ends
- Honeycomb lens
- Various fabric colors available



Module Design, LEGO concept for different size projects

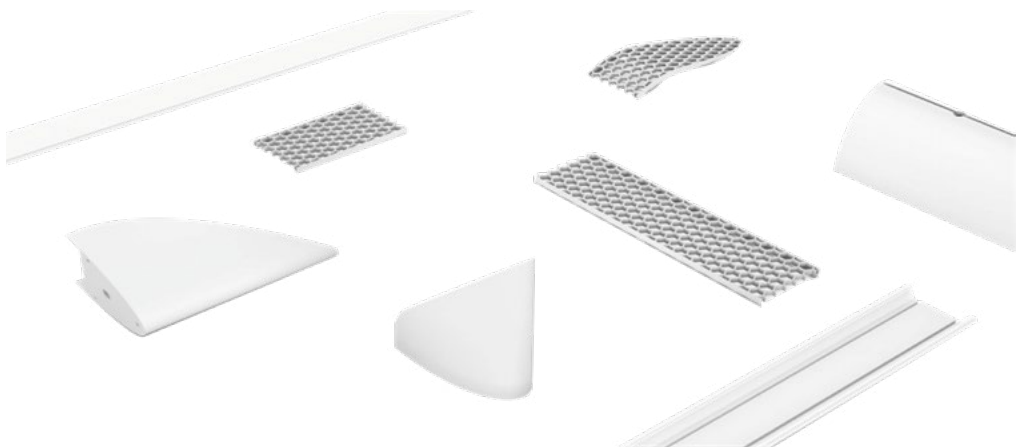



Magnetic Track System

- 26 magnetic Light Fixture styles are interchangeable.
- 17 inch Radius (34 inch diameter) and straight
- Available in 1/8, 1/4, 1/2 inch circle segments.
- 24V (low voltage) requires external driver.






Ring Series



(VRD) Vicky Ring Downward Light

- Fixtures in diameters from 23.6" through 196.9"
- Available in standard light and acoustic w/light.
- Direct illuminating
- 35 acoustic felt colors available

Color Options

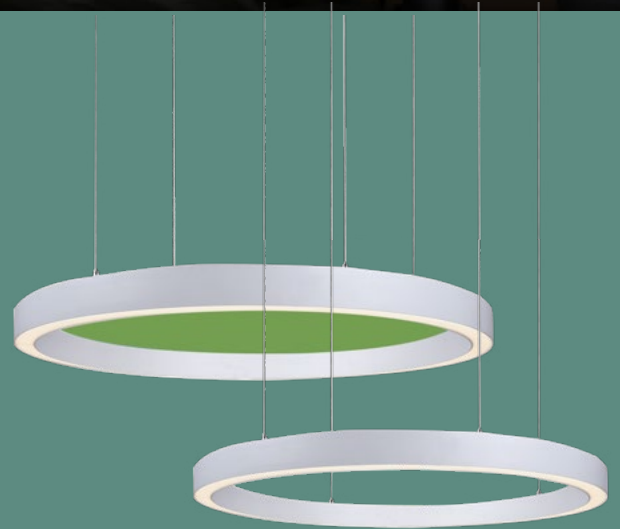



(VRUD) Vicky Ring Up & Downward Light

- Fixtures in diameters from 23.6" through 196.9"
- Direct and indirect illuminating






(VRO) Vicky Ring Outward Light & Acoustic Light

- Fixtures in diameters from 23.6" through 59.1"
- Available in standard light and acoustic w/light
- Illuminating from the outer surface
- Pendant and surface mounted

Color Options

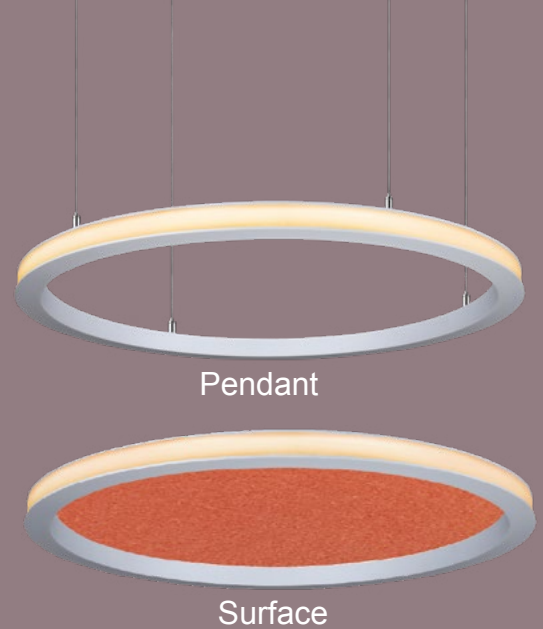




(VRI) Vicky Ring Inward Light & Acoustic Light


- Fixtures in diameters from 23.6" through 59.1"
- Available in standard light and acoustic w/light
- Illuminating from the outer surface
- Pendant and surface mounted
- 35 acoustic felt colors available

Color Options

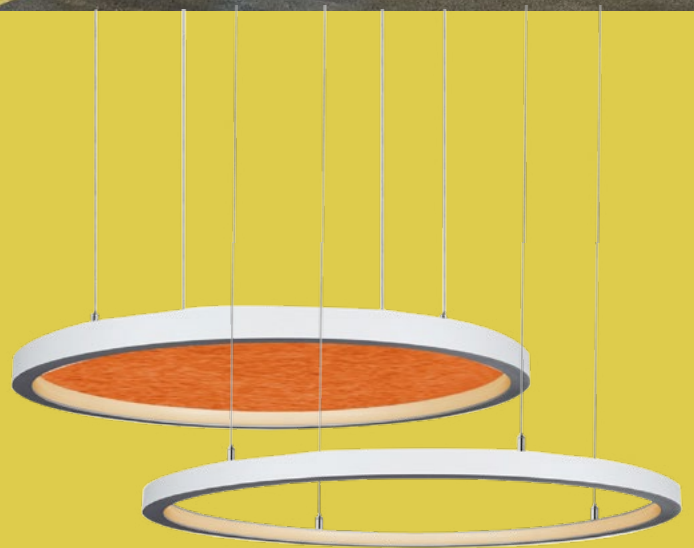




Ceiling Series

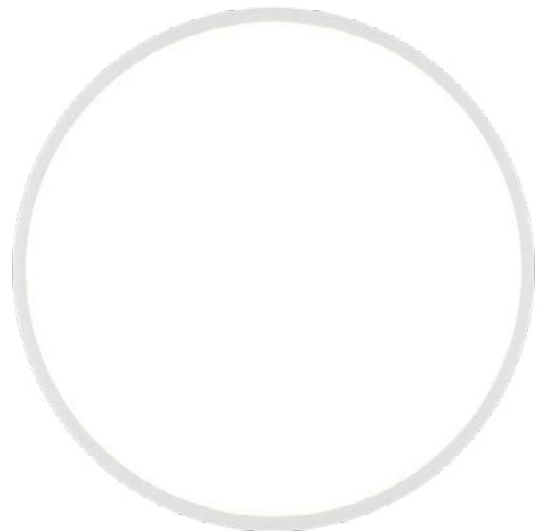



Magic Cylinder Light

- Tool-less modular design
- Monopoint pendant , surface and track mounted
- Interchangeable Beam Spread:15°/24°/38°/60°
- Anti-glare design to reduce glare light
- Triac dimmable, compatible with both by MLV or ELV dimmer
- Integral driver, isolated circuit
- Cree LED chips, CRI90

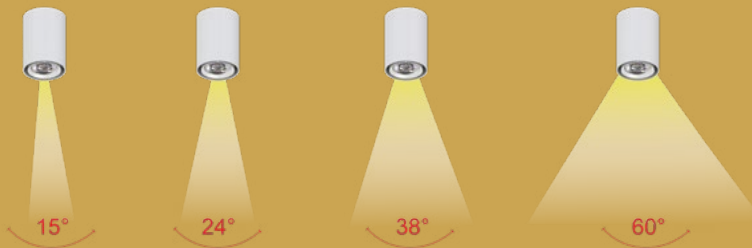

BeamSpread:15°/24°/38°/60°



H-type Single Circuit J-type Single Circuit L-type Single Circuit



Focus Round Light

- Fixtures in diameters from 13.8" through 47.2"
- Recessed light source design achieving perfect glare control
- Edge-lit technology and non-yellowing optical PMMA
- Rod and Aircraft Cable Pendant mounted and surface mounted
- Direct and indirect light distributions
- Integrated driver design reduce the time to recess the driver into junction box



Downlight Illumination

Recessed light source design achieving perfect glare control. Edge-lit technology and non-yellowing microprismatic optical PMMA.

Uplight & Downlight


Flexible installations come in pendant, surface and wall mounted. Direct and indirect light distributions.





Heavenly Linear High Bay

- Robust Fixture.
- Superior Fit and Finish.
- Standard, narrow or wide distribution.
- Multiple mounting options.



Polycarbonate Frosted Lens




Acrylic Frosted Lens




Acrylic Clear Lens




EBU

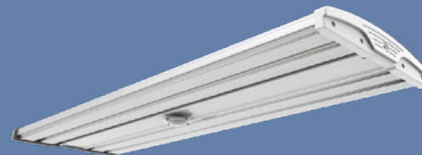


Motion Sensor

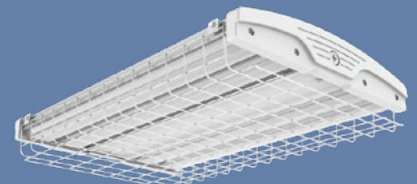


Wire Guard

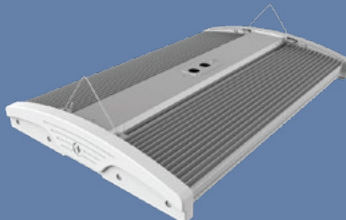

V Hook

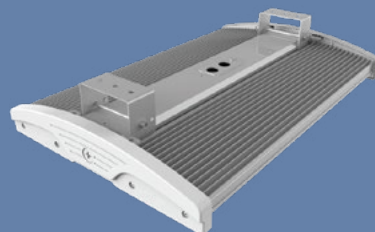

Channel

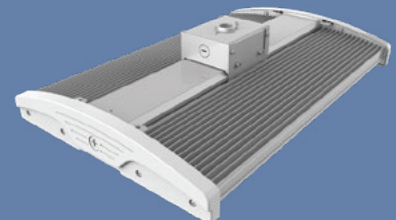

Pendant



1135 Thomas Busch Highway,

Pennsauken, NJ 08110

866-222-8866

info@aboveallighting.com

©2023 ABOVE ALL all rights reserved