



ABOVE ALL

www.AboveAllLighting.com


Step And Wall Light Series



Solid Square Recessed Step And Wall Light

PERFORMANCE

- Input Watts: 8W
- Output Lumens @3000K: 167lm
- Input voltage: 120V-277
- 50/60Hz
- CCT: 3000K, 4000K
- CRI: 80
- Not dimming is standard, 0-10V Dimming optional
- Power Factor:>0.9
- Working Temperature: -4-104°F (-20-40°C)

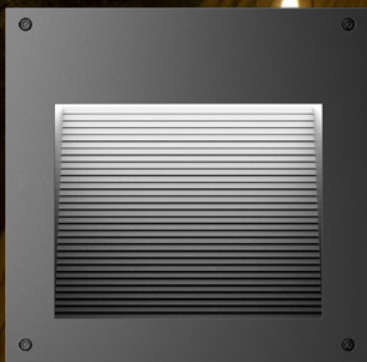

SOLID RECTANGULAR RECESSED STEP AND WALL LIGHT- Louver



PERFORMANCE


- Input Watts: 7.5W, 6W, 7W, 9W, 20W
- Output Lumens @3000K: 15lm, 25lm, 74lm, 31lm, 73lm
- Input voltage: 120V-277
- 50/60Hz
- CCT: 3000K, 4000K
- CRI: 80
- Not dimming is standard, 0-10V Dimming optional
- Power Factor: >0.9
- Working Temperature: -4-104°F (-20-40°C)



SOLID RECTANGULAR RECESSED STEP AND WALL LIGHT- Open

PERFORMANCE


- Input Watts: 5W, 6W, 8W, 10W, 20W
- Output Lumens @3000K : 94lm, 110lm, 132lm, 136lm, 344lm
- Input voltage: 120V-277
- 50/60Hz
- CCT: 3000K, 4000K
- CRI: 80
- Not dimming is standard, 0-10V Dimming optional
- Power Factor:>0.9
- Working Temperature: -4-104°F (-20-40°C)





Solid Slim Recessed Step And Wall Light

Compact and inconspicuous design with asymmetrical light distribution, directing light downward, minimizing uplight while revealing the texture of the stepped baffle. Die-cast aluminum housing, silicone rubber gasket, tempered glass, akzoNobel powder coating. Ideal for the illumination of ground surfaces, building entrances, stairs and footpaths.




PERFORMANCE

- Input Watts: 12W
- Output Lumens @3000K : 460lm
- Input voltage: 120V-277
- 50/60Hz
- CCT: 3000K, 4000K
- CRI: 80
- Not dimming is standard, 0-10V Dimming optional
- Power Factor:>0.9
- Working Temperature: -4-104°F (-20-40°C)



ABOVE ALL Lighting, Inc.

 1135 Thomas Busch Highway,
Pennsauken, NJ 08110

 866-222-8866

 info@abovealllighting.com

 www.AboveAllLighting.com