



VAGARY PENDANT LIGHT



PRODUCT DESCRIPTION

The Vagary pendant lights exceptionally minimalist design incorporates our ultra-thin, semi-transparent vertical optics. Optional seamless row mounting for continuous light. It is perfect for applications that include conference rooms, open offices, retail settings, anywhere you desire an elegant statement piece.

FEATURES

- Sleek and elegant minimalist Design
- Transparent optic and edge-lit
- Integral driver, isolated circuit
- Seamless continuous row mount
- CCT selectable



ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Operating temperature range: -4-104°F (-20-40°C)
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

SPECIFICATION

Net Weight: 11 lbs / 5 kg

Max Pendant Cable Length: 3.9ft (1300mm)

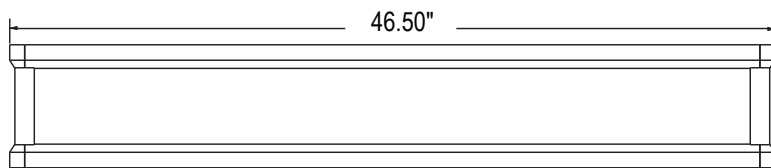

PERFORMANCE

CRI

80

CCT

3000K, 3500K, 4000K

Dimming

1-10V Dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature


-4-104°F (-20-40°C)

Certifications

- cULus conforms to UL Std. 1598Cert. to CSA Std. C22.2 No.250.0
- Suitable for dry locations
- RoHS compliant

Ordering Information

Example: VAGA12-SW1-PM-D-FDL



1. Series

VAGA

2. Size

12 - 4FT

3. Driver

Blank - Integral

4. CCT

SW - 3000K / 3500K / 4000K Selectable

5. Voltage

1 - 120-277V

6. Mounting Options

PM - Pendant*

* Aircraft Cable pendant mount kits include dry ceiling and drop ceiling and they need to be bought separately. Please refer to the following accessory table to choose the right pendant mounting kits.

7. Light Distribution

D - Direct

ID - Indirect

* Direct distribution is standard.

8. Lens Options

FDL - Flush Diffused Lens¹

LVL - Louver Lens²

1. Flush Diffused Lens is standard.

2. Louver lens is only available for direct distribution.

9. Finish


Blank - Silver

* Silver finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.


PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Flush Diffused Lens



Louver Lens

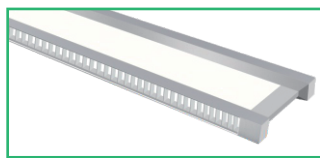

	Flush Diffused Lens	Louver Lens
Lengths	4FT	4FT
Wattage	40W	40W
Voltage	120-277V (Int.Driver)	120-277V (Int.Driver)
Efficacy	105lm/w @ 3500K	90lm/w @ 3500K
Lumen Output	4200lm @ 3500K	3600lm @ 3500K

Accessories (ordered separately and field installed)



90544

MAG-PMK1

Aircraft Cable
Pendant Mount Kit
for Dry Ceiling



90719

MAG-PMK3

Aircraft Cable
Pendant Mount Kit
for Drop Ceiling

* Max Pendant Cable Length: 3.9ft (1300mm)


- **Seamless Continuous Row Mount**

Each power feed connections up to 40ft




- **CCT Selectable**

3000K / 3500K / 4000K Selectable

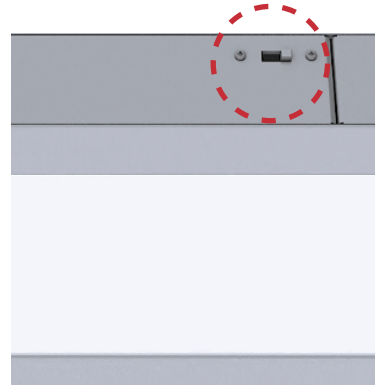

- **Visual Comfort**


Diffused flat lens and Louver lens

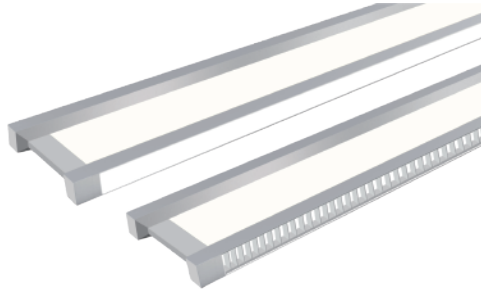

Ref#: 20230906


PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

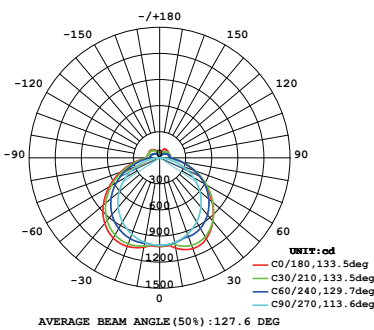

Direct

13% uplight / 87% downlight

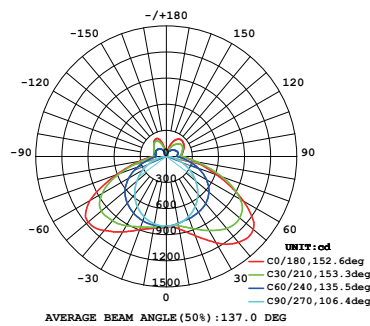

Indirect

17% uplight / 83% downlight

Warranty

Five year limited warranty. Full warranty terms located at www.abovealllighting.com/warrantystatements.

Specifications subject to change without notice.