


**SAFETY INSTRUCTION**

**READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.**

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

**MAKE CERTAIN POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.**


**CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER. USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.**

**MAINTENANCE CAUTION**


1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance must be done by professionals.

**WIRE CONNECTION**

Universal Voltage permits operation at 120VAC thru 277VAC, 50 or 60 Hz.

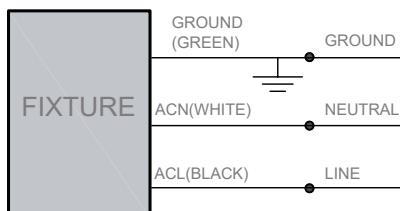

Make the following Electrical Connection:

- a). Connect the voltage supply line to ACL in Black.
- b). Connect the voltage supply Neutral to ACN in White.
- c). Connect Green ground lead to the supply ground lead.

**INSTALLATION**
**ACCESSORY PACK**


WIRE NUT x 3

**WARNING**
**Risk of injury or damage. Make certain power is OFF before installing or maintaining fixture.**

Ref#: 20251105

**Installation Steps**

1. Take out fixture and reflector from package.
2. Remove the screws, washers, spring washers, and covers from the top of the two brackets of the light fixture.  
Align the two mounting holes on the reflector and secure the bracket and reflector with these removed screws, washers, spring washers, and covers.
3. Make the wiring connections with waterproof connectors (by others) based on the wiring diagram.
4. Slip the fixture over a tenon or pole with diameter of 2 3/8" or 3" then tighten 6 set screws.
5. Before tightening screws B (2) please adjust the reflector into a desired direction.

