



## MIKI LED BOLLARD



## PRODUCT DESCRIPTION

The MIKI led bollard has UV powder coated die cast high quality aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.


## FEATURE

- Shielded 180° light distribution
- Die cast aluminum body
- Tempered safety glass
- IP65 rated for wet location

## ELECTRICAL SYSTEM

- Input Voltage: 120-277V
- 50/60Hz
- Minimum Ambient -86°F, maximum ambient 104°F
- Power Factor: > 0.9 @120Vac
- Total Harmonic Distortion: < 20%

## DIMENSION

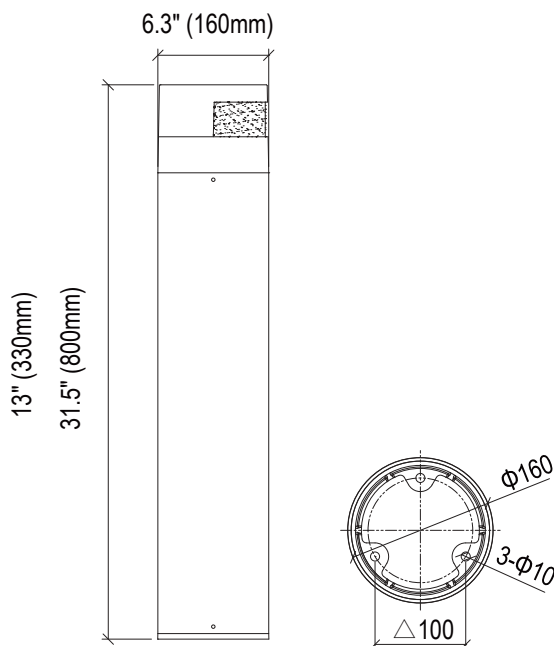

## PERFORMANCE

CRI

80

CCT

3000K, 4000K

Dimming

Not dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-30°C to + 40°C (-86°F to 104°F)

Certifications

- cETL listed
- Suitable for wet location
- IP65 rated
- RoHS compliant

## Ordering Information

Example: MIBD32H-10401-III-BK

| Name                   | Height   | Watts    | CCT                      | Voltage      | Controls     | Distribution   | Finish     |
|------------------------|--|----------|--------------------------|--------------|--------------|----------------|------------|
| MIBD - MIKI<br>Bollard | 13H - 13" High <sup>1</sup><br>32H - 31.5" High <sup>1</sup> | 10 - 10W | 30 - 3000K<br>40 - 4000K | 1 - 120-277V | Blank - None | III - Type III | BK - Black |

### Notes:

1. 32H is standard. 13H may ask MOQ and long lead time. Please contact Customer Service for details.

\* Standard Finish is black. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

## ACCESSORIES (ORDER SEPARATELY)




**91305**

ABMK-MIBD

Anchor bolts mounting kits for Miki Bollard

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.



## PERFORMANCE DATA

### LUMEN OUTPUT

| Watts | Lumen Output | AC Input 120V | CRI | CCT   |
|-------|--------------|---------------|-----|-------|
| 10W   | 550lm        | 0.08A         | 80  | 4000K |

## Warranty

Five year limited warranty.