

SUITABLE FOR MODEL



IMAGE MAY VARY FROM ACTUAL PRODUCT

SAFETY INSTRUCTION

READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. MAKE CERTAIN POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.

CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER. USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.


Maintenance Caution

1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance must be done by professionals.

WIRE CONNECTION

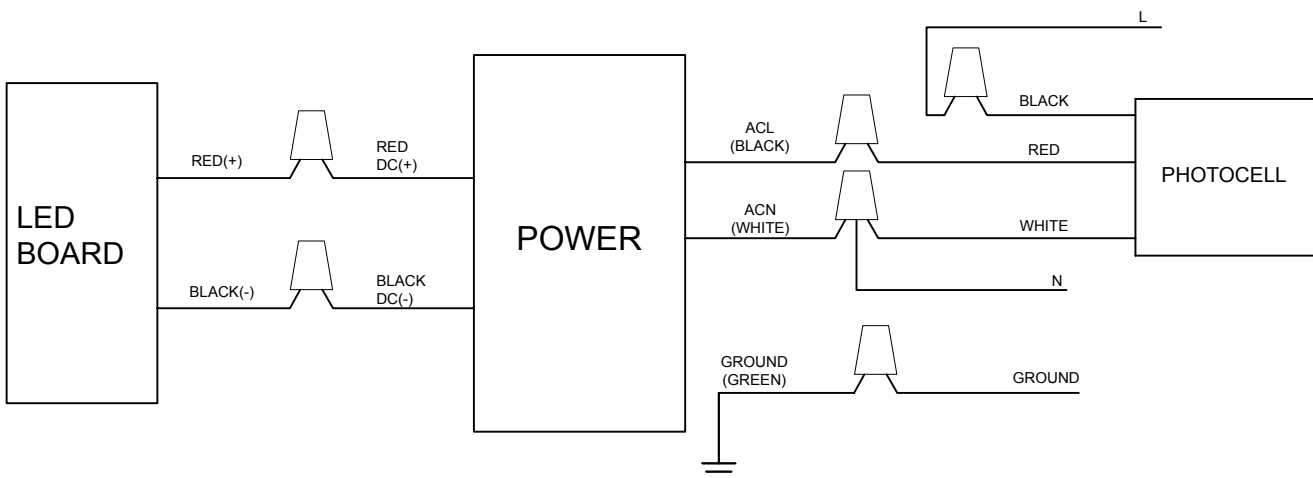

INSTALLATION

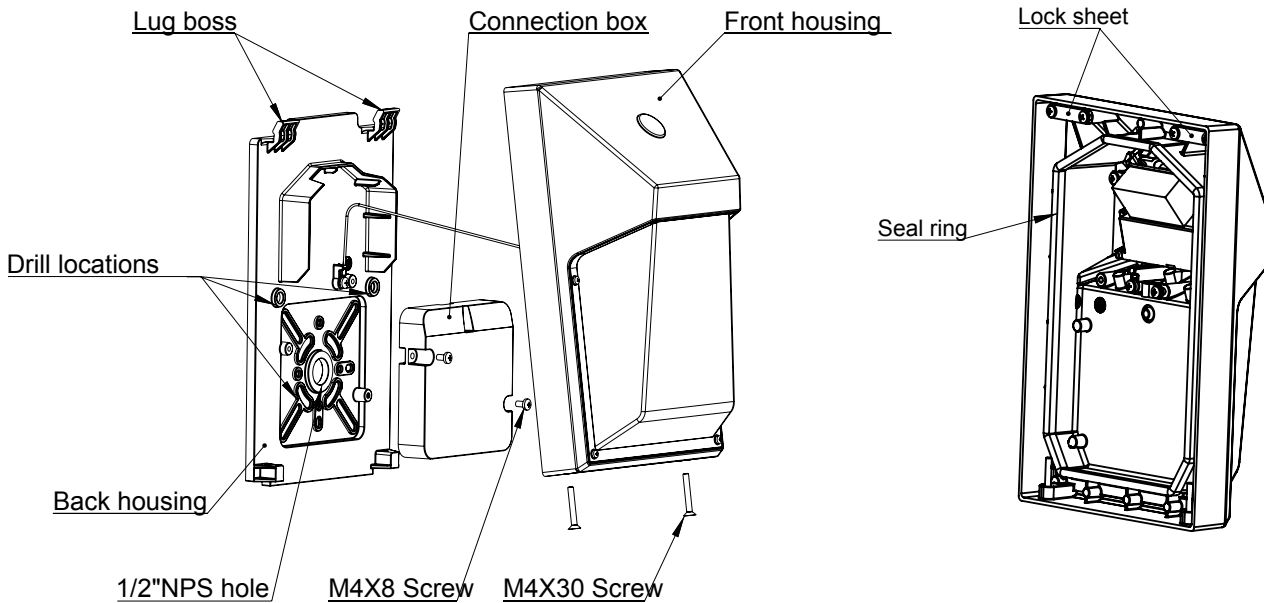

1. Remove two M4X30 screws by the hexagon wrench, and remove the front housing.
2. Remove two M4X8 screws and connection box.
3. Attach the back housing to the wall according to the drill locations.
4. Pass the AC input wire through the hole of 1/2" NPS to back housing.
5. Using the P3 connection bolt (in attached pocket) connect the wires according to the wire connection diagram.
6. Dress the AC input wires by the connection box so they do not interfere with the assembly of the front main housing.
7. Put the lock sheet on front housing to the lug boss (please ensure the place of seal ring), and use the hexagon wrench to tighten two M4X30 screws for covering the front housing.