



IMAGE MAY VARY FROM ACTUAL PRODUCT

LED Security Light




PRODUCT DESCRIPTION

LED Security Light is the ideal for security entrance, stairways, and storage area. Integral Photocell is preinstalled for more efficient operation and energy savings. Available in 120V only.

SPECIFICATION

Length: 10.9"
 Width: 6.8"
 Height: 5.2"
 Max. Weight: 3.39 lbs

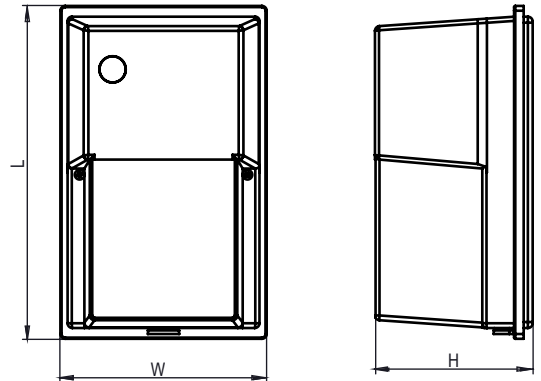

Ordering Information

Example: ABBSEC14504

ABOVE ALL	Security Light	Watts	CCT	Voltage
ABB	SEC	14 - 14 Watts	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	4 - 120V

Notice:

* Standard Finish as Dark Bronze. Special Order as other finish color - Please Ask Customer Service for Details.

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	AC Input 120V	Measured Watts	CRI	CCT	LPW
13W	1296	0.13A	11.38W	>70	2972K	113.8

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -40-104°F (-40-40°C)

Ambient		Multiplier
Celsius	Fahrenheit	
0	32	1.02
10	50	1.01
20	68	1.00
25	77	1.00
30	86	1.00
40	104	0.99


Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the LED Security Light in a 77°F ambient, (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Operating Hours	0	4,000	7,000	30,000	175,000
Lumen Maintenance Factor	1.0	0.98(L98)	0.96(L96)	0.92(L92)	0.70(L70)

Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

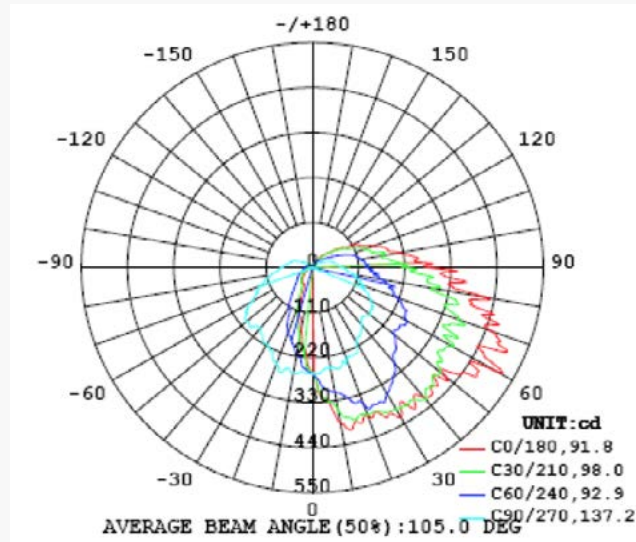

PRODUCT SPECIFICATIONS

CONSTRUCTION & MATERIALS

- Housing is all aluminum construction
- Terminal block for power input suitable for 2 - 10 AWG wire
- Luminaire sides are rugged die cast aluminum with integral, weathertight LED driver compartments and high performance heat sinks

System Wattage	Max THD (%)	Power Factor	Power Efficiency	Replaces/ Equiv.(MH)
13W	20	>0.98	90%	70W

Ref#: 10488-10810

ELECTRICAL SYSTEM

- Input Voltage: 120V
- 50/60Hz
- Class 2 driver
- Minimum Ambient -40°C
- Power Factor: > 0.98 at full load
- Total Harmonic Distortion: < 20% at full load

CERTIFICATIONS AND QUALIFICATIONS

- cETLus Listed
- Suitable for wet location
- IP65 rated
- DLC qualified. Please refer to <http://www.designlights.org/QPL> for most current information
- RoHS compliant

BUG RATING

Model	BUG Rating
ABBSEC14504	B0-U3-G2

Warranty

Five year limited warranty. Full warranty terms located at www.abovealllighting.com/warrantystatements

Note: Specifications subject to change without notice.