

# LED STD WRAP




## PRODUCT DESCRIPTION


ABOVE ALL lighting's LED wrap have a traditional design with diffuser lens.  
 DLC premium with Philips led driver with high quality and performance.  
 Optional accessories include wire guards, and motion sensors.

## SPECIFICATION

**2FT**  
 Length: 25.01"  
 Width: 5.12"  
 Height: 3.03"  
 Max. Weight: 3.7lbs

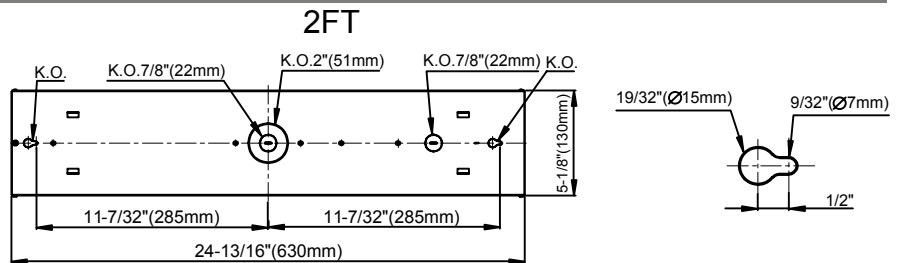

**4FT**  
 Length: 48.11"  
 Width: 5.12"  
 Height: 3.03"  
 Max. Weight: 6.6 lbs

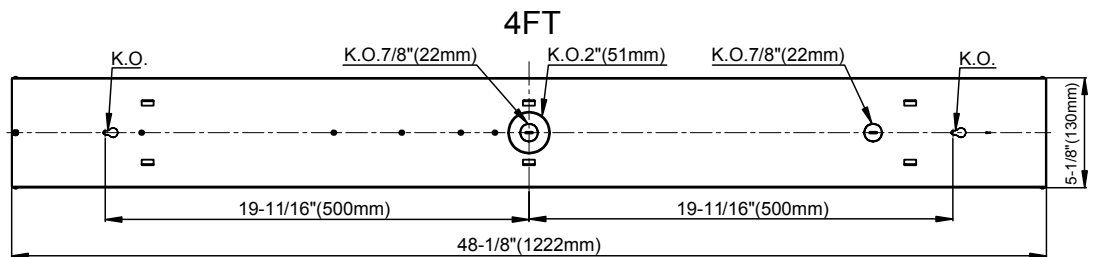

### Ordering Information

**Example: WRP06D28LED301S**

Wrap Fixture	Dimension	Dimmable	Watts	LED	CCT	Voltage	Series	Controls
WRP	06 - 2FT	D - 0-10V dimmable	28 - 28 Watts	LED	30 - 3000K	1 - 120-277V	S - STD series	Blank - None
	12 - 4FT		38 - 38 Watts		35 - 3500K			MSW - Microwave Dimming Sensor <sup>1</sup>
			40 - 4000K					
			50 - 5000K					

Notice:

1. Microwave dimming sensor dims to 10%, for mounting height 49ft (15m) max. It is for option.

Please contact customer service in advance.

\* Special Order- Ask Customer Service for Details

## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -4-104°F (-20-40°C)

Watts	Lumen Output	Measured Watts	CRI	AC Input 120V	CCT	LPW
28W	3640lm	30W	80	0.25A	5000K	130
38W	4940lm	38W	80	0.37A	5000K	130

Ambient		Multiplier
Celsius	Fahrenheit	
0	32	1.02
10	50	1.01
20	68	1.00
25	77	1.00
30	86	1.00
40	104	0.99



### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the LED Wrap fixture in a 77°F ambient, (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Operating Hours	0	5,000	10,000	32,000	32,000
Lumen Maintenance Factor	1.0	0.98(L98)	0.96(L96)	0.92(L92)	0.92(L92)

### Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

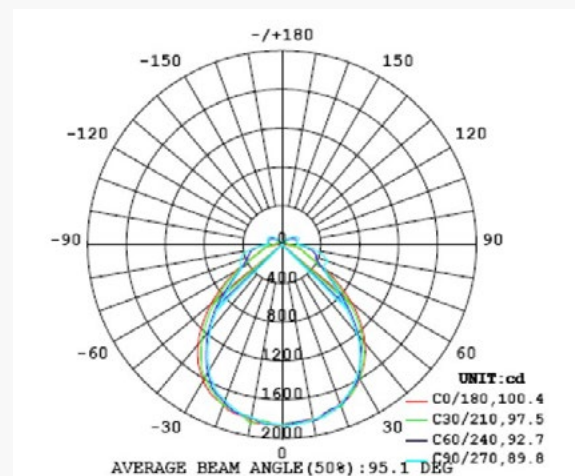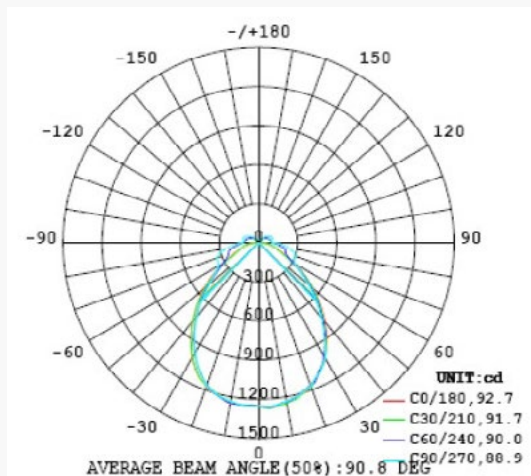

## PRODUCT SPECIFICATIONS

### CONSTRUCTION & MATERIALS

- Input Voltage: 120-277V 50/60Hz
- Class 2 driver
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

System Wattage	Max THD (%)	Power Factor	Power Efficiency	Replaces/ Equiv.(FL)
28W	<15	>0.9	87%	2 Lamp - 17W T8
38W	<15	>0.9	90%	2 Lamp - 32W T8

Ref#:11371-11102

### Warranty

Five year limited warranty. Full warranty terms located at [www.abovealllighting.com/warrantystatements/](http://www.abovealllighting.com/warrantystatements/)

**Note:** Specifications subject to change without notice.