



TAAP CLASSIC LED WALL PACK



PRODUCT DESCRIPTION

The TAAP series Classic LED Wall Pack offers a traditional appearance and is powered by advanced LEDs, featured by wattage and CCT selectable. The Selectable Classic LED Wall Pack is powerful yet energy efficient, with lumen output from 6000lm to 16,000lm, capable of replacing a 400W metal halide luminaire easily.

PERFORMANCE

CRI

70

CCT

3000K、4000K、5000K

Dimming

0-10V Dimming Standard

Projected Lifetime

L70 -50,000 Hours

Working Temperature

-40-104°F (-40-40°C)

Certifications

- cETLus
- Suitable for wet locations
- RoHS compliant
- Sale in US only

FEATURES


- Wattage selectable
- 3000K, 4000K and 5000K selectable
- Lumen output range from 6000lm to 16,000lm
- Tempered glass lens

ELECTRICAL SYSTEM

- Input voltage: 120-277V, 50/60Hz
- Power Factor: >0.9
- Total Harmonic Distortion: <20% at full load
- Working Temperature: -40~40°C (-40~104°F)

SPECIFICATION

LxWxH: 14 1/8" x 9 1/4" x 6 7/8"

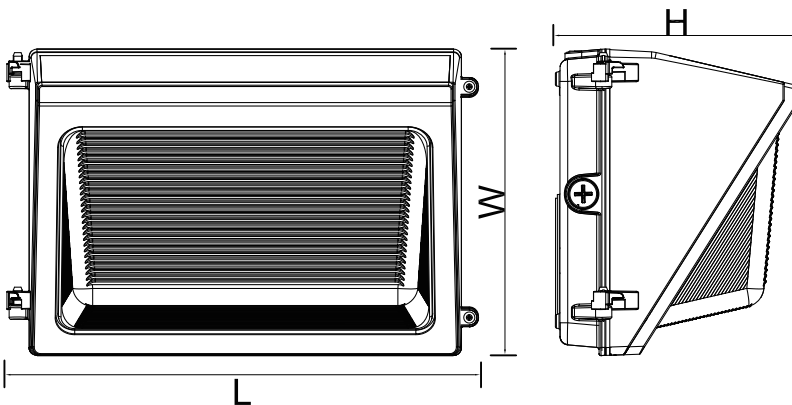

Ordering Information

Example: CWPT-75SP-SW1

Name	- Watts	- CCT	Voltage	- Control	- Finish
CWPT	75SP - Selectable Power 45W/60W/75W ¹	SW - Selectable White 3000K/4000K/5000K ²	1-120-277V	Blank - None PC - Button Photocontrol	Blank - Bronze
	120SP - Selectable Power /80W/100W/120W ¹				


Notice:

- 75W and 120W are default setting, If need other wattage, please contact Customer Service in advance to change the setting in factory or change the setting in the field
- 4000K is default setting. If need other CCT please contact Customer Service in advance to change the setting in factory or change the setting in the field.

* Standard Finish is Bronze. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.


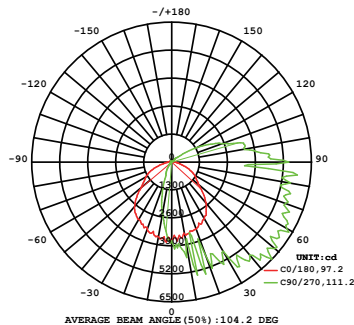


PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Power(W)	45W	60W	75W	80W	100W	120W
Lumen	6075lm	8100lm	10000lm	10800lm	13500lm	16200lm
CCT	5000K					
Efficacy	135m/W					
CRI	70					

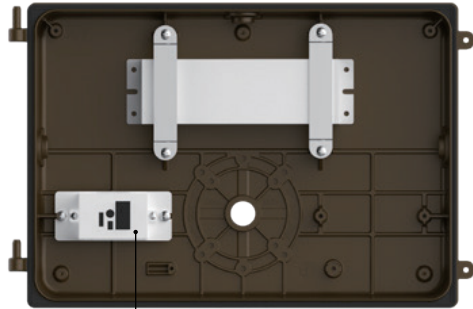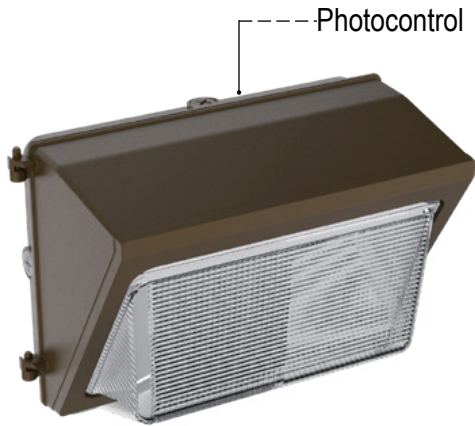

CCT Adjustable(3000k,4000k,5000k);
Power Adjustable(100%-80%-60%)

Warranty

Five years limited warranty is standard. Ten years limited warranty can be option.

Note:

Specifications subject to change without notice.