



Canoe Pendant Light






The Canoe pendant light body is constructed of high quality, die-cast aluminum alloy, and features a recessed honeycomb lens. This honeycomb cellular light control system reduces the glare effectively. In addition, the lamp body can be ordered wrapped in attractive acoustic style fabric. This fixture is ideal in offices, conference rooms, public buildings, libraries, and other commercial lighting applications.

Input Watts (Nominal):	38W
Input Voltage:	120V-347V
Lumen Output	2000
ССТ	4000K
CRI	80
Working Temperature:	-4-104°F (-20-40°C)

Linkable




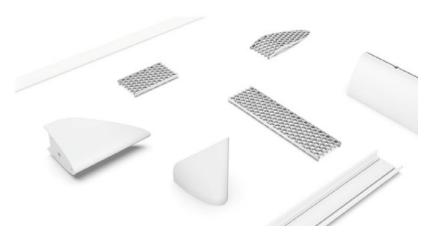







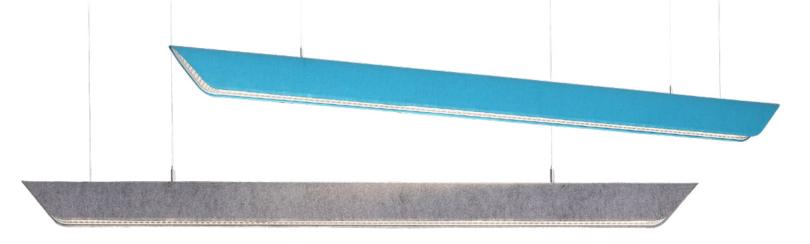

Aluminum alloy body and die-casting ends Three-dimensional arc design of the end Honeycomb lens

Color Options



