



## SSTRW SLIM LED STRIP



### PRODUCT DESCRIPTION

The SSTRW LED Slim Strip features a slim, low-profile and traditional design with diffused lens. Comes in 2ft, 4ft and 8ft. Field-adjustable light output and CCT. Buckle design, convenient disassembly and assembly. It can be widely used in warehouse, office, garage, display shop and other commercial applications.

### FEATURE

- CCT selectable (3500K, 4000K, 5000K in one)
- Wattage selectable
- Emergency battery back up optional
- Microwave motion sensor available
- Buckle design, Convenient disassembly and assembly

### ELECTRICAL SYSTEM

- Input Voltage: 120-277V 50/60Hz
- Minimum Ambient -20°C, Maximum Ambient is 40°C
- Power Factor: > 0.86 at full load
- Total Harmonic Distortion: < 20% at full load

### PERFORMANCE

CRI

80

CCT

3500K、 4000K、 5000K

Dimming

1-10V Dimming Standard

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-4-104°F (-20-40°C)


Certifications

- cULus conforms to UL Std. 1598Cert. to CSA Std. C22.2 No.250.0
- Suitable for damp locations
- RoHs compliant


### SPECIFICATION

2FT

564/22.2"




72/2.8"




4FT

1202/47.3"



8FT

2392/94.2"



## Ordering Information

### Example: SSTRW-12D-40SP-SW1

Slim Strip	Dimension	Dimmable	- Watts	- CCT	Voltage	- Control	Finish
<b>SSTRW</b>	<b>06 - 2FT</b>	<b>D - 0-10V</b> Dimmable	<b>25SP</b> - Selectable Power 15W/ 20W/25W <sup>1</sup>	<b>SW</b> - Selectable White 3500K/ 4000K/5000K <sup>2</sup>	<b>1-120 - 277V</b>	<b>Blank</b> -None  <b>MSW</b> -Microwave Motion Sensor	<b>Blank</b> -White
	<b>12 - 4FT</b>		<b>40SP</b> - Selectable Power 25W/ 30W/40W <sup>1</sup>			<b>EBU</b> -Emergency Battery Back-up	
	<b>24 - 8FT</b>		<b>65SP</b> - Selectable Power 55W/ 60/65W <sup>1</sup>				

1. Default setting: 20W for 2ft, 30W for 4ft, 60W for 8ft.
2. 4000K is default setting.

\* White finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information

### Accessories Standard (packed and shipped together with fixture)



1.2M Aircraft Cable



J-Box Cover



V-Hook


### Accessories Option (Ordered separately)



Surface Mount Kit



Linkable Kit

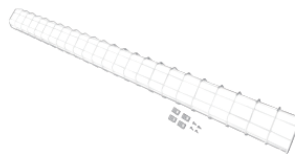

Wire Guard



**RC-100**  
Remote control for sensor

## PERFORMANCE DATA

### LUMEN OUTPUT


Lumen values are estimated with LED data sheet.

Watts	Lumen Output	Size	CRI	AC Input 120V	CCT	LPW
15	2280	2FT	80	0.12A	4000K	152
20	3000	2FT	80	0.17A	4000K	150
25	3700	2FT	80	0.21A	4000K	148
25	3800	4FT	80	0.21A	4000K	152
30	4600	4FT	80	0.25A	4000K	153
40	6100	4FT	80	0.33A	4000K	152
55	8500	8FT	80	0.46A	4000K	154
60	9000	8FT	80	0.50A	4000K	150
65	9600	8FT	80	0.54A	4000K	147

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

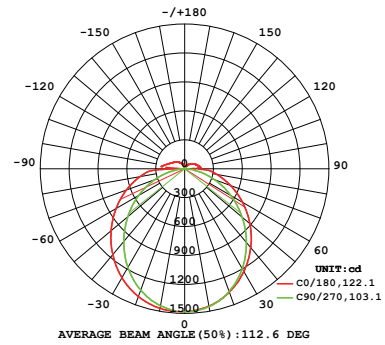

Ref#: 20230912



Buckle design, Convenient disassembly and assembly



CCT and Wattage selectable

## Warranty

Five year limited warranty.

Please refer to the instruction manual for motion sensor default setting.