



SOLID SQUARE RECESSED STEP AND WALL LIGHT



PRODUCT DESCRIPTION

Compact and inconspicuous design with asymmetrical light distribution, directing light downward, minimizing uplight while revealing the texture of the stepped baffle. Die-cast aluminum housing, silicone rubber gasket, tempered glass, akzoNobel powder coating. Heavier powder coating optional for marine ambient corrosion resistance. Ideal for the illumination of ground surfaces, building entrances, stairs and footpaths.

FEATURES

- Heavy duty cast aluminum housing
- Tempered glass lens
- Stainless steel pre-installed housing
- Marine grade treatment available
- Asymmetrical light distribution

ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Operating temperature range: -4-104°F (-20-40°C)
- Power Factor: > 0.9 at full load
- 0-10V dimming
- Total Harmonic Distortion: < 20% at full load

PERFORMANCE

CRI

80

CCT

3000K、 4000K

Dimming

Not dimming is standard

0-10V Dimming optional

Projected Lifetime

L70 - 100,000 Hours

Working Temperature


-4-104°F (-20-40°C)

Certifications

- cETLus
- IP65 rated
- RoHS compliant

DIMENSION

8W

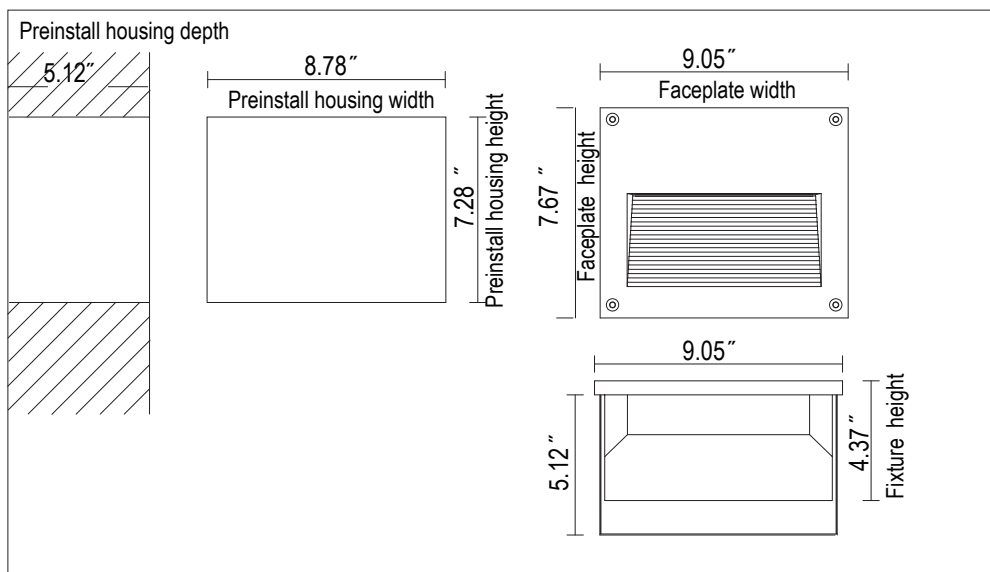

Ordering Information

Example: SSWL08301-RM-BK


Name	Wattage/Size	-CCT	Voltage	-Control	-Installation	- Faceplate Finish	-Option
SSWL	08 - 8W	30 - 3000K 40 - 4000K	1 - 120-277V	Blank - None	RM - Recessed	BK - Black RAL9011 WH - White RAL9016 GY - Gray RAL7012 BZ - Bronze SL - Silver RAL9006 * Black (standard color) see notes for all other faceplate colors	Blank - None M - Marine ambient corrosion resistance D - 0-10V Dimming ¹

Notes:

* Please choose the preinstall box in following Accessory Table.

* Black finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

Accessories (Ordered separately)




91409

SSWL-9IN-PBOX

Preinstall box for
9" SSWL step light

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

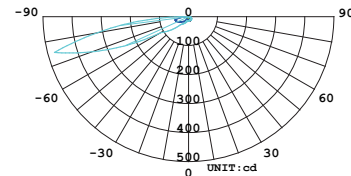

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Norminal Watts	Measured Watts	Delivered Lumen	CCT	CRI
8W	8W	167lm	3000K	80

Warranty

Two years limited warranty.

Note:

Specifications subject to change without notice.