

## SOLID SLIM RECESSED STEP AND WALL LIGHT



### PRODUCT DESCRIPTION

Compact and inconspicuous design with asymmetrical light distribution, directing light downward, minimizing uplight while revealing the texture of the stepped baffle. Die-cast aluminum housing, silicone rubber gasket, tempered glass, akzoNobel powder coating. Heavier powder coating optional for marine ambient corrosion resistance. Ideal for the illumination of ground surfaces, building entrances, stairs and footpaths.

### FEATURES

- Heavy duty cast aluminum housing
- Tempered glass lens
- Stainless steel pre-installed housing
- Marine grade treatment available
- Asymmetrical light distribution

### ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Operating temperature range: -4-104°F (-20-40°C)
- Power Factor: > 0.9 at full load
- 0-10V dimming
- Total Harmonic Distortion: < 20% at full load

### PERFORMANCE

CRI

80

CCT

3000K, 4000K

Dimming

**Not dimming is standard**

0-10V Dimming optional

Projected Lifetime

**L70 - 100,000 Hours**


Working Temperature

**-4-104°F (-20-40°C)**

Certifications

- cETLus
- IP65 rated
- RoHS compliant

### DIMENSION

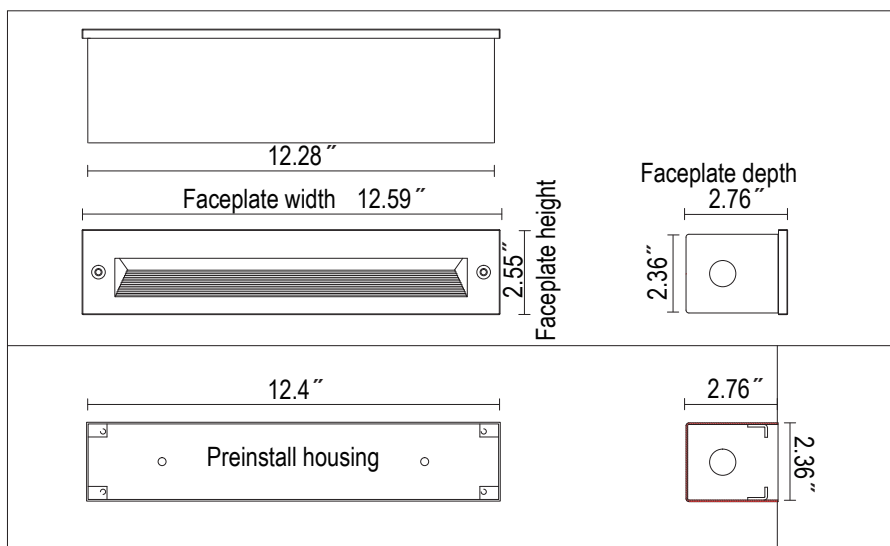

## Ordering Information


### Example: SMWL12301-RM-BK

Name	Wattage	CCT	Voltage	-Control	-Installation	-Faceplate Finish	-Option
SMWL	12 - 12W	30 - 3000K 40 - 4000K	1 - 120-277V	Blank - None	RM - Recessed	<b>BK</b> - Black RAL9011 <b>WH</b> - White RAL9016 <b>GY</b> - Gray RAL7012 <b>BZ</b> - Mineral bronze <b>SL</b> - Silver RAL9006	<b>Blank</b> - None <b>M</b> - Marine ambient corrosion resistance <b>D</b> - 0-10V Dimming
						* Black (standard color) see notes for all other faceplate colors	

#### Notes:

- \* Please choose the preinstall box in following Accessory Table.
- \* Black finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

### Accessories (Ordered separately)




**91404**

**SMWL-12IN-PBOX**

Preinstall box for 12" SMWL step light

## PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

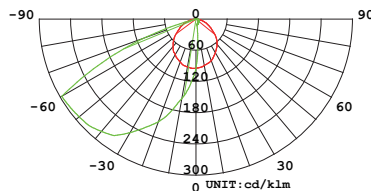

## PERFORMANCE DATA

### LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Delivered Lumen	CCT	CRI
12W	<b>460lm</b>	3000K	80

## BUG Rating

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
SMWL12301	B0-U0-G0

## Warranty

Two years limited warranty.

Specifications subject to change without notice.