



SOLID RECTANGULAR RECESSED STEP AND WALL LIGHT



**DARKSKY
APPROVED**
Reduces light pollution
Certified by DarkSky.org



PRODUCT DESCRIPTION

Compact and inconspicuous design with asymmetrical light distribution, directing light downward, minimizing uplight while revealing the texture of the stepped baffle. Open faceplate and louver faceplate available. Die-cast aluminum housing, silicone rubber gasket, tempered glass, akzoNobel powder coating. Heavier powder coating optional for marine ambient corrosion resistance. Ideal for the illumination of ground surfaces, building entrances, stairs and footpaths.

FEATURES

- Heavy duty cast aluminum housing
- Stainless steel pre-installed housing
- Tempered glass lens
- Marine grade treatment available
- Asymmetrical light distribution
- Open and louver faceplate available

ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Operating temperature range:
-4-104°F (-20-40°C)
- Power Factor: > 0.9 at full load
- 0-10V dimming
- Total Harmonic Distortion: < 20% at full load

PERFORMANCE

CRI

80

CCT

3000K, 4000K

Dimming

Not dimming is standard

0-10V Dimming optional

Working Temperature

-4-104°F (-20-40°C)

Certifications


- cETLus
- IP65 rated
- RoHS compliant
- DarkSky Approved

Notes:


Only 3000K is DarkSky Approved.

DIMENSION


6W/7"

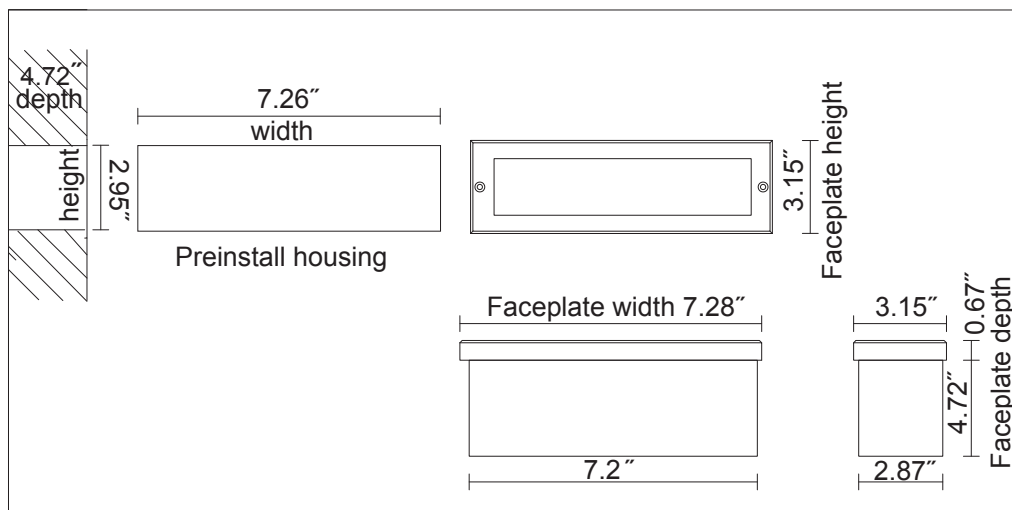


7W/9"

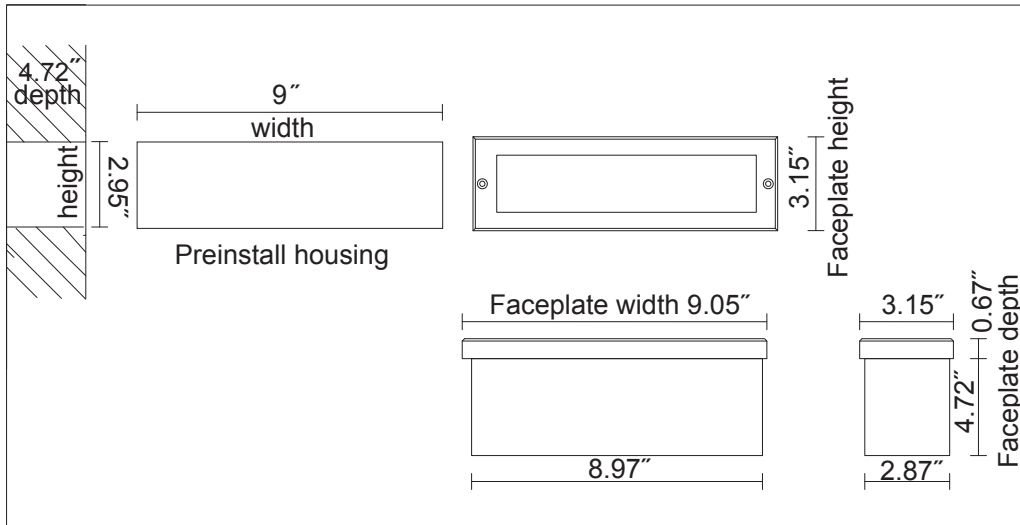

8W/10"

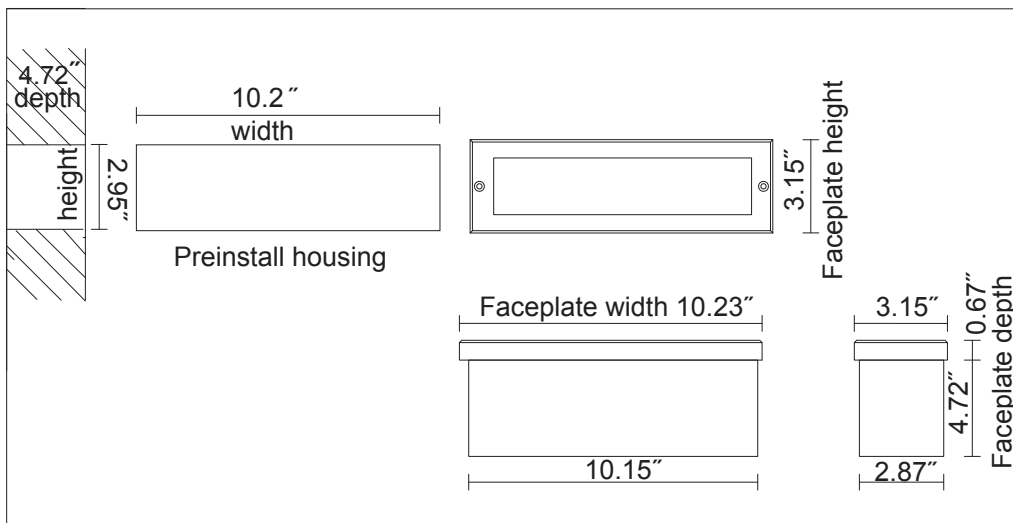

10W/20W/12"

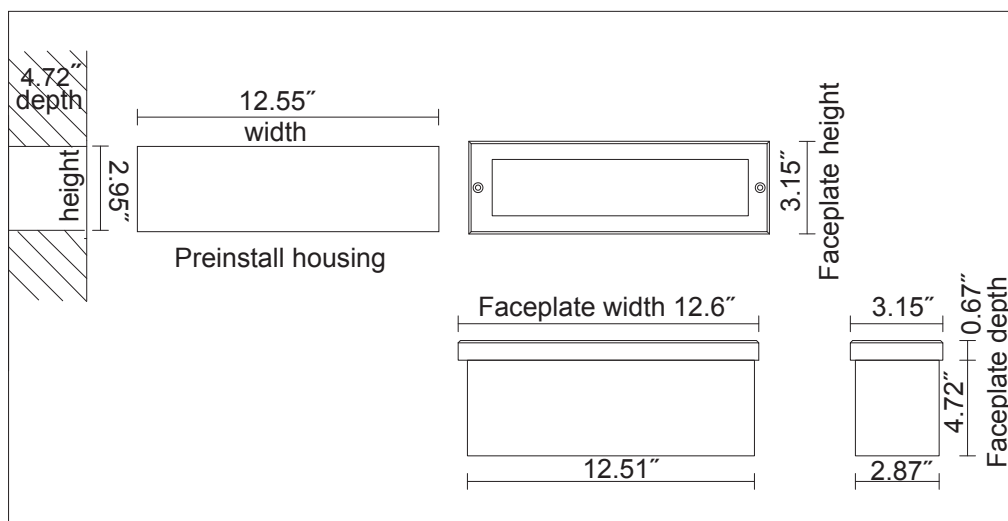

Ordering Information

Example: SRWL0607-301-RM-OP-BK

Name	Wattage/Size	-CCT	Voltage	-Control	-Installation	Faceplate	- Faceplate Finish	-Option
SRWL	0607 - 6W/7"	30 - 3000K	1 - 120-277V ¹	Blank - None	RM - Recessed	OP - Open	BK - Black	Blank - None
	0709 - 7W/9"	40 - 4000K				LV - Louver	RAL9011	M - Marine ambient corrosion resistance
	0810 - 8W/10"	R - Red					WH - White	D - 0-10V Dimming ¹
	1012 - 10W/12"	G - Green					RAL9016	
	2012 - 20W/12"	B - Blue					GY - Gray	
							RAL7012	
							BZ - Bronze	
							SL - Silver	
							RAL9006	

* Black (standard color) see notes for all other faceplate colors

Notes:

1. 0-10V dimming is not available for 6W.

* Please choose the preinstall box in following Accessory Table.

* Black finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

Accessories (Ordered separately)



91405

SRWL-7IN-PBOX

Preinstall box for
7" SRWL step light

91406

SRWL-9IN-PBOX

Preinstall box for
9" SRWL step light

91407

SRWL-10IN-PBOX

Preinstall box for
10" SRWL step light

91408


SRWL-12IN-PBOX

Preinstall box for
12" SRWL step light


PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

Open Faceplate

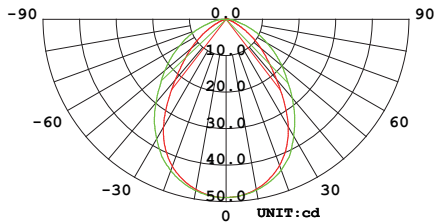

Louver Faceplate

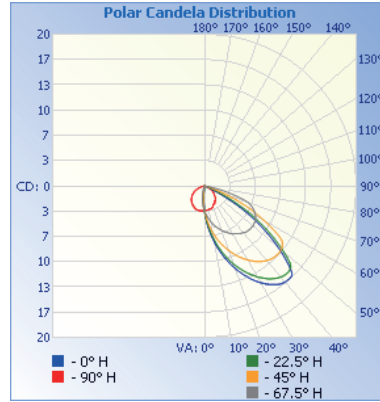

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Open Faceplate

Norminal Watts	Measured Watts	Size	Delivered Lumen	CCT	CRI
6W	5W	7"	94lm	3000K	80
7W	6W	9"	110lm	3000K	80
8W	8W	10"	132lm	3000K	80
10W	12W	12"	136lm	3000K	80
20W	20W	12"	344lm	3000K	80

Louver Faceplate

Norminal Watts	Measured Watts	Size	Delivered Lumen	CCT	CRI
6W	5W	7"	18lm	3000K	80
7W	6W	9"	25lm	3000K	80
8W	7W	10"	74lm	3000K	80
10W	9W	12"	31lm	3000K	80
20W	20W	12"	73lm	3000K	80

Warranty

Two years limited warranty.

Note:

Specifications subject to change without notice.