



PILLAR SQUARE LED BOLLARD



PRODUCT DESCRIPTION

The Pillar square led bollard has UV powder coated die cast high quality aluminum body moulded silicone gasket and stainless steel screws. Wattage and CCT Selectable. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.


FEATURE

- Die cast aluminum body
- Wattage and CCT Selectable
- IP65 rated for wet location

ELECTRICAL SYSTEM

- Input Voltage: 120-277V
- 50/60Hz
- Minimum Ambient -86°F, maximum ambient 104°F
- Power Factor: > 0.9 @120Vac
- Total Harmonic Distortion: < 20%

DIMENSION

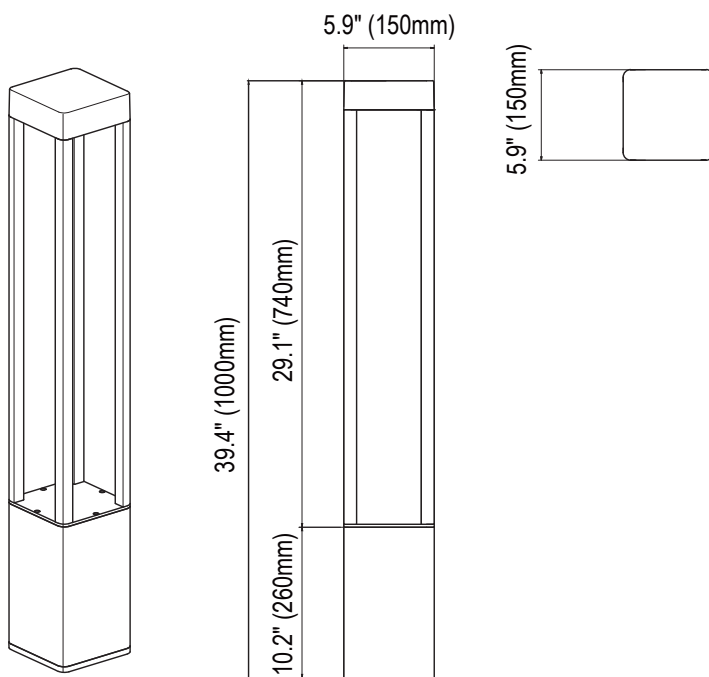

PERFORMANCE

CRI

80

CCT

3000K, 4000K, 5000K

Dimming

Not dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-30°C to + 40°C (-86°F to 104°F)

Certifications

- cETL listed
- Suitable for wet location
- IP65 rated
- RoHS compliant

Ordering Information

Example: PSBD40H-SP-SW1-BK

| Name | Height | _ Watts | _ CCT | Voltage | _ Controls | _ Finish |
|-----------------------------|------------------|--|----------------------------------|--------------|--------------|---|
| PSBD- Pillar Square Bollard | 40H - 39.4" High | SP - 10W/15W/20W selectable ¹ | SW- 3000K/4000K 5000K Selectable | 1 - 120-277V | Blank - None | BK - Black Optional Finish Colors (Need Additional Charge)* |


Note:

- * 20W is default setting.
- * 3000K is default setting.
- * Black finish is standard. Additional charges will apply for all the other colors. Please contact customer service for premium adder.

ACCESSORIES (ORDER SEPARATELY)

ABMK-PSBD

Anchor bolts mounting kits



PERFORMANCE DATA

LUMEN OUTPUT

| Watts | Lumen Output | AC Input 120V | CRI | CCT |
|-------|--------------|---------------|-----|-------|
| 10W | 1100lm | 0.08A | 80 | 3000K |
| 15W | 1500lm | 0.13A | 80 | 3000K |
| 20W | 2000lm | 0.17A | 80 | 3000K |

Warranty

Five year limited warranty.