

CURVE LIN SERIES MAGNETIC TRACK LIGHT

GENERAL SPECIFICATION

The Curve LIN series is a linear lighting solution designed to work with our Curve Magnetic Track System. It features a low glare diffused lens and is available in several different wattage/ length combinations all housed in an elegant body.

CCT: 2700K/3000K/4000K

CRI: RA90

Lens: Diffused

DIM: Triac,0/1-10V,


Installation: Magnetic

Environment: Indoor



DIMENSION

7W

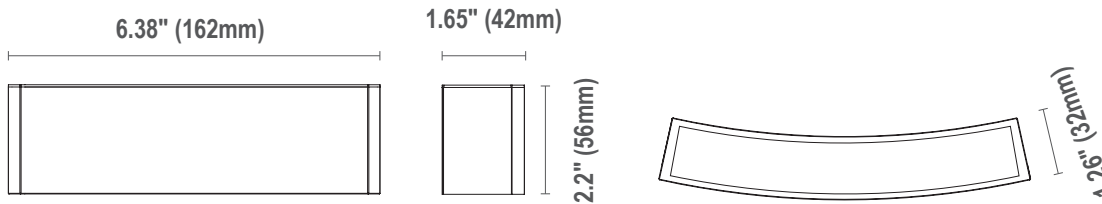

Ordering Information

Example: CLIN07-3090-24V-DL-MTM-BK

Series	Watts	- CCT&CRI	- Voltage	Lens	Installation	- Finish
CLIN	07 - 07W/6.38"	2790 - 2700K 90Ra	24V-24Vdc ¹	DL - Diffused Lens	MTM - Magnetic Track Mount	BK -Black ²
		3090 - 3000K 90Ra				WH -White ²
		4090 - 4000K 90Ra				

Notice:


1. The fixture is used for 24V magnetic track system.
2. Standard Finish is black and white. Custom colors might be available at an additional fee.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

Ref#: 20241015

Diffuse



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00

PERFORMANCE DATA

Lumen values are estimated with LED data sheet.

Watts	Lumen Output	CRI	Lens	CCT	LPW
7	490	90	Diffused	3000K	70