

#### CURVE GLOWBALL MAGNETIC TRACK LIGHT

## **G**ENERAL **S**PECIFICATION


Our Curve Glowball Series Magnetic Track Light is designed for decorative and general lighting. The diffuse spherical glass lens yields a smooth uniform light output, and the fixture is available as both a pendant or surface mounted to our 24V magnetic track system.

CCT: 2700K/3000K/4000K CRI: RA90 DIM: Triac,0/1-10V, Installation: Magnetic Environment: Indoor





# DIMENSION

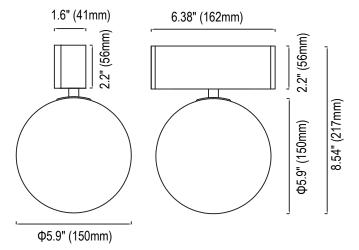

### Ordering Information Example: CGBL05-3090-24V-SM-BK

Series	Watts	- CCT&CRI	- Voltage	Lens	Installation	- Finish
CGBL	<b>05</b> - 5W	<b>- 2790</b> - 2700K 90Ra <b>3090</b> - 3000K 90Ra <b>4090</b> - 4000K 90Ra	<b>- 24V</b> -24Vdc <sup>1</sup>	Blank - Diffused	SM - Surface Magnetic Track Mount	- <b>BK</b> -Black <sup>2</sup> Optional <b>WH</b> -White <sup>2</sup>

Notice:

1. The fixture is used for 24V magnectic track system.

2. Standard Finish is black. Custom colors might be available for an additional fee. Please check with Customer Service for more information.




## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

#### 2700K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)	
1	24	Φ2	
2	6	Φ4	
3	2	Φ6	
4	1	Φ8	
5	0.9	Φ10	

### PERFORMANCE DATA

Lumen values are estimated with LED data sheet.

Watts	Lens	Lumen Output	CRI	ССТ	LPW
5	Diffused	350	90	3000K	70