

DIR LED BULK HEAD LIGHT



Open Guard



Eyelid Guard



Cross Guard



Grid Guard



PRODUCT DESCRIPTION

The DIR LED Bulkhead fixture has die-casting aluminum body and opal polycarbonate lens. A range of lumen options available from 1500 to 3500 lumens. Designed to endure extreme environmental conditions and physical abuse.

FEATURES

- Five CCTs are in one
- Wattage selectable
- Photocontrol is available
- Guards are available in Open, Cross, Eyelid and Grid
- IP65 for wet location

ELECTRICAL SYSTEM

- Input voltage: 120-277V, 50/60Hz
- THD ≤ 20%
- Power Factor: >0.9
- Working Temperature: -40-104°F (-40-40°C)

PERFORMANCE

CRI
70 is standard
80 is optional
CCT
3000K/3500K/4000K/5000K/6500K


Dimming
0-10V dimming driver

Projected Lifetime
L70 -100,000 Hours


Working Temperature
-40-104°F (-40-40°C)

Certifications
• cUL listed
• Suitable for wet locations
• RoHs compliant


SPECIFICATION

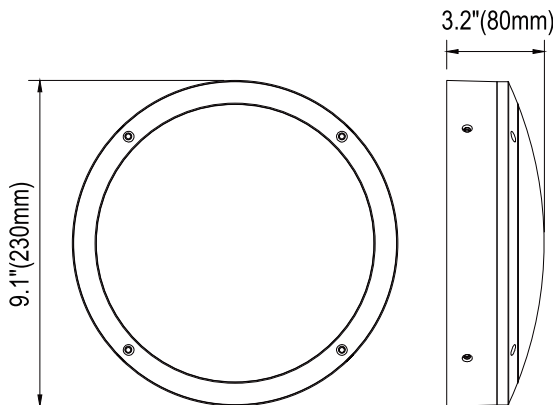


Open Guard

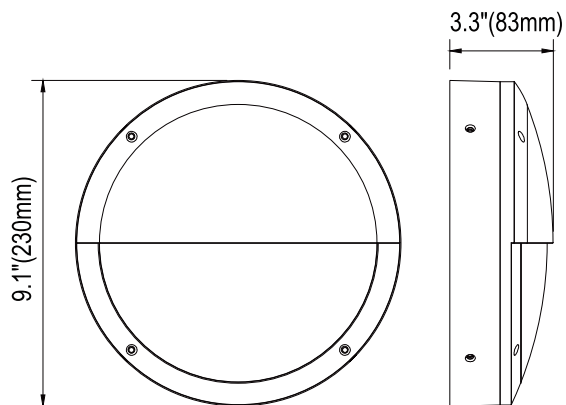

Eyelid Guard

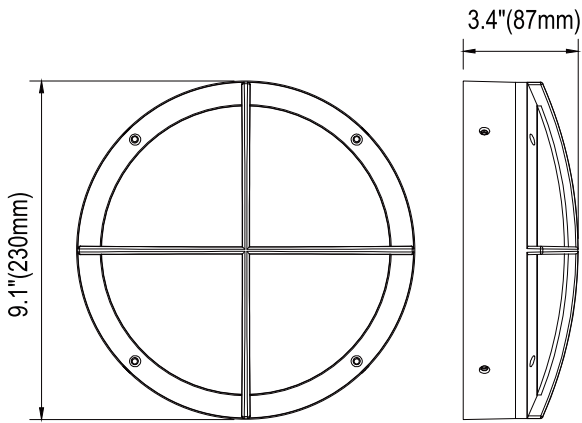

Cross Guard

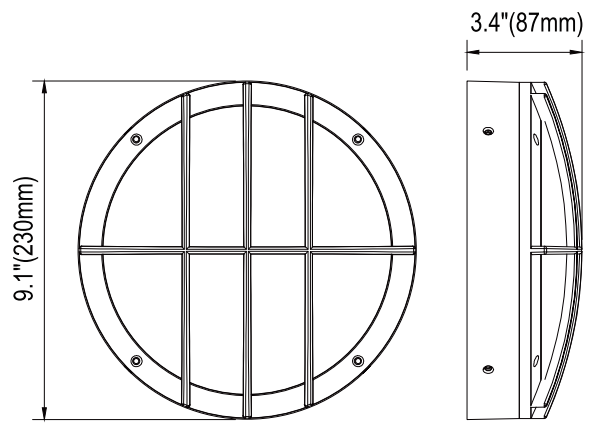

Grid Guard

Ordering Information

Example: DIR9-30SP-SW1-PC-OP-BK


Series	Watts	CCT	Voltage	Control	Guard	Finish
DIR9	30SP- 18W/24W/30W Selectable ¹	SW-3000K/3500K 4000K/5000K/6500K ²	1 -120-277V	PC - Photocontrol ³	OP - Open CS - Cross ED - Eyelid GD - Grid	BK - Black

Notice:


- * 30W is default setting.
- * 4000K is default setting.
- * Photocontrol can be set ON and OFF by the DIP switch on the fixture. Photocontrol default setting is OFF.
- * Black finish is standard. Custom color is available at an additional cost.

PHOTOMETRY


All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

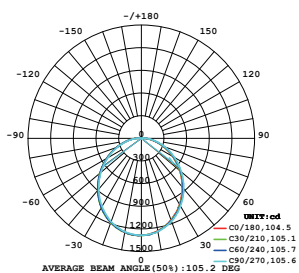


Open Guard

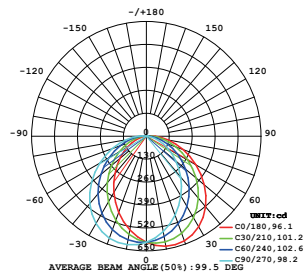

Eyelid Guard

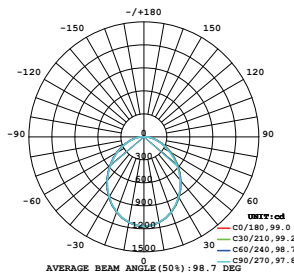

Cross Guard

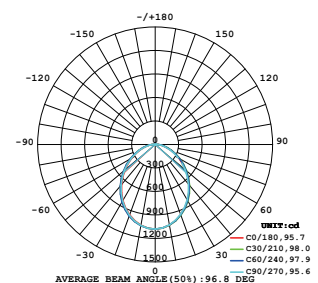

Grid Guard

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Guard	Power	CCT	Voltage	Lumen	LPW
Open	30W	3000K	120-277V	3200LM	105
		3500K	120-277V	3300LM	110
		4000K	120-277V	3500LM	115
		5000K	120-277V	3300LM	110
		6500K	120-277V	3200LM	105
Eyelid	30W	3000K	120-277V	1550LM	50
		3500K	120-277V	1580LM	52
		4000K	120-277V	1650LM	55
		5000K	120-277V	1580LM	52
		6500K	120-277V	1550LM	50
Cross	30W	3000K	120-277V	2850LM	95
		3500K	120-277V	2950LM	100
		4000K	120-277V	3050LM	105
		5000K	120-277V	2950LM	100
		6500K	120-277V	2850LM	95
Grid	30W	3000K	120-277V	2600LM	85
		3500K	120-277V	2700LM	90
		4000K	120-277V	2800LM	95
		5000K	120-277V	2700LM	90
		6500K	120-277V	2600LM	85

Ref#: 20240904

Warranty

Five year limited warranty.

Specifications subject to change without notice.