



GALENE LED WALL LIGHT

Direct Light



PRODUCT DESCRIPTION

The Galene wall light is designed in a round or square shape with durable powder coat paint. It combines aluminum structure with a tempered glass diffuser radiating light downward against the wall where installed.

FEATURES


- Round and square shapes available
- Direct light
- 3000K, 4000K and 5000K selectable
- Wattage selectable
- Wide voltage 120-347V

ELECTRICAL SYSTEM


- Input voltage: 120-347V
- 50/60Hz
- Power Factor: >0.9
- Working Temperature: -40-104°F (-40-104°F)

DIMENSION

Round Shape

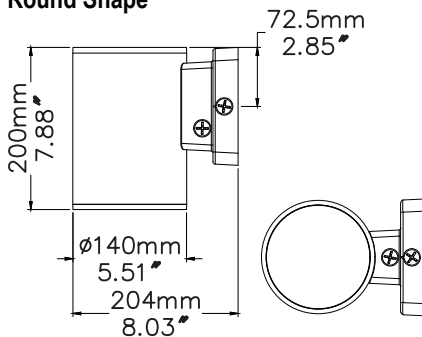


Square Shape

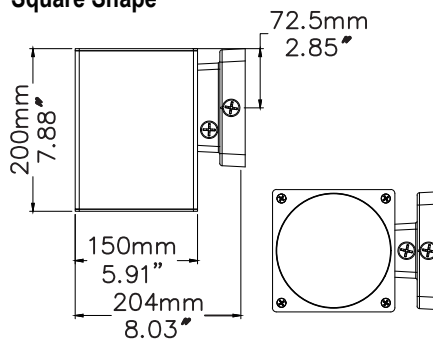


PHOTOMETRY


All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

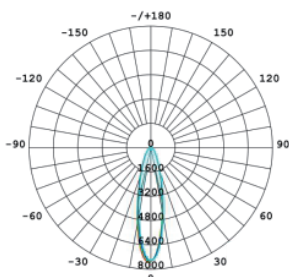

25°

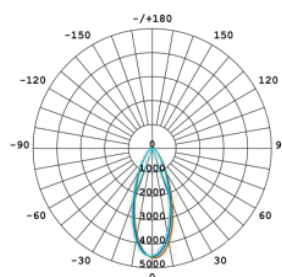

45°

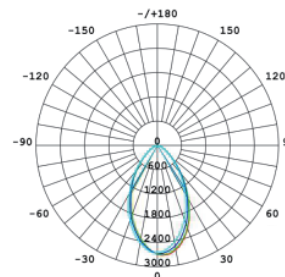

60°

PERFORMANCE

CRI

70

CCT

3000K, 4000K, 5000K

Dimming

Non dimming

Projected Lifetime

L70 -100,000 Hours

Working Temperature

-40 - 104°F (-40 - 40°C)

Certifications

- cUL listed
- Suitable for wet locations
- RoHs compliant

Ordering Information

Example: GD-RSP-SW8-60-BK

Model	- Shape	Watts	- CCT	Voltage	Control	- Beaming Angle	- Finish
GD - Galene Direct	R - Round S - Square	SP - Selectable Power 10W/20W ¹	SW - Selectable White 3000K/4000K/5000K ²	8 -120-347V	Blank - None	25 -25° 45 -45° 60 -60°	BK - Black

Ref#: 20230309

Notice:

- 20W is the default setting. 10W can be set by the DIP switch on the fixture.
 - 4000K is the default setting. If other CCT is needed, please contact Customer Service in advance to change the setting in factory or change the setting in the field.
- * Standard Finish is Black. Additional charge will apply for custom finish.

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	AC Input 120V	CCT	Beam Angle	CRI	LPW
20	2260	0.17A	4000K	45°	70	113
10	1200	0.08A	4000K	45°	70	120

* 0.92 multiplier is for 3000K and 5000K.

Warranty

Five year limited warranty.

Specifications subject to change without notice.