



## PILLAR SQUARE LED BOLLARD



### PRODUCT DESCRIPTION

The Pillar square led bollard has UV powder coated die cast high quality aluminum body moulded silicone gasket and stainless steel screws. Wattage and CCT Selectable. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.


### FEATURE

- Die cast aluminum body
- Wattage and CCT Selectable
- IP65 rated for wet location

### ELECTRICAL SYSTEM

- Input Voltage: 120-277V
- 50/60Hz
- Minimum Ambient -86°F, maximum ambient 104°F
- Power Factor: > 0.9 @120Vac
- Total Harmonic Distortion: < 20%

### DIMENSION

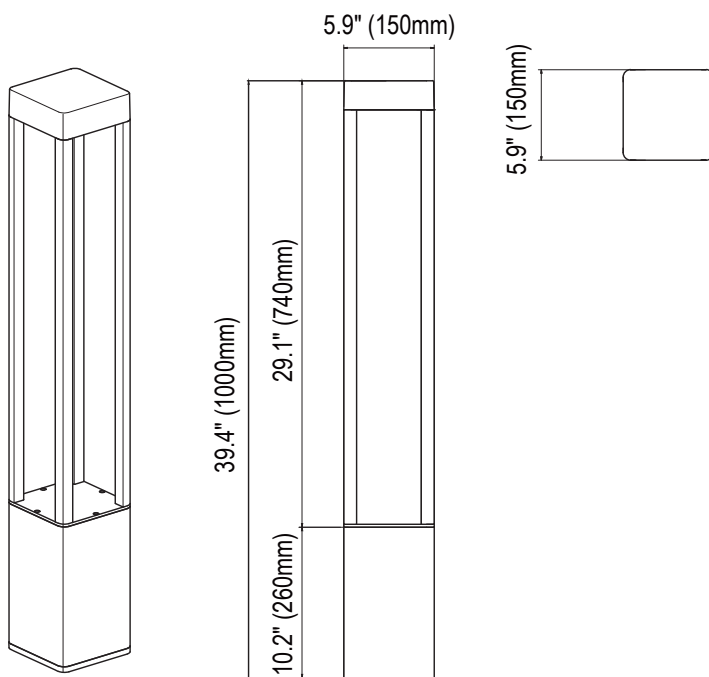

### PERFORMANCE

CRI

80

CCT

3000K, 4000K, 5000K

Dimming

Not dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-30°C to + 40°C (-86°F to 104°F)

Certifications

- cETL listed
- Suitable for wet location
- IP65 rated
- RoHS compliant

## Ordering Information

### Example: PSBD40H-SP-SW1-BK

Name	Height	_ Watts	_ CCT	Voltage	_ Controls	_ Finish
PSBD- Pillar Square Bollard	40H - 39.4" High	SP -10W/15W/20W selectable <sup>1</sup>	SW- 3000K/4000K 5000K Selectable	1- 120-277V	Blank - None	BK - Black  Optional Finish Colors (Need Additional Charge)*

#### Note:

\* 20W is default setting.

\* 3000K is default setting.

\* Black finish is standard. Additional charges will apply for all the other colors. Please contact customer service for premium adder.

## BUG Rating


Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
PSBD 10W 3000K	B1-U1-G0
PSBD 10W 4000K	B1-U1-G0
PSBD 10W 5000K	B1-U1-G0
PSBD 15W 3000K	B1-U1-G0
PSBD 15W 4000K	B1-U1-G0
PSBD 15W 5000K	B1-U1-G0
PSBD 20W 3000K	B1-U1-G0
PSBD 20W 4000K	B1-U1-G0
PSBD 20W 5000K	B1-U1-G0
PSBD40H-SP-SW1-BK(10W,4000K)_IESNA2002	B0-U1-G0
PSBD40H-SP-SW1-BK(14W,4000K)_IESNA2002	B0-U1-G0
PSBD40H-SP-SW1-BK(18W,4000K)_IESNA2002	B0-U1-G0

## ACCESSORIES (ORDER SEPARATELY) -

### ABMK-PSBD

Anchor bolts mounting kits



## PERFORMANCE DATA LUMEN OUTPUT

Watts	Lumen Output	AC Input 120V	CRI	CCT
10W	1100lm	0.08A	80	3000K
15W	1500lm	0.13A	80	3000K
20W	2000lm	0.17A	80	3000K

## Warranty

Five year limited warranty.