

OPAL LED WRAPAROUND LIGHT

3500K	4000K	5000K
32W	40W	48W
SELECTABLE		



PRODUCT DESCRIPTION

The low-profile OPAL led wraparound light with metal housing, milky polycarbonate end cap and diffuser provides widespread illumination. This cost effective LED utility wrap fixture provides high uniformity, excellent efficiency and reduced glare. Use in a wide variety of applications such as open offices, private offices, conference rooms, reception areas, retail, hallways, industrial assembly, retail open areas and educational facilities.

FEATURES

- Simple and elegant low-profile appearance
- Optical milky lens delivers unique beam angles and reduces glare
- Wattage and CCT selectable


ELECTRICAL SYSTEM

- Input Voltage: 120-277V, 50/60Hz
- Operating temperature range: -4-104°F (-20-40°C)
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

SPECIFICATION

4FT

Net Weight: 3.75lbs (1.7kg)

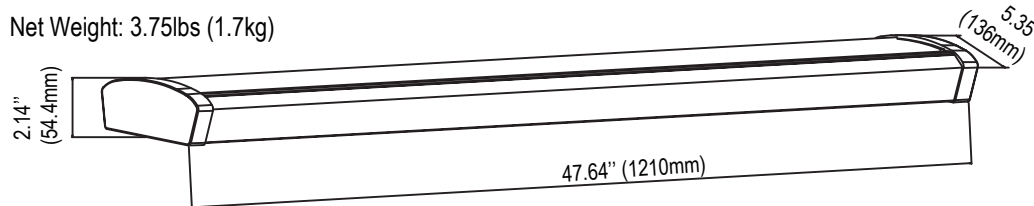

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Size	Nominal Lumen	CCT	CRI	LPW
32W	4FT	3680lm	4000K	>80	115
40W	4FT	4600lm	4000K	>80	115
48W	4FT	5520lm	4000K	>80	115

PERFORMANCE

CRI

80

CCT

3500K, 4000K, 5000K

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-4-104°F (-20-40°C)

Certifications

- cULus conforms to UL Std. 1598Cert. to CSA Std. C22.2 No.250.0
- RoHS compliant

Ordering Information

Example: OWRP12DSPSW1

Name	Dimension	Dimmable	Watts	CCT	Voltage	Lens	Control
OWRP	12 - 4FT	D - 0-10V Dimmable	SP - 32W/40W/48W ¹	SW - Selectable White 3500K/4000K/5000K ²	1 - 120-277V	Blank - Milky Polycarbonate Lens	Blank - None

Notes:

1. 48W is default setting.
 2. 4000K is default setting.
- * Minimum order required, please contact customer service for additional information
 - * White finish is standard. Additional charge will apply for optional finish.

Warranty

Five year limited warranty.

Note:

Specifications subject to change without notice.