



VENUS LED BOLLARD



PRODUCT DESCRIPTION

The VENUS led bollard has sleek and slim shape. It has fully shielded light distribution. This bollard has UV powder coated die cast high quality aluminum body, moulded silicone gasket and stainless steel screws. This bollard is an excellent choice for walkways, entrances, plazas, courtyards, driveways, bridges, and landscaped areas.

FEATURE

- Die cast aluminum body
- Fully shielded light distribution
- IP65 rated for wet location

ELECTRICAL SYSTEM

- Input Voltage: 120-277V
- 50/60Hz
- Minimum Ambient -22°F, maximum ambient 104°F
- Power Factor: > 0.9 @120Vac
- Total Harmonic Distortion: < 20%

PERFORMANCE

CRI

80

CCT

3000K, 4000K

Dimming

Not dimming

Projected Lifetime

L70 - 100,000 Hours

Working Temperature

-30°C to + 40°C (-22°F to 104°F)

Certifications

- cETL listed
- Suitable for wet location
- IP65 rated
- RoHS compliant

Ordering Information

Example: VSBD40H-10S401-BK

Name	Height	. Watts	CCT	Voltage	. Controls	. Finish
VSBD- Venus Bollard	40H - 39.4" High	10S - 10W Single Head	30 - 3000K 40 - 4000K	1 - 120-277V	Blank - None	BK - Black Optional Finish Colors (Need Additional Charge)*

Note:

* Black finish is standard. Additional charges will apply for all the other colors. Please contact customer service for premium adder.

ACCESSORIES (ORDER SEPARATELY)



91415

ABMK-VSBD


Anchor bolts mounting kits for Venus Bollard

PERFORMANCE DATA

LUMEN OUTPUT

Watts	Lumen Output	AC Input 120V	CRI	CCT
10W	900lm	0.08A	80	4000K


DIMENSION

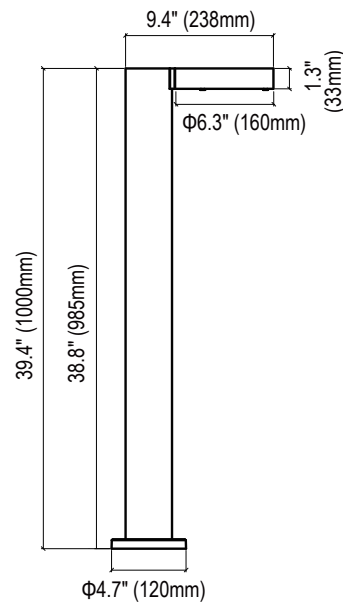

Ref#: 20250208

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.



BUG Rating

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
VSBD40H-10S301-BK	B1-U0-G0

Warranty

Five year limited warranty.