





Selectable Bollard Series



Conical Louvers Bollard

Ordering Information:
CLFB-40H-25SPSW1-360-BK

Name	Height	Watts	CCT	Voltage	Distribution	Finish
CLDB - Louvers Dome Top	40H - 40" High	25SP -10/18/25W Selectable ¹	SW - 3000K 4000K 5000K Selectable ²	1 - 120-277V	360 - 360° ³ 180 - 180° ³	BK - Black
CLFB - Louvers Flat Top						

- Conical Louver design
- High quality extrusion aluminum body
- Dome and flat top for option
- Wattage and CCT selectable available
- IP 65 rated for wet location



Sceley LED Bollard

Ordering Information:
SCBD42H-25SP-SW1-V-BK

Name	Pole Height	Watts	CCT	Voltage	Controls	Distribution	Finish
SCBD - Sceley Bollard	42H - 42" High 19H - 18.7" High	25SP - 25W Selectable ¹	SW - 3000K 4000K 5000K Selectable ²	1 - 120-277V	Blank - None EBU - Emergency Battery Back-up ³	V - Type V	BK - Black (RAL9017) Finish Colors (Need Additional Charge)*

- 18.7 and 42 height available
- Wattage and CCT selectable
- Efficiency is up to 130lm/W
- IP66 rated for wet location
- IK10 rated





Versatile Series LED Bollard

Ordering Information:
VBD24401-V-BK

Name	Pole Height	Watts	CCT	Voltage	Controls	Distribution	Finish
VBD - Versatile Bollard	Order and shipped separately¹	14- 14 Watts	30 - 3000K	1 - 120-277V	Blank - None EBU - Emergency Battery Back-up²	V - Type V III- Type III	Standard
		24- 24 Watts	40 - 4000K				BK - Black
			50 - 5000K				Optional*
	20H - 20" High Pole						Blank -Bronze
	35H - 35" High Pole						WH- White
							GY - Grey
							(See Notes)

- Simple and sleek design
- Symmetric and and asymmetric distributions
- House side shield available
- 20" and 35" high optional
- IP 65 rated for wet location



Selectable Square LED Bollard

Ordering Information:
SPB32HSPSW1-V

Top	Height	Watts	CCT	Voltage	Controls	Distribution	Finish
SPB - Pillar SGB - Grille	32H - 32" High	SP - Selectable Power 12W/24W¹	SW- Selectable White 3000K/ 4000K/5000K²	1 - 120-277V	Blank - None	V - Type V	Standard
							Blank -Bronze
							Optional*
							BK - Black
							WH- White
							GY - Grey
							(See Notes)

- Square-shaped and architectural appeal
- High quality extrusion aluminum body
- Stainless steel, silicone rubber sealing
- IP 66 rated for wet location





Selectable Standard LED Bollard

Ordering Information:
SPB32HSPSW1-V

Top	Height	Watts	CCT	Voltage	Controls	Distribution	Finish
DB = Dome Top Bollard ¹ FB = Flat Top Bollard PB = Peak Top Bollard	32H - 32" High ¹ 42H - 42" High ¹	SP - Selectable Power 12W/24W ²	SW - Selectable White 3000K/ 4000K/5000K ³	1 - 120-277V	Blank - None	V - Type V	Standard Blank - Bronze Optional* BK - Black WH - White GY - Grey (See Notes)

- Square-shaped and architectural appeal
- High quality extrusion aluminum body
- Stainless steel, silicone rubber sealing
- IP 66 rated for wet location



Louvers Round LED Bollard

Ordering Information:
LFB42H24401-V


Name	Height	Watts	CCT	Voltage	Controls	Distribution	Finish
LDB - Louvers Dome Top LFB - Louvers Flat Top	32H - 32" High ¹ 42H - 42" High ¹	24- 24 Watts	30 - 3000K 40 - 4000K 50 - 5000K	1 - 120-277V	Blank - None	V - Type V	Standard Blank -Bronze Optional* BK - Black WH - White GY - Grey (See Notes)
		SP - Selectable Power 12W/24W ²	SW - Selectable White 3000K/ 4000K/5000K ³				

- Louver and a rounded, cylindrical design
- High quality extrusion aluminum body
- Dome and flat top for option
- 32" and 42" high optional
- Wattage and CCT selectable available
- IP 65 rated for wet location



Selectable Ceiling And Wall Series



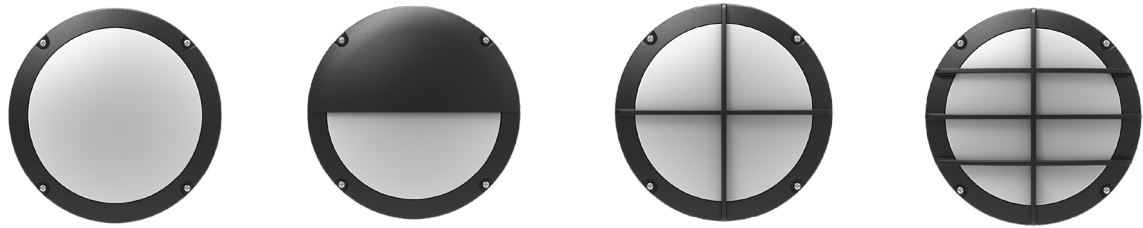

DIR LED Bulk Head Light

Ordering Information:
DIR9-30SP-SW1-PC-OP-BK

Series	Watts	CCT	Voltage	Control	Guard	Finish
DIR9	30SP- 18W/24W/30W Selectable ¹	SW -3000K/3500K 4000K/5000K/6500K ²	1 -120-277V	PC - Photocontrol ³	OP - Open CS - Cross ED - Eyelid GD - Grid	BK - Black

- Five CCTs are in one
- Wattage selectable
- Photocontrol is available
- Guards are available in Open, Cross, Eyelid and Grid
- IP65 for wet location



Galene Cylinder Wall Light-Direct and Indirect Light

Ordering Information:
GID-RSP-SW8-60-BK

Model	- Shape	Watts	- CCT	Voltage	Control	- Beaming Angle	Finish
GID - Indirect and Direct	- R - Round S - Square	SP - Selectable Power 20/40W ¹	- SW - Selectable White 3000K/4000K/5000K ²	8 -120-347V	Blank - None	25 -25° 45 -45° 60 -60°	- BK - Black

- Round and square shapes available
- Direct and indirect light
- 3000K, 4000K and 5000K selectable
- Wattage selectable
- Wide voltage120-347V





Carlo Cylinder Light

Ordering Information:
CCL4-07-20SPSW8-40-PSM-BK

Diameter	-Length	-Watts	CCT	Voltage	- Beaming Angle	- Installation	- Finish
CCL3 - 3"	06 - 6.14"	10SP -6W/8W/10W Selectable ²	SW- 3000K/4000K 5000K Selectable ³	1 -120-277V	25-25° 40-40° 60-60°	PSM - Pendant and surface Mount ⁴	BK - Black ⁵ Optional Finish Colors (Need Additional Charge)*
CCL4 - 4"	07 - 7.44" 12 ¹ - 12"	20SP -12W/16W/20W Selectable ²	SW -2700K/3000K 3500K/4000K5000K Selectable ³	8 -120-347V			
CCL6 - 6"	08 - 8.66"	30SP -18W/24W/30W Selectable ²	SW -2700K/3000K 3500K/4000K5000K Selectable ³	8 -120-347V			

- IP 65 rated
- Pendant and surface mount
- Field selectable beam angle: 25°/40°/ 60°
- Anti-glare design to reduce glare light
- Wattage and CCT selectable
- Integral driver, isolated circuit



Dome LED Ceiling Fixture Selectable

Ordering Information:
DOM14-18LM35804-MSW

Shape	Dimension	- Lumens	CCT	CRI	Voltage	- Controls	- Finish
DOM	14 - 14"	- 18LM - 1740 Lumens	35 - 3500K 40 - 4000K	80 - 80Ra	4 - 120V	- MSW- Microwave Dimming Sensor ¹	- Blank - White

- Classic dome shaped lens design
- Microwave motion sensor available



Seletable Wall Mount Series





NAR LED Wall Pack

Ordering Information:
NAR-80SP-SW1-BK

Name	Watts	CCT	Voltage	Control	Finish
NAR	80SP - Selectable Power 80W/60W/40W ¹	SW - Selectable White 3000K/4000K/5000K ³	1-120-277V	Blank - None	BK- Black
	150SP - Selectable Power 150W/120W/100W ²			PC - Photocontrol	
				EBU - Emergency Battery Backup ⁴	* Custom finish colors will ask for additional charge.

- Wattage selectable
- CCT selectable
- Up to 20,000lm
- Motion sensor, photocontrol and emergency battery back-up optional



Selectable AKT LED Wall Pack

Ordering Information:
AKT-120SP-SW1-III-BK

Name	Watts	-CCT	Voltage	- Control	- Distribution	- Finish
AKT	24SP - 15/20/24W ¹ Selectable	SW - 3000/4000/5000K ⁵	1-120-277V	Blank - None	III - Type III	BK - Black
	42SP - 24/30/42W ² Selectable			PC - Photocontrol		Optional
	80SP - 50/60/80W ³ Selectable			MS - PIR Sensor ⁶		BZ - Bronze
	120SP - 80/100/120W ⁴ Selectable			EBU - Emergency Battery Backup ⁷		WH - White GY - Gray

- Cutoff distribution design
- Wattage and CCT selectable
- Lumen output is up to 16950lm
- Emergency back up, photocontrol and sensor available as option





PUS Selectable Classic LED Wall Pack

Ordering Information:
SCWP-SPS-SW1-PUS

Name	Watts	CCT	Voltage	Control	Finsh	Version
SCWP	SPS - Selectable Power 60W/80W/100W¹	SW - Selectable White 3500K/4000K/5000K²	1-120-277V	Blank - None PC - Button Photocontrol	Blank - Bronze	PUS
	SPL - Selectable Power /80W/100W/120W¹					

- Wattage selectable
- 3500K, 4000K and 5000K selectable
- Lumen output range from 7800lm to 15,600lm
- Button photocontrol available
- Tempered glass lens



Selectable Slim Wall Pack

Ordering Information:
SSWP-SPS-SW8-MSW

Name	Watts	- CCT	Voltage	- Control	- Finsh
SSWP	SPS - Selectable Power 20W/24W¹	- SW - Selectable White 3000K/4000K/5000K²	8-120-347V	Blank - None MSW - Microwave Dimming Sensor³ PC - Button Photocontrol⁴	Blank - Bronze
	SPL - Selectable Power 40W/60W/75W¹				

- Architectural low profile design
- 0-90 degree angle adjustable
- 3000K, 4000K and 5000K selectable
- Wattage selectable
- Die-cast aluminum housing
- Tempered glass lens
- Sensor is available



Selectable Flood Light Series





Selectable Mini Flood Light

Ordering Information:
SMFL30-SW1-KN

Name	Watts	- CCT	Voltage	- Controll	- Installation	- Distribution	- Finsh
SMFL	12 - 12 Watts	- SW - Selectable White 3000K/4000K/5000K¹	1-120-277V	- Blank - None PC - Button Photocell²	- KN- Knuckle TR- Trunion	- Blank- 7H x 6V	- Blank - Bronze
	30 - 30 Watts						
	50 - 50 Watts						

- Die-cast aluminum housing
- 3000K, 4000K and 5000K selectable
- High efficiency up to 152 LPW
- Various mounting brackets
- Silicon Gasket , IP65



HOLLY LED Flood Light

Ordering Information:
HOFL-C26301-24-CN-BK-1.8FT

Name	-Wattage	CCT	Voltage	-Beaming Angle	- Mounting	-Faceplate Finish	- Cable Length	-Option	
HOFL	C26 - 26W	27- 2700K	1- 120-277V	5 - 5°	CN - Canopy cover	BK - Black RAL9011	1.8FT* * 1.8 FT cable is standard. Other cable lengths are available at an additional charge	Blank - None	
	C42 - 42W	30- 3000K		15 - 15°					M - Marine
	C86 - 86W	40- 4000K		24 - 24°	KNR - Knuckle with 1/2 threaded receptacle	* Black (standard color) Other finish colors are available at an additional charge.			ambient corrosion resistance
	C120- 120W	50- 5000K		36 - 36° 50 - 50°					
					KNS - Knuckle with 1/2 threaded stem	WH- White RAL9016 GY - Gray RAL7012			
					YK - Yoke	BZ - Mineral bronze SL - Silver RAL9006			

- Heavy duty cast aluminum housing
- Tempered glass lens
- Multiple mounting mechanisms
- Various beaming angles
- Marine grade treatment available





HOLLY RGB LED Flood Light

Ordering Information:
HOFL-R26-RGBW3024V-DMX-24-CN-BK-1.8FT

Name	-Wattage	- CCT	Voltage	-Controls	-Beaming Angle	-Mounting	-Faceplate Finish	- Cable Length	-Option
HOFL	R26 -26W	RGBW30	24V-24VDC ¹	DMX DMX512 enabled	8 - 8° ²	CN - Canopy cover	BK - Black RAL9011	1.8FT*	Blank -None
	R42 -42W	- RGB and 3000K			15 - 15°	KNR - Knuckle with 1/2 threaded receptacle	* Black (standard color) Other finish colors are available at an additional charge.	* 1.8 FT cable is standard. Other cable lengths are available at an additional charge	M - Marine ambient corrosion resistance
		RGBW40			24 - 24°				
		- RGB and 4000K			40 - 40°				
	R80 -80W	RGBW50	1- 120-277V		60 - 60°	KNS - Knuckle with 1/2 threaded stem	WH - White RAL9016		
	R112-112W	- RGB and 5000K			15X30 - 30°x15°		GY - Gray RAL7012		
		RGBTW ²				YK- Yoke	BZ - Mineral bronze		
		- RGB and 2700K-6500K tunable					SL - Silver RAL9006		

- Heavy duty cast aluminum housing
- Tempered glass lens
- Multiple mounting mechanisms
- Various beaming angles
- Marine grade treatment available



Selectable Parking Garage and Canopy Series





OPAL Canopy Light

Ordering Information:
OCAN-80SP-SW8-SRP-BZ

Name	Watts	- CCT	Voltage	- Control	- Finish
OCAN	80SP - Selectable Power 45W/60W/80W ¹	SW - Selectable White 3000K/3500K/4000K ³	8-120-347V	SRP - With Sensor Receptacle	BZ - Bronze
	120SP - Selectable Power 80W/100W/120W ²				

- Die-cast aluminum housing
- 3000K, 3500K and 4000K selectable
- Wattage selectable
- Motion sensor available



SCAN2 Canopy Light

Ordering Information:
SCAN2-70SP-SW8-BZ

Name	Watts	- CCT	Voltage	- Control	- Finsh
SCAN2	70SP - Selectable Power 28W/40W/60W/70W ¹	SW - Selectable White 3000K/4000K/5000K ²	8-120-347V	Blank - None	BZ - Bronze
				MSW - Microwave Dimming Sensor ³	
				Order separately Emergency Battery Backup ⁴	

- Die-cast aluminum housing
- 3000K, 3500K and 4000K selectable
- Wattage selectable
- Emergency battery back-up and sensor available





Boon LED Canopy Light

Ordering Information:
BOCAN-60SP-SW8-WH

Series	Watts	CCT	Voltage	Controls	Finish
BOCAN	60SP-60W/45W/ 30W/18W selectable ¹	SW - 3000K/4000K 5000K Selectable ³	1 - 120-277V 8 - 120-347V	Blank - with sensor receptacle	WH - White (RAL9016)*
	100SP-100W/75W/ 50W/30W selectable ²				

- Wattage and CCT selectable
- Up to 164lm/W
- Uplight is standard, reduces cave effect
- Plug-and-play sensor available
- Surface and pendant stem mount
- IP65, IK08 rated



Selectable Canopy Light

Ordering Information:
SCAN2-70SP-SW8-BZ

Name	Watts	CCT	Voltage	Control	Finsh
SCAN	SPS - Selectable Power 28W/40W/60W ¹	- SW - Selectable White 3000K/4000K/5000K ²	8-120-347V	- Blank - None MSW - Microwave Dimming Sensor ³	- Blank - Bronze
	SPL - Selectable Power 70W/80W/90W ¹				

- High efficiency up to 163LPW
- Die-cast aluminum housing
- 3000K, 4000K and 5000K selectable
- Wattage selectable
- Wide voltage120-347V available
- Lumen output range from 4000lm to 13,200lm
- IK08 rated





SDKL LED Dock Light

Ordering Information:
SDKL-SP-SW1-BKT2-YL

Name	Watts	CCT	Voltage	Mounting Bracket	Finish
SDKL	SP- Selectable Power 30W/50W ¹	SW - Selectable White 3000K/4000K/5000K ²	1- 120-277V 6- 347/480V	BKT2 - Two-pole bracket	YL - Yellow ³

- Die-cast aluminum housing
- Wattage and CCT selectable
- High impact resistant
- Adjustable pole arms mount



Jelly Jar LED Vapor Proof Light

Ordering Information:
JJR20LEDSW1-CWM-GY

Series	Watts	Source Type	CCT	Voltage	- Installation	- Finish
JJR	20 -20 Watts	LED	SW -3000K/4000K 5000K Selectable ¹	1- 120-277VAC	CWM- Adjustable Bracket for Ceiling and Wall Mount	GY - Grey

- Die-cast aluminum housing
- 3000K/4000K/5000K selectable
- Ceiling and wall mount
- Tempered glass globe and wire guard



Selectable Vapor Tight Series



GEN.2 Selectable Vapor Tight

Ordering Information:
SVP2-12D-50SP-SW1

Name	Dimension	Dimmable	Watts	CCT	Voltage	Control
SVP2	06 - 2FT	D - 0-10V Dimmable	20 - 20W	SW - Selectable 3500K 4000K 5000K ³	1 - 120-277V ⁴	Blank - None
	12 - 4FT		50SP- Selectable 30W/40W/50W ¹		8 - 120-347V ⁴	MSW - Microwave Motion Sensor ⁵
	24 - 8FT		70SP- Selectable 50W/60W/70W ²			MSWB - Bluetooth Microwave Motion Sensor ⁶ EBU- Emergency Battery Back-up ⁷ * Optional Bluetooth PIR Motion Sensor needs to be bought separately and field installed.

- IP65 rated for wet location
- Length available in 2ft, 4ft and 8ft
- Wattage and CCT selectable
- Optional wired and wireless occupancy and daylight sensor
- Stainless steel latches



Selectable Vapor Tight Series

Ordering Information:
SVP12D-SP-SW1


Name	Dimension	Dimmable	Watts	CCT	Voltage	Control
SVP	06 - 2FT	D - 0-10V Dimmable	SP - Selectable Power 20W/25W/30W ¹	SW - Selectable White 3500K/4000K/5000K ²	1 - 120-277V	Blank - None
	12 - 4FT		SP - Selectable Power 34W/38W/45W ¹			EBU- Emergency Battery Back-up
	24 - 8FT		SP - Selectable Power 65W/75W/90W ¹			MSW - Microwave Motion Sensor ³

- IP65 rated for wet location
- Length available in 2ft, 4ft and 8ft
- Wattage and CCT selectable






Selectable Linear Series

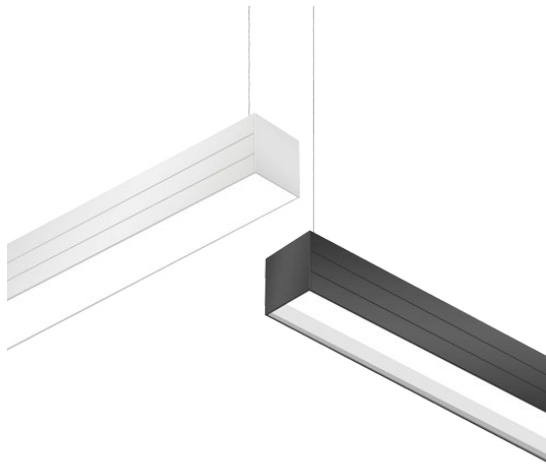

3.8 Inch Magic LED Linear Light

Ordering Information:
MAG1238-SW1-10D-PM-SD-FDL



1. Series

☒ MAG

2. Length

☐ 06 - 2FT ☐ 09 - 3FT ☐ 12 - 4FT ☐ 24 - 8FT

Option - Desired System Length*

* Individual fixtures, Runs and Configurations are supplied in nominal lengths to ensure full, even, illumination. If desired runs and configuratiuons are needed, please tell us the details in advance. Then we can prepare the middle run and end run in factory for easy installation, or end user need to modify the standard individual fixtures into middle run and end run.

3. Width

☐ 38- 3.8 Inch

4. Driver

☒ Blank - Integral

5. CCT

☐ SW- 3000K/3500K/4000K Selectable

1. Default setting is 3500K.

6. Voltage

☐ 1 - 120-277V

7. Dimming

☐ 10D - 0-10V, dim to 10% (Standard) ☐ 01D - 0-10V, dim to 1% (Optional)

8. Mounting Options

☐ PM - Suspended Mount

1. Please refer to the following accessory table to choose the right mounting kits.

9. Light Distribution

☒ SD -Following options available by dip switch

- 100% Uplight
- 10% down, 90% up
- 30% down, 70% up
- 50% down, 50% up
- 70% down, 30% up
- 90% down, 10% up
- 100% Downlight

1. Default setting is 100% downlight.

10. Lens Options

☐ FDL - Flush Diffused Lens ☐ RGL - Regressed

* If the joined length exceeds 8ft, only continous Roll-Out Lens can be used.

11. Finish

☐ Blank - White ☐ BK - Black

- Comes in lengths of 2', 3', 4', and 8'
- 7 Direct/Indirect lighting distributing options
- Available with several lit joiner accessories for unlimited lighting pattern design
- Flat lens and deep regressed lens options
- CCT & wattage adjustable, up to 1200lm/ft
- Microwave sensor and EBU are available





2.3 Inch Magic LED Linear

Ordering Information:
MAG1223-SW1-PSM-SD-FDL

MAG

-

-

-

1

2

3

45

6

7

8

9

1. Series

☒ MAG

2. Length

☐ 06 - 2FT ☐ 09 - 3FT ☐ 12 - 4FT ☐ 24 - 8FT

Option - Desired System Length*

* Individual fixtures, Runs and Configurations are supplied in nominal lengths to ensure full, even, illumination. If desired runs and configuratiouns are needed, please tell us the details in advance. Then we can prepare the middle run and end run in factory for easy installation, or end user need to modify the standard individual fixtures into middle run and end run.

3. Width

☐ 23- 2.3 Inch

4. Driver

☒ Blank - Integral

5. CCT

Selectable CCT

☐ SW - 3000K/3500K/4000K selectable

* 4000K is default setting.

Single CCT

☐ 30 - 3000K ☐ 35 - 3500K ☐ 40 - 4000K

* Single CCT is only for Micro Reflector.

6. Voltage

☐ 1 - 120-277V

7. Mounting Options

☐ PSM - Suspended¹

1. Please refer to the following accessory table to choose the right mounting kits.

8. Light Distribution

☒ SD -Following options available by dip switch

100% Uplight
10% down, 90% up
30% down, 70% up
50% down, 50% up
70% down, 30% up
90% down, 10% up
100% Downlight

1. Default setting is 100% downlight.

9. Lens Options

☐ FDL - Flush Diffused Lens ☐ RGL - Regressed
☐ LVL - Louver Lens ☐ **MRF - Micro Reflector**

* If the joined length exceeds 8ft, only continous Roll-Out Lens can be used.

* **MRF is only available in 4ft and single CCT.**

* RGL, LVL and MRF lens will ask long lead time for 2ft, 3ft and 8ft. Please check with Customer Service in advance.

10. Finish

☐ Blank - White ☐ BK - Black

- Comes in lengths of 2', 3', 4', and 8'
- Direct and indirect Available with several lit joiner accessories for unlimited lighting pattern design
- Professional lenses available in flush diffused, louver, micro reflector and regress lens
- Microwave sensor and EBU are available





MAGIC 1.8 LED Linear Light

Ordering Information:
MAG1218-SW1-PSM-SD-FDL

MAG1

21

8S

-

W

1

-

PSM

-

SD

-

FDL

-

1

2

3

4

5

6

7

8

9

10

1. Series

☒ MAG

2. Length

☐ 06 - 2FT ☐ 12 - 4FT ☐ 24 - 8FT

Option - Desired System Length*

* Individual fixtures, Runs and Configurations are supplied in nominal lengths to ensure full, even, illumination. If desired runs and configuratiouns are needed, please tell us the details in advance. Then we can prepare the middle run and end run in factory for easy installation, or end user need to modify the standard individual fixtures into middle run and end run.

3. Width

☐ 18 - 1.8 Inch

4. Driver

☒ Blank - Integral

5. CCT

☐ SW - 3000K/3500K/4000K selectable

* 4000K is default setting.

6. Voltage

☐ 1 - 120-277V

7. Mounting Options

☐ PSM - Suspended and Surface Mounted

☐ WM - Wall Mounted

* Please refer to the following accessory table to choose the right mounting kits.

8. Light Distribution

☐ SD - 2 Lighting Distribution By Dip Switch

☐ 25%Up/75% Down

☐ 100% Down

* 100% Down is default setting.

9. Lens Options

☐ FDL - Flush Diffused Lens

* If the joined length exceeds 8ft, only continous Roll-Out Lens can be used.

10. Finish

☐ Blank - White

☐ BK - Black

- Comes in lengths of 2', 4', and 8'
- 3000K, 3500K and 4000K selectable
- Wattage selectable
- Available with several lit joiner accessories for unlimited lighting pattern design
- Surface and pendant mount
- Microwave sensor and EBU are available





MAGIC 1.3 LED Linear Fixture

Ordering Information:
MAG1213-SW1-PSM-SD-FDL



1. Series

☒ MAG

2. Length

☐ 06 - 2FT ☐ 12 - 4FT ☐ 24 - 8FT

Option - Desired System Length*

* Individual fixtures, Runs and Configurations are supplied in nominal lengths to ensure full, even, illumination. If desired runs and configuratiuons are needed, please tell us the details in advance. Then we can prepare the middle run and end run in factory for easy installation, or end user need to modify the standard individual fixtures into middle run and end run.

3. Width

☒ 13 - 1.3 Inch

4. Driver

☒ Blank - Integral

5. CCT

Selectable CCT

☐ SW - 3000K/3500K/4000K selectable

* 4000K is default setting.

6. Voltage

☐ 1 - 120-277V

7. Mounting Options

☐ PSM - Suspended and Surface Mounted ☐ WM - Wall Mounted

* Please refer to the following accessory table to choose the right mounting kits.

8. Light Distribution

☐ SD - 2 Lighting Distribution By Dip Switch

☐ 25%Up/75% Down

☐ 100% Down

* 100% Down is default setting.

9. Lens Options

☐ FDL - Flush Diffused Lens ☐ DPL - Drop Lens

☐ LVL - Louver Lens

* Flush diffused lens is standard. Other lens require MOQ.

* If the joined length exceeds 8ft, only continuous Roll-Out Lens can be used.

10. Finish

☐ Blank - White

☐ BK - Black

- Comes in lengths of 2', 4', and 8'
- 2 lighting distributions by DIP switch
- CCT and wattage selectable
- Suspended, surface and wall mount available
- Microwave sensor and EBU are available





Jenn Frame LED Light


Ordering Information:
FRM22-40SP-SW1-JEN

Series	LengthV	Watts	CCT	Voltage	Series	Finish
FRM	22- 2x2 FT	40SP - 20W/30W/40W Selectable ¹	SW - 3000K/3500K/4000K 5000K/6500K selectable ²	1- 120-277V	JEN	Blank - White
	24 - 2x4 FT	54SP - 40W/50W/60W Selectable ¹				



Slender Linear Light

Ordering Information:
SLSM4-12SPSW1-SM



1. Series

☒ SLSM

2. Width

☐ 4 - 4 inch ☐ 6 - 6 inch

3. Length and Wattage

☐ 0620 - 2FT//20W¹ ☐ 12SP - 4FT/40W
Selectable²

1. 2FT is 20W, not selectable.
2. 50%/75%/100% selectable

4. CCT

☐ SW - 3000K / 3500K / 4000K Selectable

5. Voltage

☐ 1 - 120-277V

6. Driver

☐ Blank - 1-10V dimming driver

7. Mounting Options

☐ SM - Surface Mount

* Surface mount is standard. It is also suitable for standard T-grid ceiling recessed mount. If for dry ceiling recessed mount, please choose the right flange kits in the following accessory table.

8. Finish

☐ Blank - White

- Slim frame design
- CCT selectable
- Available in 2x2 and 2x4 sizes
- Milky Lens is standard



- Ultra thin profile, only 0.94” thickness
- Built-in driver
- Available in 4”, 6” width and 2’, 4’ length
- Wattage adjustable (50%/75%/100%)
- 3000K,3500K and 4000K selectable

Selectable Cylinder Series





MELO Cylinder Light

Ordering Information:
MELO04R-SP30901-10D-36-WH-WH

MELO

04

RS

-

P3

09

01

-

10D

1

2

3

45

6

7

8

-

36

-

WH

-

WH

9

10

11

1. Series

☒ MELO

2. Size

☐ 04 - 4inch ☐ 06 - 6inch ☐ 08 - 8inch

3. Shape

☐ R - Round

4. Power

☐ SP - Wattage Selectable
25W/18W/12W for 4inch
40W/30W/20W for 6inch
58W/44W/29W for 8inch

5. CCT

☐ 27 - 2700K ☐ 30 - 3000K
☐ 35 - 3500K ☐ 40 - 4000K

6. CRI

☐ 80 - 80+ CRI (Standard) ☐ 90 - 90+ CRI (Optional)

7. Voltage

☐ 1 - 120-277V

8. Dimming Options

☐ 10D - Dims to 10% (Standard) ☐ 01D - Dim to 1% (Optional)

☐ TRD - TRIAC Dimming (Optional)

9. Beam Angle

☐ 15 - 15° ☐ 24 - 24°
☐ 36 - 36° ☐ 60 - 60°

10. Baffle

☐ WH - White ☐ BK - Black
☐ GD - Golden ☐ CM - Chrome



11. Finish

☐ WH - White ☐ BK - Black

* White and black finish are standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

Installation (ordered separately)

FOR RECESSED JUNCTION BOX

☐ Surface Mount ☐ Aircraft cable pendant Mount
☐ Rigid stem pendant Mount

FOR SURFACE MOUNTED JUNCTION BOX

☐ Surface Mount ☐ Aircraft cable pendant Mount
☐ Rigid stem pendant Mount

* Please choose the desired mounting accessories in the following accessory table.

- Modular design
- COB LED chip: 80+ standard, 90+ optional
- Dimming: 0-10V(10% standard ,1% optional) or TRIAC
- Beam angle: 15°, 24°, 36°, 60° options
- Architectural form : 4”, 6” and 8”
- Mounting: Pendant or surface
- Wattage Selectable





Selectable Magic Cylinder Light

Ordering Information:
SMCL-25SP-SW904-36-PMK-MBK

Strip	-Watts	- CCT&CRI ¹	Voltage	- Beaming Angle ²	Installation ³	- Controls	- Finish
SMCL	25SP - 15/20/25W ¹ Selectable	SW90 - 3000/3500/4000K ³ Selectable, 90CRI	4-120V	15-15°	PMK - Pendant Mount	Blank- None	MBK - Matt Black
	35SP - 25/30/35W ² Selectable			24-24°	SMK - Surface Mount		MWH - Matt White
				36-36°	HTMK - H-type Track Mount		
				50-50°	JTMK - J-type Track Mount		
				HTPMK - H-type Track Pendant Mount			
				JTPMK - J-type Track Pendant Mount			

- 3000K-3500K-4000K 3CCT Selectable
- Wattage Selectable
- 4 beam angles:15°, 24°, 36°and 50°
- Integral driver, isolated circuit
- 360° rotation (horizontal), 90° adjustable (vertical)
- Anti-glare design to reduce glare light
- Track mount, surface mount and pendant mount available
- Sleek, compact cylinder housing and no visible screws



Selectable Suspended Series






Selectable Focus Round Light

Ordering Information:
FRSID24-64-SW801

Series	Distribution	Diameter/Watts	..CCT	CRI	Voltage	Installation	Controls	.. Finish
FR	SID - Direct and Indirect ¹	14-28 - 13.5"/28W ¹	SW - 3000K 3500K 4000K selectable ²	80- 80Ra ³	1-120-277V	Ordered and shipped separately ⁴	Blank-None	Blank -White
		18-42 - 17.4"/42W		90- 90Ra ³		ACPMK-FR		BK - Black
		24-64 - 23.3"/64W				Aircraft Cable Pendant Mount Kits		Optional Finish Colors (Need Additional Charge)*
		35-102 - 35.1"/102W				RPMK-FR		
		47-136 - 46.9"/136W ¹				Rod Pendant Mount Kits		
						SMK-FR		
						Surface Mount Kits		
						SMK-1/2KO-FR		
						Surface Mount Kits		

- Fixtures in diameters from 13.5" through 46.9"
- Recessed light source design achieving perfect glare control
- Edge-lit technology and non-yellowing optical PMMA
- Rod and Aircraft Cable Pendant mounted and surface mounted
- Direct and indirect light distributions
- Integrated driver design reduce the time to recess the driver into junction box
- 3000K, 3500K, 4000K selectable




Britube Linear Light

Ordering Information:
BIT12ID40SW1

Series	LengthV	Distribution	Watts	CCT	Voltage	..Installation	.. Controls	.. Finish
BIT	12- 4FT	D - Direct	40- 40W	SW- 3000K/3500K 4000K/5000K Selectable ¹	1- 120-277V ²	Blank - Pendant ³	Blank - None	Blank - White
	24- 8FT	ID - Indirect and Direct	80- 80W		8- 120-347V ²		MSW - Microwave Dimming Sensor ⁴	
							EBU - Emergency Battery Back-up ⁵	

- Aluminum base and frosted polycarbonate lens
- 3000K, 3500K, 4000K and 5000K are in one
- Direct and indirect distribution
- Sensor and emergency back-up optional
- Special end caps design for easy run mount





Vagary Pendant Light

Ordering Information:
VAGA12-SW1-PM-D-FDL

VAGA

-

-

-

-

-

1

2

3

45

6

7

8

9

1. Series

☒ VAGA

2. Size

☐ 12 - 4FT

3. Driver

☒ Blank - Integral

4. CCT

☐ SW - 3000K / 3500K / 4000K Selectable

5. Voltage

☐ 1 - 120-277V

6. Mounting Options

☐ PM - Pendant*

* Aircraft Cable pendant mount kits include dry ceiling and drop ceiling and they need to be bought separately. Please refer to the following accessory table to choose the right pendant mounting kits.

7. Light Distribution

☐ D - Direct

☐ ID - Indirect

* Direct distribution is standard.

8. Lens Options

☐ FDL - Flush Diffused Lens¹

☐ LVL - Louver Lens²

1. Flush Diffused Lens is standard.

2. Louver lens is only available for direct distribution.


9. Finish

☐ Blank - Silver

* Silver finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

- Sleek and elegant minimalist Design
- Wattage Selectable
- Transparent optic and edge-lit
- Integral driver, isolated circuit
- Seamless continuous row mount
- CCT selectable



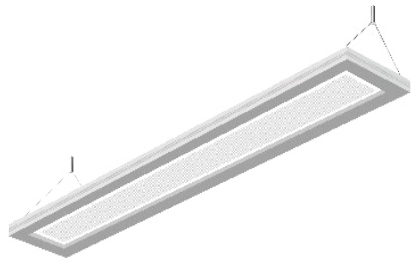

SLAB Light

Ordering Information:
SLAB04-SW1-PM

SLAB

45

1

2

3

45

6

7

1. Series

☒ SLAB

2. Size

☐ 04 - 8"x4' ☐ 08 - 8"x8'

Option - Desired System Length*

* If desired runs are needed, please tell us the details in advance. Then we can prepare the middle run and end run in factory for easy installation, or end user need to modify the standard individual fixtures into middle run and end run.

3. Driver

☒ Blank - Integral

4. CCT

☐ SW - 3000K / 3500K / 4000K Selectable

5. Voltage

☐ 1 - 120-277V

* 120-347V is available, please contact customer service for MOQ.

6. Mounting Options

☐ PM - Pendant*

* Aircraft pendant mount is standard. Pendant mount kits include dry ceiling and drop ceiling and they need to be bought separately. Please refer to the following accessory table to choose the right pendant mounting kits.

7. Finish

☐ Blank - White ☐ BK - Black

- Sleek and elegant minimalist Design
- 45% uplight and 55% downlight
- Transparent optic and edge-lit
- Integral driver, isolated circuit
- Seamless continuous run mount
- CCT selectable available



ARC Linear Pendant

Ordering Information:
ARC1260SW8-LV

Series	LengthV	Watts	CCT	oltage	_ Lens	_ Controls	_ Finish
ARC	12- 4FT	60 - 60W	SW- 3500K/4000K/ 5000K selectable	8- 120-347V	- LV - Louver NLV - No Louver	- Blank - None MSW - Microwave Dimming Sensor ¹ EBU - Emergency Battery Back-up ²	- Blank - White

- Aluminum louver and no louver design
- 3500K, 4000K and 5000K are in one
- Direct and indirect distribution
- Sensor and emergency back-up optional



Selectable Strip Series



ECO Selectable Slim Strip

Ordering Information:
SSTR-12D-40SP-SW8-SE

Slim Strip	Length	Dimmable	Watts	CCT	Voltage	Lighting Effect	Control	Series
SSTR	06- 2FT ¹	D - 0-10V Dimmable	20 - 20W	SW- 3000K 3500K 4000K selectable ⁵	8 -120-347V	Blank -130LPW P -150LPW	Blank- None MSW -Microwave Motion Sensor ⁶ EBU - Emergency Battery back-up ⁷	SE - ECO
	12- 4FT		40SP-20W/ 30W/40W selectable ²					
			50SP-30W/ 40W/50W selectable ³					
	24- 8FT		70SP-50W/ 60W/70W selectable ⁴					

- Wide voltage 120-347V
- CCT selectable (3000K, 3500K, 4000K in one)
- Wattage selectable
- Built-in motion sensor available
- Emergency batery back-up available



SSTRW LED Slim Strip(US Market Only)

Ordering Information:
SSTRW-12D-40SP-SW1

Slim Strip	Dimension	Dimmable	- Watts	- CCT	Voltage	- Control	Finish
SSTRW	06 - 2FT	D - 0-10V Dimmable	25SP - Selectable Power 15W/ 20W/25W ¹	SW - Selectable White 3500K/ 4000K/5000K ²	1-120 - 277V	Blank -None MSW -Microwave Motion Sensor EBU -Emergency Battery Back-up	Blank -White
	12 - 4FT		40SP - Selectable Power 25W/ 30W/40W ¹				
	24 - 8FT		65SP - Selectable Power 55W/ 60/65W ¹				

- CCT selectable (3500K, 4000K, 5000K in one)
- Wattage selectable
- Emergency battery back up optional
- Microwave motion sensor available
- Buckle design,Convenient disassembly and assembly





Selectable ECO Vision Strip Light

Ordering Information:
STR12DSP1LED8F-SE

Name	Dimension	Dimmable	atts	LED	CCT	Voltage	Lens	Controls	Series
STR	12 - 4FT	D - 0-10V Dimmable	SP1 - Selectable Power 32W/37W/47W ¹	LED	SW - Selectable White 3000K/3500K/4000K ²	8- 120-347V	F-Frosted lens ³	Blank - None MSW-Microwave Dimming sensor ⁴	SE - ECO
	24 - 8FT		SP2 - Selectable Power 55W/63W/80W ¹						

- 3000K, 3500K and 4000K selectable
- Wattage selectable
- 8% up-light and no glare
- Quick and Easy to wire and install
- Built-in sensor
- Ceiling & wall surface mounted, suspension mounted



GEN3 CCT/Wattage Selectable Slim strip Light

Ordering Information:
STR12DSP1LED8F-SE

Slim Strip	Dimension	Dimmable	Watts	CCT	Voltage	Lighting Effect	Control
SSTR	12 - 4FT	D - 0-10V Dimmable	SP1 - Selectable Power 40W/32W/28W ¹	SW - Selectable White 3000K/3500K/4000K ²	8-120 - 347V	Blank -130LPW P -150LPW ³	-MSW-Microwave Motion Sensor ⁴
	24 - 8FT		SP2 - Selectable Power 62W/50/43W ¹				

- 3000K, 3500K and 4000K selectable
- Wattage selectable
- 8% up-light and no glare
- Quick and Easy to wire and install
- Built-in sensor
- Ceiling & wall surface mounted, suspension mounted



Selectable Downlight Series






2 in ADJ PORLA LED Downlight

Ordering Information:
POR02-ADJ-R-10LM-90-MBK

SERIES	SIZE	ADJUSTABLE	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR	02 - 2"	ADJ - Adjustable	R - Round	06LM-90- 600lm/90CRI 10LM-90- 1000lm/90CRI	MWH - Matte White MBK - Matte Black	POR02-ADJ-08W-4 - 600lm Triac Dimmable Driver POR02-DL/ADJ-08W-1 - 600lm 0-10V Dimmable Driver POR02-ADJ-12W-4 - 1000lm Triac Dimmable Driver POR02-ADJ-12W-1- 1000lm 0-10V Dimmable Driver



2 in PORLA LED Downlight

Ordering Information:
POR02-DLR-10LM-90-MBK

SERIES	SIZE	DOWNLIGHT	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR	02 - 2"	DL - Downlight	R - Round S - Square	06LM-90- 600lm/90CRI 10LM-90- 1000lm/90CRI	MWH - Matte White MBK - Matte Black	POR02-08W-4 - 600lm Triac Dimmable Driver POR02-DL/ADJ-08W-1- 600lm 0-10V Dimmable Driver POR02-12W-4 - 1000lm Triac Dimmable Driver POR02-12W-1 - 1000lm 0-10V Dimmable Driver

- Five CCT selectable
- Type IC rated-no housing needed
- Aluminum construction
- Head is adjustable
- FT6 cable is standard

- 2" comes in round and square shapes
- Five CCT selectable
- Type IC rated-no housing needed
- Aluminum construction
- Head is adjustable
- FT6 cable is standard





4 in PORLA LED Downlight 600lm/1000lm

Ordering Information:
POR04-DLR-10LM-90-MBK

SERIES	SIZE	DOWNLIGHT / ADJUSTABLE	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR	04- 4"	DL - Downlight	R - Round	06LM-90 - 600lm/90CRI	MWH - Matte White	POR04-08W-4 - 600lm Triac Dimmable Driver POR04-08W-1 - 600lm 0-10V Dimmable Driver POR04-12W-4 - 1000lm Triac Dimmable Driver POR04-12W-1 - 1000lm 0-10V Dimmable Driver
			S - Square	10LM-90 - 1000lm/90CRI	MBK - Matte Black	
POR	04- 4"	ADJ - Adjustable	R - Round	06LM-90 - 600lm/90CRI	MWH - Matte White	
			S - Square	10LM-90 - 1000lm/90CRI	MBK - Matte Black	



4 in PORLA LED Downlight 1500/2000lm

Ordering Information:
POR04-DLR-15LM-90-MBK

SERIES	SIZE	DOWNLIGHT	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR	04- 4"	DL - Downlight	R - Round	15LM-90 - 1500lm/90CRI	MWH - Matte White	POR04-18W-4 - 1500lm Triac Dimmable Driver POR04-18W-1 - 1500lm 0-10V Dimmable Driver POR04-25W-4 - 2000lm Triac Dimmable Driver POR04-25W-1 - 2000lm 0-10V Dimmable Driver
			S - Square	20LM-90 - 2000lm/90CRI	MBK - Matte Black	
POR	04- 4"	ADJ - Adjustable	R - Round	15LM-90 - 1500lm/90CRI	MWH - Matte White	
			S - Square	20LM-90 - 2000lm/90CRI	MBK - Matte Black	

- 4” comes in round and square shapes
- Five CCT selectable
- Type IC rated-no housing needed
- Aluminum construction
- Adjustable and fixed head available
- FT6 cable is standard



- 4” comes in round and square shapes
- Five CCT selectable
- Aluminum construction
- FT6 cable is standard



4 in ADJ PORLA LED Downlight

Ordering Information:
POR04-ADJ-R-15LM-90-MWH

SERIES	SIZE	ADJUSTABLE	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR	04- 4"	ADJ - Adjustable	R - Round	15LM-90- 1500lm/90CRI	MWH - Matte White MBK - Matte Black	POR04-18W-4 - 1500lm Triac Dimmable Driver POR04-18W-1 - 1500lm 0-10V Dimmable Driver

- Five CCT selectable
- Type IC rated-no housing needed
- Aluminum construction
- Head is adjustable
- FT6 cable is standard




ADJ30 4 in PORLA LED Downlight 650LM & 1100LM

Ordering Information:
POR04-G2-ADJ30-R-11LM-90-MWH

SERIESS	IZE	GENERATION	DOWNLIGHT / ADJUSTABLE	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR0	4- 4"	G2 - Generation 2	ADJ30 - Adjustable Tilt 30°	R - Round	65LM-90 - 650lm/90CRI 11LM-90 - 1100lm/90CRI	MWH - Matte White MBK - Matte Black	POR04-ADJ30-09W-4 9W Triac Dimmable Driver for 650lm POR04-ADJ30-13W-4 13W Triac Dimmable Driver for 1100lm POR04-ADJ30-13W-1 13W 0-10V Dimmable Driver for 1100lm

- 30° tilt angle
- Five CCT selectable
- Type IC rated-no housing needed
- Aluminum construction



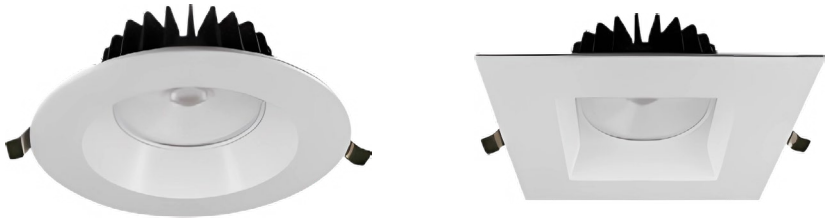

6 in PORLA LED Downlight 1800LM

Ordering Information:
POR06-DLR-18LM-90-MBK

SERIES	SIZE	DOWNLIGHT	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR	06- 6"	DL - Downlight	R - Round S - Square	18LM-90 - 1800lm/90CRI	MWH - Matte White MBK - Matte Black	POR-24W-4 - Triac Dimmable Driver POR-24W-1 - 0-10V Dimmable Driver



6 in ADJ PORLA LED Downlight 1500LM

Ordering Information:
POR06-DLR-18LM-90-MBK

SERIES	SIZE	ADJUSTABLE	SHAPE	LUMENS/CRI	TRIM FINISH	DRIVER
POR	06- 6"	ADJ - Adjustable	R - Round	15LM-90 - 1500lm /90CRI	MWH - Matte White MBK - Matte Black	POR04-18W-4 - 1500lm Triac Dimmable Driver POR04-18W-1 - 1500lm 0-10V Dimmable Driver

- 6” comes in round and square shapes
- Five CCT selectable
- Aluminum construction
- FT6 cable is standard

- Five CCT selectable
- Type IC rated-no housing needed
- Aluminum construction
- Head is adjustable





NOVA LED Downlight

Ordering Information:
NOVA-20SPSW8

1. Series

☐ NOVA

2. Wattage

☐ 20SP - 10W/15W/20W Selectable

☐ 40SP - 27W/34W/40W Selectable

* 20W and 40W are default setting.

3. CCT

☐ SW - 3000K / 3500K / 4000K Selectable

* 3000K is default setting.

4. Voltage

☐ 8 - 120-347V

OPTIONAL ORDERING GUIDE

Trim Shape

- ☐ Round Trim
- ☐ Square Trim
- ☐ White Ring
- ☐ Round Wall Wash Trim
- ☐ Metal Ring
- ☐ Square Wall Wash Trim
- ☐ Rose Trim

* Different trims need to be bought separately and field installed.
More details are in the following accessory table.

- 4”, 6”, 8” and 10” trim size options
- Various changable trim design
- Available in round, square, round wall wash and square wall wash trims
- Twist-lock modular design
- Integrated J-box for direct wire, eliminated recessed can
- CCT and Wattage selectable
- New construction frame kit available



TRIO LED Downlight

Ordering Information:
TRIO-4R-09SW804-WH

SERIES	SIZE	SHAPE	WATTS	CCT	CRI	VOLTAGE	TRIM FINISH²
TRIO	4 - 4"	R - Round	09 - 9W	SW - Selectable White 2700K/ 3000K/3500K/ 4000K/5000K¹	80 - 80 CRI	4 - 120V	WH - White

- Mount to 4” Junction box directly
- Type IC and Non-IC housing retrofit
- Three magnetic faceplates standard
- 5%-100% triac dimmable
- 5 CCT selectable
- Built-in 120V on board LED driver





4” NINO ADJ LED Downlight

Ordering Information:
NINO04-ADJ-R-07LM-90-MWH

SERIESS	Size	ADJUSTABLES	HAPE	LUMENS/CRI	TRIM FINISH	DRIVER
NINO	04- 4"	ADJ - Adjustable	R - Round	07LM-90 - 700Lm /90CRI	MWH - Matte White MBK - Matte Black	NINO04-09W-4 - 9W Triac Dimmable Driver

- Five CCT selectable
- 1 3/8” Deep - Fits in 1” ceiling space
- Type IC rated-no housing needed
- Aluminum construction
- Head is adjustable



4” NINO ADJ LED Downlight

Ordering Information:
WAF04-DLR-08LM-90-MWH

SERIES	SIZE	DOWNLIGHT / ADJUSTABLE	SHAPEL	UMENS/CRI	TRIM FINISH	DRIVER
WAF	04- 4"	DL - Downlight	R - Round	08LM-90 - 800Lm /90CRI	MWH - Matte White MBK - Matte Black	WAF04-12W-4 - 12W Triac Dimmable Driver

- Edge-lit technology, even illuminations
- 5 CCT selectable
- 2 hour fire rated
- Type IC rated





Selectable Highbays Series



NLHB Linear High Bay

Ordering Information:
NLHB-300SP-SW1-G-PFL-WH

Series	- Watts	- CCT	Voltage	- Controls	--Distribution	LENS	-Finish
NLHB	100SP -100W selectable ¹	SW - 3000K 4000K 5000K selectable ²	1-120-277V	Blank - None MS - With Sensor Receptacle ³	G -General	PFL - Polycarbonate Frosted Lens	WH - White * Custom colors will ask for additional charge.
	150SP -150W selectable ¹						
	200SP -200W selectable ¹						
	240SP -240W selectable ¹						
	300SP -300W selectable ¹						
	400SP -400W selectable ¹						

- Lumen range from 14,000lm to 54,000lm
- Extruded aluminum heat sinks
- 3000K, 4000K and 5000K selectable
- Wattage selectable
- Motion sensor and emergency battery back-up are available




GEN.4 LED Linear High Bay

Ordering Information:
LHBG4-19-200SP-SW1-G-WH


Series	- Length	- Watts	- CCT	Voltage	- Controls	- Distribution	- Finish
LHBG4	14-1.4FT	135SP -100/115/135W ¹ Selectable	SW - 4000K/5000K selectable ²	1-120-277V	Blank - with Sensor Receptacle	G - General 90°x95°	WH -White
	19-1.9FT	200SP -155/185/200W ¹ Selectable			Order and ship separately		
	26- 2.6FT	270SP -200/230/270W ¹ Selectable			BMS-S6-PIR-DC1- BLE-SR-PPM Bluetooth PIR Motion Sensor		
	37- 3.7FT	400SP -270/340/400W ¹ Selectable			BMS-S6-PIR-DC1-PPM PIR Motion Sensor		

- Lumen output is up to 56,000lm
- Lengths available in 1.4ft, 1.9ft, 2.6ft and 3.7ft.
- 4000K and 5000K selectable
- Plug and play bi-level motion sensor availabler

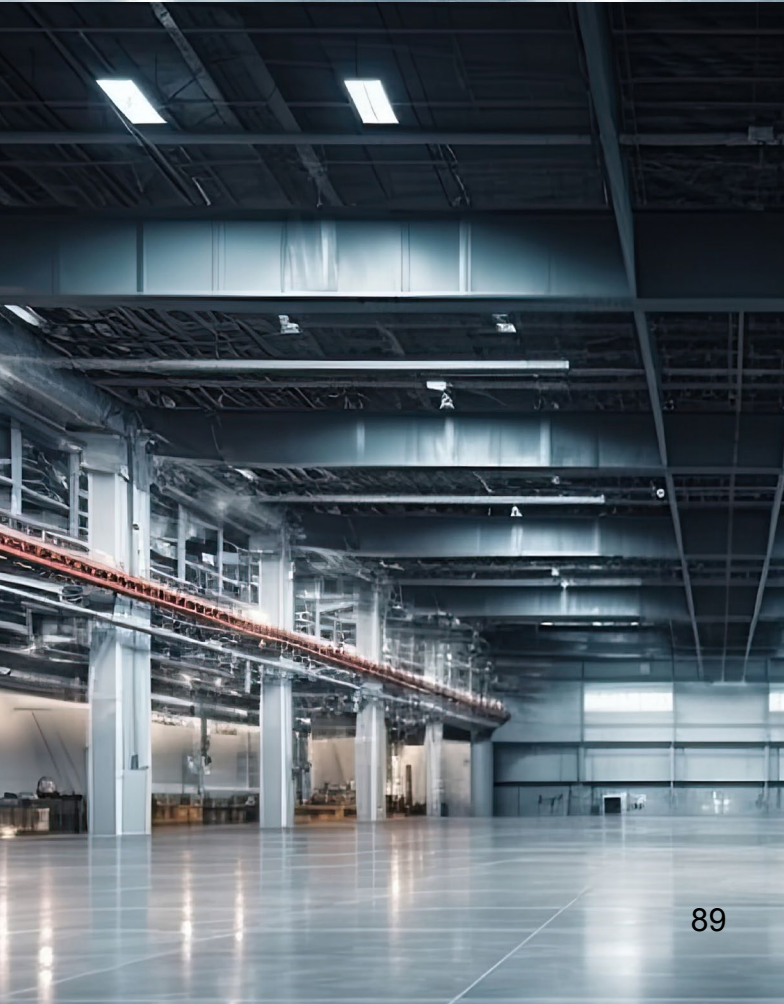



Selectable Troffers & Panels Series

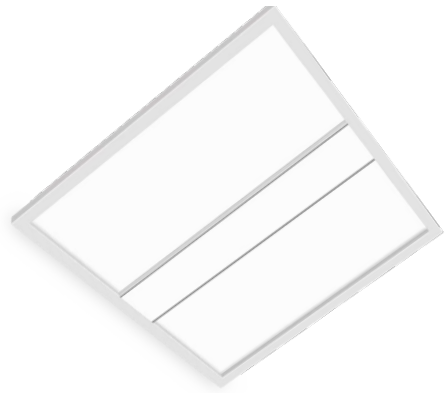

Horizon Architecture Troffer

Ordering Information:
HOTR-22D-35SP-SW1

Name	Size	Dimmable	Watts	CCT	Voltage	Control
HOTR	22-2x2 FT	D - 0-10V Dimmable	35SP - 35W/30W/25W ¹ Selectable	SW - 3500K/4000K/5000K Selectable ³	1- 120-277V	Blank - None
	14-1x4 FT		35SP - 35W/30W/25W ¹ Selectable			SRP - Sensor Receptacle ⁴
	24-2x4 FT		50SP - 30W/40W/50W ¹ Selectable			

- Uniform and soft illumination
- 3500K,4000K and 5000K selectable
- Wattage selectable, up to 120lm/W
- Sensor and emergency battery back-up available



Curve Architecture Troffer

Ordering Information:
CVTR-22D-40SP-SW1

Name	Size	Dimmable	Watts	CCT	Voltage	Control
CVTR	22-2x2 FT	D - 0-10V Dimmable	40SP - 25W/30W/40W ¹ Selectable	SW - 3500K/4000K/5000K Selectable ³	1- 120-277V ⁴	Blank - None
	14-1x4 FT		40SP - 25W/30W/40W ¹ Selectable		8- 120-347V ⁴	EBU-Emergency Battery Backup ⁵
	24-2x4 FT		50SP - 30W/40W/50W ² Selectable			

- Curved luminous surface
- Wattage and CCT selectable
- Comfortable and soft distribution





Latitude Architecture Troffer

Ordering Information:
LATR-22D-40SP-SW1

Name	- Size	Dimmable	- Watts	- CCT	Voltage	Control	- Options
LATR	22-2x2 FT	D - 0-10V Dimmable	40SP - 24W/35W/40W ¹ Selectable	SW - 3000K/3500K 4000K/5000K ⁴ Selectable	1- 120-277V	Blank - None MS - PIR sensor EBU-Emergency Battery Backup	Blank - None RS - Red Strip ⁵ GS - Green Strip ⁵ BS - Blue Strip ⁵
	14-1x4 FT		40SP - 24W/35W/40W ¹ Selectable				
	24-2x4 FT		50SP - 30W/35W 40W/50W ² Selectable 72SP - 50W/60W/72W ³ Selectable				

- Vertical light guide plate design
- Wattage and CCT selectable
- Decorative color strip option available
- Internal motion sensor available
- Emergency back up optional



Selectable Sensor Based Troffer

Ordering Information:
TRSB-24D-SP1-SW1

Name	- Size	Dimmable	- Watts	- CCT	Voltage	-Control	- Finish
TRSB	22-2x2 FT	D - 0-10V Dimmable	SP1 - Selectable Power 20W/25W/30W ¹	SW - Selectable White 3500K/ 4000K/5000K ³	1- 120-277V	Blank- With Sensor Receptacle EBU-Emergency Battery Backup ⁴	Blank-White
	14-1x4 FT		SP1 - Selectable Power 20W/25W/30W ¹				
	24-2x4 FT		SP1 - Selectable Power 34W38W/45W ²				

- Color temperature selectable
- Wattage selectable
- Ocupancy sensor ready
- Emergency back up optional





Selectable Sensor Based Back-Lit Flat Panel

Ordering Information:
SSBFLP24D-30SP-SW1

Name	Dimension	Dimmable	- Watts	- CCT	Voltage	- Control
SSBFLP	22 - 2x2'	D- 1-10V dimming	30SP - Selectable Power 20W/25W/30W ¹		1- 120-277V	Blank - With Sensor Receptacle ⁴
	14 - 1x4'		30SP - Selectable Power 20W/25W/30W ¹			EBU - Emergency Back-up
	24 - 2x4'		46SP - Selectable Power 35W/40W/46W ²			

- Wattage and CCT selectable
- Plug and play occupancy and bluetooth sensor
- No LGP, never yellowing
- High efficacy up to 133lm/w, meet DLC 5.1 premium version



Selectable Back-Lit Flat Panel

Ordering Information:
SSBFLP24D-30SP-SW1

Name	Dimension	Dimmable	- Watts	- CCT	Voltage	- LPW	- Control
SBFLP	22 - 2x2'	D- 1-10V dimming	SP1 - Selectable Power 25W/30W/40W ¹	SW - Selectable White 3500K/4000K/5000K ³	8- 120-347V	P- Premium	Blank - None EBU - Emergency Back-up ⁴
	14 - 1x4'		SP1 - Selectable Power 25W/30W/40W ¹				
	24 - 2x4'		SP2 - Selectable Power 30W/40W/50W ²				

- Wattage and CCT selectable
- 120-347V available
- No LGP, never yellowing
- High efficacy up to 125lm/w, meet DLC 5.1 premium version





Selectable Wrap and Tube Series



WWRP LED Wraparound Light

Ordering Information:
WWRP12D-SP-SW1

Name	Dimension	Dimmable	Watts	CCT	Voltage	Control
WWRP	12 - 4FT	D - 0-10V Dimmable	SP - Selectable Power 30W/35W/40W ¹	SW - Selectable White 3500K/4000K/5000K ²	1 - 120-277V	Blank - None EBU - Emergency battery backup ³ MSW - Microwave Dimming Sensor ⁴ Bluetooth Sensor ⁵

- Simple sheet iron design
- Wide and tree-side optical lens
- Wattage and CCT selectable
- Wired and wireless sensors available
- DLC 5.1 listed



Dual Type A+B LED T8 Tube

Ordering Information:
T818SWAB-FW12-GL

Tube	Watts	CCT	Voltage Type	Lens Type	Length	Glass Type
T8	18 -18W	SW- 3000K 3500K 4000K 5000K 6500K Selectable	AB -120-347V or Ballast compatible	FW- Frost White	12 - 4 FT	GL - Glass

- 5CCT selectable
- 120-347VAC wiring directly
- Ballast compatible





ABOVE ALL Lighting, Inc.



1135 Thomas Busch Highway,
Pennsauken, NJ 08110



11331 Coppersmith Way,
Richmond, BC, V7A 5J9



866-222-8866



info@abovealllighting.com



www.AboveAllLighting.com

©2025 ABOVE ALL all rights reserved