

CYLINDER LED WALL LIGHT

Direct Light



The Cylinder Wall Light is designed in a cylinder shape with durable powder coat paint. It combines aluminum structure with a tempered glass diffuser radiating light downward against the wall where installed.

TECHNICAL DATA


| | |
|--------------------|-------------------------------|
| Wattage | 9W |
| CCT | 3000K |
| Dimming | Non-Dimming |
| CRI | 80 |
| Input Voltage | 120V, 50/60Hz |
| Projected Lifetime | L70-100,000 Hours |
| Operating Temp. | -13°F to 95°F (-25°C to 35°C) |
| Certifications | ETL listed |
| | Suitable for wet locations |
| | RoHS compliant |
| Power Factor | >0.87 |

CYLINDER LED WALL LIGHT

Direct Light

SPECIFICATION

Dimension

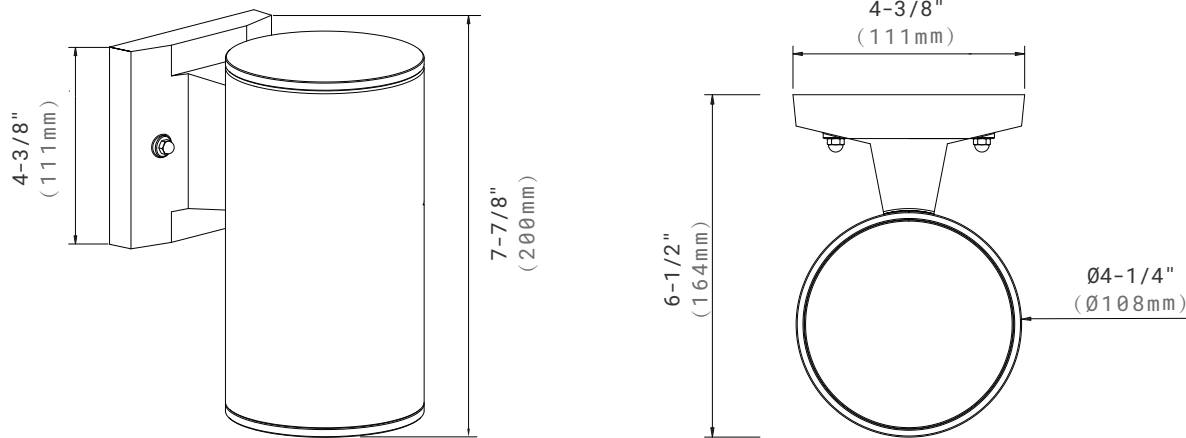

ORDERING INFORMATION

EXAMPLE:CRD09304-BK

| Model | Wattage | CCT | Voltage | Controls | Finish |
|---------------------------------|----------|-------------|-----------|-----------------|---------------------------------------|
| CRD Cylinder Round Direct | 09 9W | 30 3000K | 4 120V | BLANK On/Off | BK ¹ Black ¹ |

NOTE:

1.

Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
2.

Minimum order required, please contact Customer Service for additional information.

PERFORMANCE DATA


Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

| Wattage | Lumen Output | AC Input 120V | CCT | CRI |
|---------|--------------|------------------|-------|-----|
| 9W | 770lm | 0.08A | 3000K | 80 |

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

Ref#: 20250616

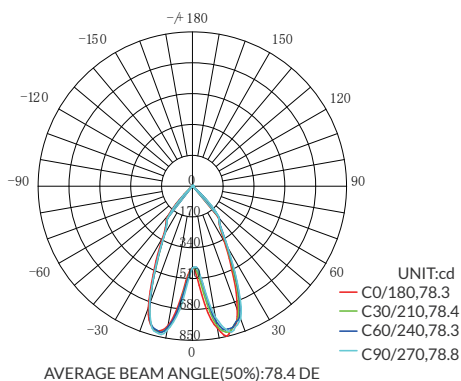

WARRANTY

2 year limited warranty.

Specifications subject to change without notice.