



The Mini Carlo Accent Light is a compact, versatile LED fixture for precise illumination. Its slim profile allows it to blend seamlessly into any environment. Its 360° rotation and 180° tilt ensure exceptional positioning flexibility, while optional retractable shrouds and extended brackets allow broader vertical surface coverage. Available in multiple beam patterns and power options, it delivers controlled lighting for various applications with minimal spill.

TECHNICAL DATA

Wattage	3W, 3W*2
CCT	2700K, 3000K, 4000K, 5000K
Beam Angle	15°/25°/30°/H30°*V15°
CRI	80
Input Voltage	120-277V/AC, 50/60Hz
Projected Lifetime	L70-100,000 hours
Operating Temp.	-40°F to 113°F (-40°C to 45°C)
Certifications	cETLus
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	65

FEATURES

- Adjustability & Adaptability:** Selection of beam angles and mountings. 360° rotatable and 180° tiltable.
- Durable Construction:** Die-cast aluminum housing. Polycarbonate Lens. Marine grade treatment available.
- Visual Comfort Optimization:** Optional shrouds for visual comfort.


SPECIFICATION

Dimension


3W



Angled Retractable Shroud



3W*2

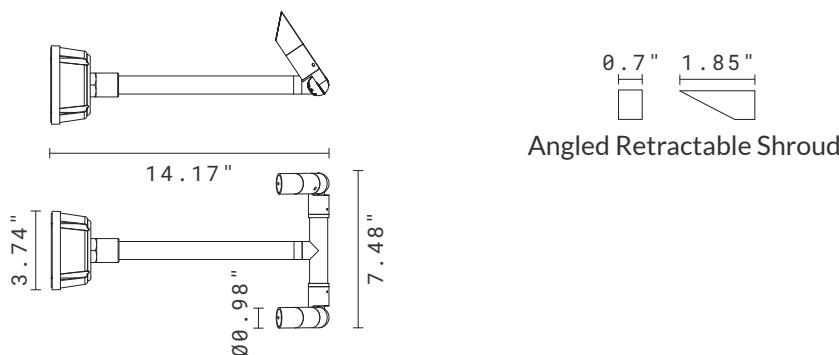

MOUNTINGS



Canopy Cover



Canopy with extended arm




Ground stake



Tree strap

ORDERING INFORMATION

EXAMPLE: CARLO-C03301-30-CN-AS-BK-1.8FT

CARLO										
Series	Wattage	CCT	Voltage	Beam Angle	Mounting	Shroud	Housing Color	Cable Length	Option	
CARLO	C03 3W	27 2700K	1 120-277	15 15°	CN Canopy	NS No shroud	BK ¹ Black	1.8FT ² 1.8ft cable	BLANK	
		30 3000K	V/AC	25 25°	Cover	AS Angled	RAL9011 <i>Black is the standard</i>	<i>is the</i>	None	
		40 4000K		30 30°	Ground Mount 	Retractable	<i>standard cable length.</i>	<i>standard</i>	M	
		50 5000K		3515 H35°V15°	Wall Mount 	Shroud	<i>housing color.</i>	<i>cable length.</i>	Marine	
							<i>Custom colors are available at an additional charge.</i>	<i>Custom lengths are available at an additional charge.</i>	ambient corrosion resistance	
							WH			
							White			
							RAL9016			
							GY			
							Gray			
C3x2 3W*2	27 2700K	1 120-277	15 15°	15 15°	EAR Extended Arm		RAL7012			
		30 3000K	V/AC	25 25°			BZ			
		40 4000K		30 30°			Mineral			
		50 5000K		3515 H35°V15°			Bronze			
							SL			
							Silver			
							RAL9006			

NOTE:

1. The standard finish color is black. Custom colors are available at an additional charge.
2. The standard cable length is 1.8ft. Custom cable lengths are available at an additional charge.

Shrouds



No Shroud



Angled Retractable Shroud

Housing Color



Black RAL9011



White RAL9016



Gray RAL7012



Mineral Bronze



Silver RAL9006

ACCESSORIES (ORDERED SEPARATELY)



HOFL-GDSK-AL

Aluminum Ground stake,
Max loading \leq 10kg,
Incapable in corrosive area.



HOFL-TRSP

Tree Strap,
Clamping area \varnothing 5.9" ~ 11.9".

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNALM-79-08 as well as Lighting Facts listed.

WATTAGE	BEAM ANGLE	LUMENS (lm)	CCT	CRI
3W	15°	46lm	3000K	80
3W	25°	50lm	3000K	80
3W*2	15°	82lm	3000K	80
3W*2	25°	100lm	3000K	80
3W*2	30°	114lm	3000K	80
3W*2	H35° x V15°	94lm	3000K	80

WARRANTY

Five year limited warranty.

Specifications subject to change without notice.