



The VENUS LED Bollard has sleek and slim shape. It has fully shielded light distribution. This bollard has UV powder coated die cast high quality aluminum body, moulded silicone gasket and stainless steel screws. This bollard is an excellent choice for walkways, entrances, plazas, court-yards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

| | |
|---------------------|--------------------------------|
| Wattage | 10W single head |
| CCT | 3000K, 4000K |
| Dimming | Non-Dimming |
| CRI | 80 |
| Input Voltage | 120-277V, 50/60Hz |
| Projected Lifetime | L70-100,000 Hours |
| Operating Temp. | -22°F to 104°F (-30°C to 40°C) |
| Certifications | cETL listed |
| | RoHS compliant |
| Power Factor | >0.9 @120Vac |
| Harmonic Distortion | <20% at full load |
| IP Rating | IP65 |


FEATURES

- Die cast aluminum body.
- Fully shielded light distribution.
- IP65 rated for wet location.


SPECIFICATION

Dimension


Side View

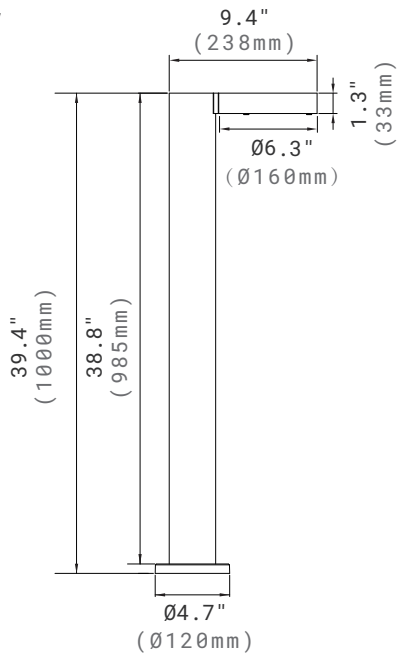

Base Plate

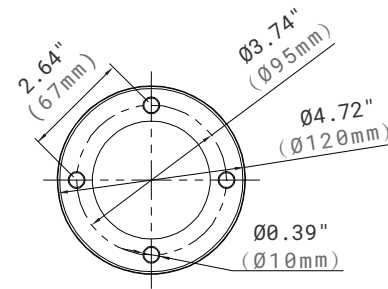


Anchor Bolts

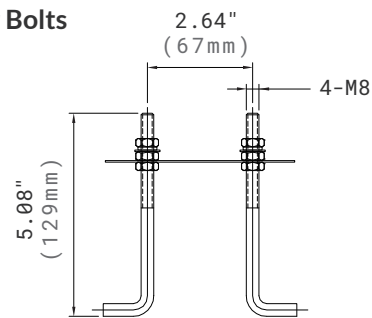

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

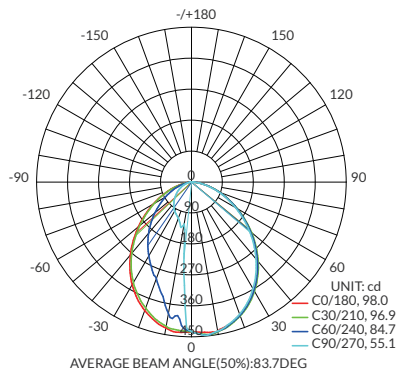

ORDERING INFORMATION

EXAMPLE: VSBD40H-10S401-BK

| VSBD | | | | | | |
|-----------------------|------------------------|---------------------------|----------------------------|---------------|-----------------|---|
| Name | Height | Wattage | CCT | Voltage | Controls | Finish |
| VSBD Venus Bollard | 40H 39.4" Height | 10S 10W Single Head | 30 3000K 40 4000K | 1 120-277V | BLANK On/Off | BK ¹ Black Optionoal Finish Colors (Additional Charge applied) ¹ |

NOTE:

1. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

ACCESSORIES(ORDERED SEPARATELY)



91415
ABMK-VSBD
 Anchor Bolts Mounting Kits.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

| Wattage | Lumen Output | AC Input 120V | CRI | CCT |
|---------|--------------|------------------|-----|-------|
| 10W | 900lm | 0.08A | 80 | 4000K |

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

| Model | BUG Rating |
|-------------------|------------|
| VSBD40H-10S301-BK | B1-U0-G0 |

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.