



The PUS Selectable Classic LED Wall Pack offers a traditional appearance and is powered by advanced LEDs, featured by wattage and CCT selectable. The Selectable Classic LED Wall Pack is powerful yet energy efficient, with lumen output from 7800lm to 15,600lm, capable of replacing a 400W metal halide luminaire easily. The selectable classic led wall pack not only is suitable for entryway/pathway lighting with 8" to 15" mounting heights but also suitable for area/perimeter lighting up to 25" mounting heights.

TECHNICAL DATA


Wattage	Selectable 60W/80W/100W
	Selectable 80W/100W/120W
CCT	Selectable White
	3500K/4000K/5000K
Driver	0-10V Dimming is standard
CRI	70 is standard
	80 is optional
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-40°F to 104°F (-40°C to 40°C)
Certifications	cUL listed
	DLC 5.1 Premium listed
	RoHS compliant
	Suitable for wet location
	Sale in US only
Power Factor	>0.9
Harmonic Distortion	<20% at full load

FEATURES

- Wattage and CCT selectable.
- Lumen output range from 7800lm to 15,600lm.
- Button photocontrol available.
- Tempered glass lens.

SPECIFICATION

Dimension

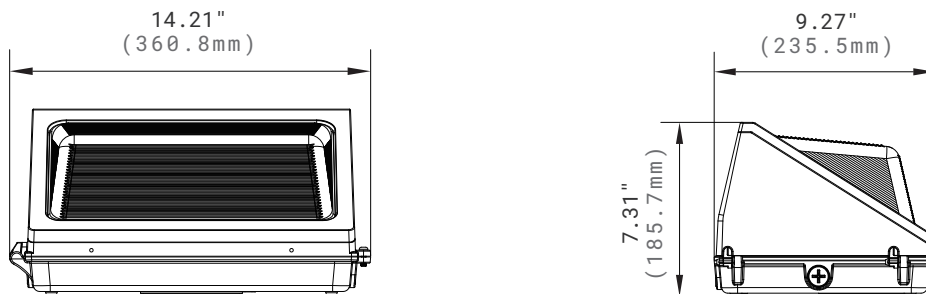

ORDERING INFORMATION

EXAMPLE: SCWP-SPS-SW1-PUS

SCWP						
Series	Wattage	CCT	Voltage	Control	Finish	Version
SCWP	SPS¹ Selectable 60W 80W 100W ¹ SPL¹ Selectable 80W 100W 120W ¹	SW² Selectable White 3500K 4000K ² 5000K	1 120V-277V	BLANK On/Off PC Button Photocontrol	BLANK³ Bronze ³	PUS

NOTE:

1. SPS @100W and SPL @120W are default setting, if need other wattage, please contact Customer Service in advance to change the setting in factory or change the setting in the field.
2. 4000K is default setting. If need other CCT please contact Customer Service in advance to change the setting in factory or change the setting in the field.
3. Bronze finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
60W	7800lm	0.49A	4000K	> 70	130
80W	10400lm	0.67A	4000K	> 70	130
100W	13000lm	0.83A	4000K	> 70	130
120W	15600lm	1.00A	4000K	> 70	130

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.

Ref#: 20250703