



## MOUNTING



Twins Heads or More Heads Mount



The Venus LED Post Top has an elegant, slim and compact appearance. Pleasing to the eye, it adds architectural structure to any outdoor space. A fine example of pedestrian-scale lighting design offering both comfort and security to the site. Choose a single head, twin heads or more to be combined on a single pole and individually positioned with a pole binding mounting bracket for each head.

## TECHNICAL DATA

<b>Wattage</b>	25W, 40W, 60W
<b>CRI</b>	70-Standard
	80-Optional
<b>CCT</b>	3000K, 4000K, 5000K
<b>Input Voltage</b>	120-277VAC, 50/60Hz
<b>Operating Temp.</b>	-40°F to 104°F (-40°C to 40°C)
<b>Certifications</b>	cETL Listed
	RoHS compliant
<b>Power Factor</b>	>0.9 at full load
<b>Harmonic Distortion</b>	<20% at full load
<b>Projected Lifetime</b>	L70 - 100,000 Hours
<b>IP Rating</b>	IP65


## FEATURES

- Slim & Compact Design:** Sleek and compact appearance that enhances the architectural aesthetics of outdoor spaces.
- Durable Construction:** Die-cast aluminum housing for long-lasting outdoor performance.
- Pole Compatibility:** Pole binding mount for 4" pole.
- Surge Protection:** 10KA surge suppression protection available.


## SPECIFICATION

### Dimension


#### Pole Binding Mount

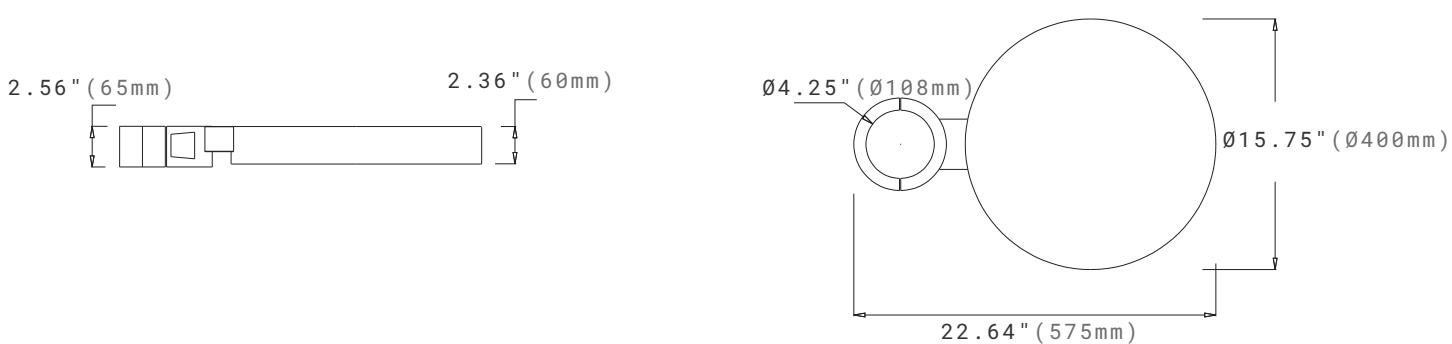

#### Single Head Mount

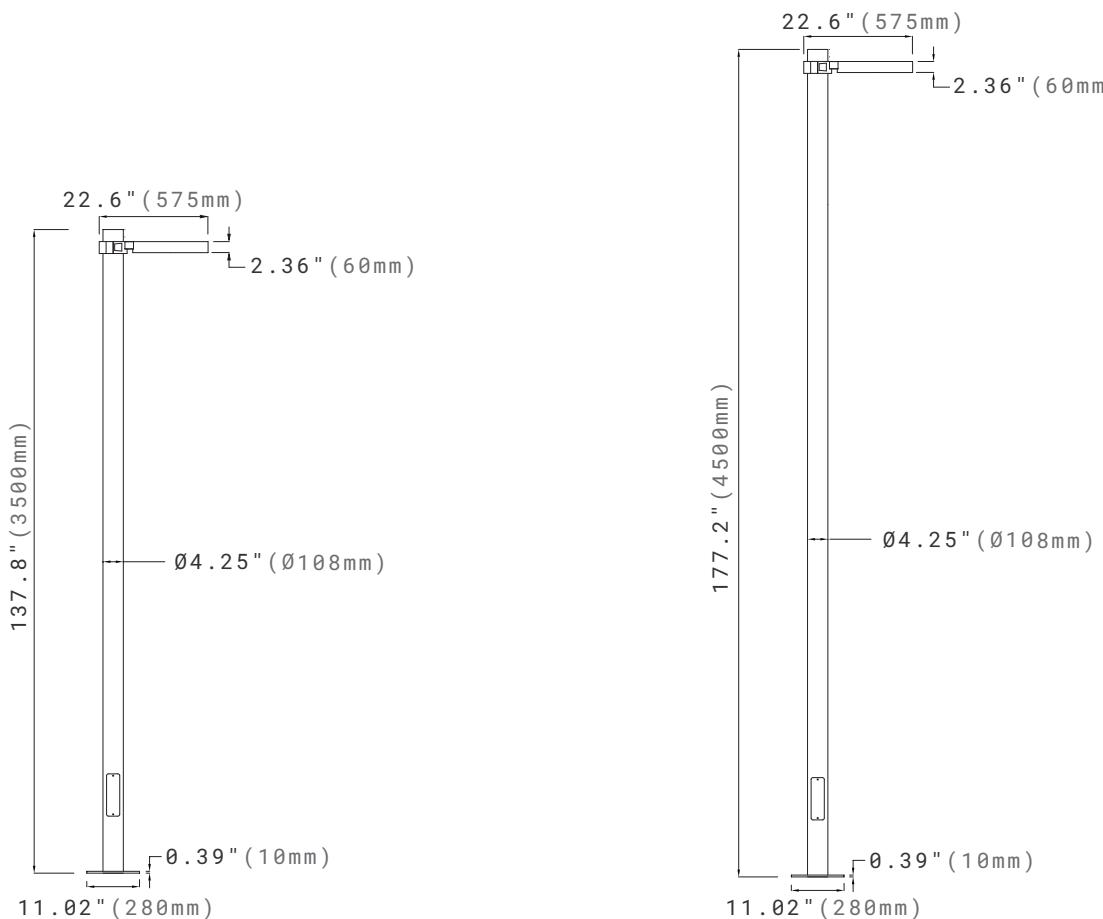

## Twins Heads Mount

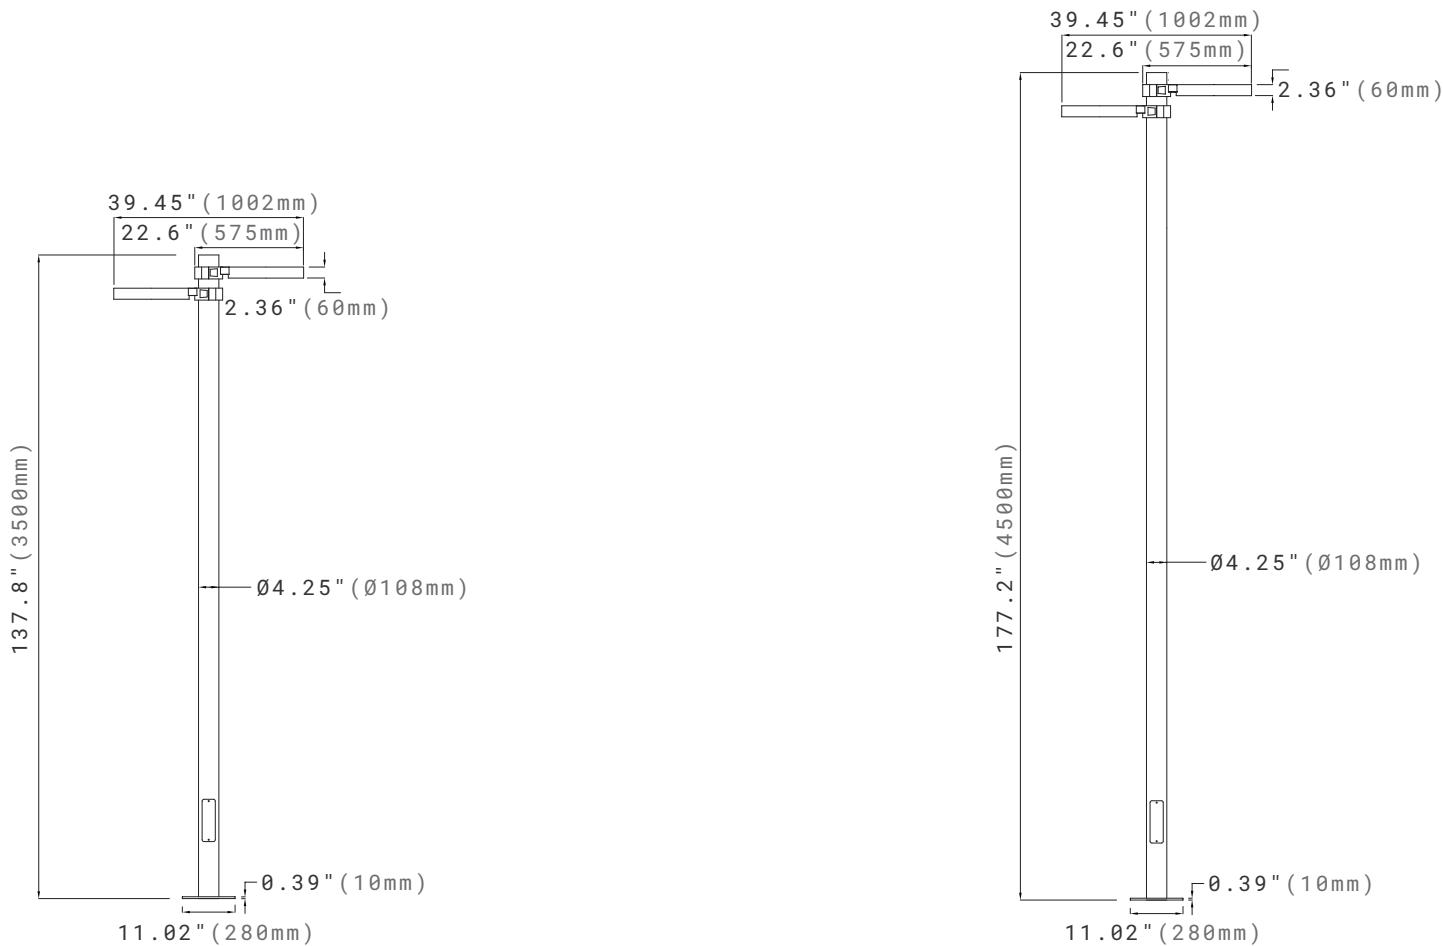

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	Distribution Type	CRI
25W	1900lm	5000K	Type V	>70
40W	3350lm	5000K	Type V	>70
60W	4560lm	5000K	Type V	>70

## Effective Project Area

Mounting Arm	Tilt Angle	EPA
Single Head 	0°	0.44ft <sup>2</sup>
Twins Heads 	0°	0.89ft <sup>2</sup>

## ORDERING INFORMATION


EXAMPLE: VSPT40401-PBM-V-BK

VSPT							
Series	Wattage	CCT	Voltage	Control	Installation	Distribution	Finish
VSPT	25 25w	30 3000K	1 120-277V	BLANK On/Off	PBM 4" Pole Binding Mount	V Type V	BK <sup>2</sup> Black
	40 40w	40 4000K					
	60 60w	50 5000K					


### NOTE:

1. Driver need to be mounted remotely in the pole.
2. Standard Finish is Black. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

## ACCESSORIES (ORDER SEPARATELY)



**ABMK-COPL-3/4M**  
Anchor Bolts Mounting Kits  
for 118.11"-157.48"  
(3000-4000 mm) height pole.  
M14x400mm



**AAL01-R4-12FT-BK**  
Round pole, Ø4.25"(108mm),  
137.8" (3500mm) height, black.

**ABMK-COPL-4/5M**  
Anchor Bolts Mounting Kits  
for 157.48"-196.85"  
(4000-5000 mm) height pole.  
M16x450mm

**AAL01-R4-15FT-BK**  
Round pole, Ø4.25"(108mm),  
177.2" (4500mm) height, black.

## BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
VSPT40301-PBM-V-BK	B1-U0-G1
VSPT60301-PBM-V-BK	B2-U0-G1

## WARRANTY

5 years limited warranty.

Specifications subject to change without notice.