

STRAIGHT MAGNETIC TRACK LIGHT

Bell Pendant



Magnetic Track Profile



Magnetic Track Profile
Recessed with Flange

NOTE:
Straight Magnetic Track Profile sold separately.



The Bell Pendant is for decoration and general lighting. Elegant body coating. 65° beam angle. Comfortable lighting without glare. Thanks to the length adjustable cable, the magnetic pendant works smooth in different spaces.

TECHNICAL DATA

Wattage	10W
Input Voltage	24VDC
Beam Angle	65°
CCT	2700K, 3000K, 3500K, 4000K
CRI	90Ra
Driver	Triac, 0/1-10V
Certifications	cETL Listed
	RoHS compliant
Installation	Magnetic
Environment	Indoor

ORDERING INFORMATION


EXAMPLE: BEL10-3090-24V-65-MTM-BK

BEL						
Series	Wattage	CCT&CRI	Voltage	Beam Angle	Installation	Finish
BEL	10 10W	2790 2700K/90Ra 3090 3000K/90Ra 3590 3500K/90Ra 4090 4000K/90Ra	24 ¹ 24VDC ¹	65 65 degree	MTM Magnetic Track Mount	BK ² Black ² <i>Optional</i> WH ² White ²

NOTE:


1. The fixture is used for 24V magnetic track system.
2. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

DIMENSION

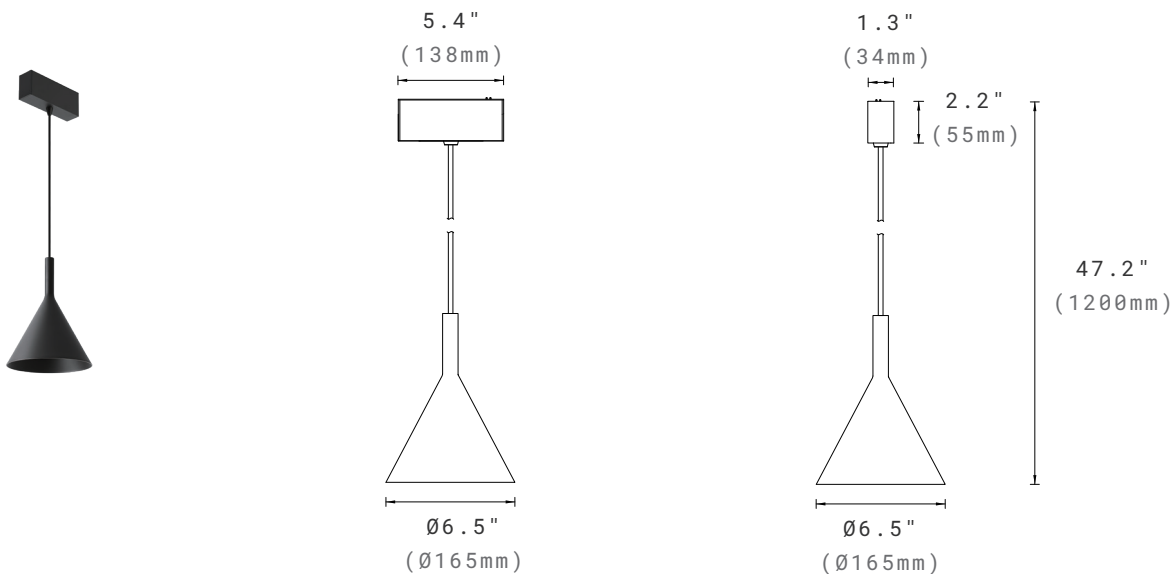

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.



h(m)	E(lx)	Φ(m)
1	500	Φ1.20
2	125	Φ2.40
3	55.6	Φ3.60
4	31.2	Φ4.80
5	20	Φ6.00

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Beam Angle	Lumen Output	CRI	CCT	LPW
10W	65°	480lm	90	3000K	48

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.