


The Poulynoe LED Wall Light is designed in an architecture round shape and full cut-off design. It combines aluminium structure and glass lens in one integral beautiful streamlined shape. Suitable for both indoor and outdoor wall light application.

TECHNICAL DATA

Wattage	12W
CRI	80
CCT	3000K, 4000K
Input Voltage	120V, 50/60Hz
Operating Temp.	-13°F to 95°F (-25°C to 35°C)
Driver	Non dimming
Certifications	Suitable for wet locations
	RoHS compliant
Power Factor	>0.87 at full load
Projected Lifetime	L70 - 100,000 Hours

SPECIFICATION

Net Weight: 1.41lbs

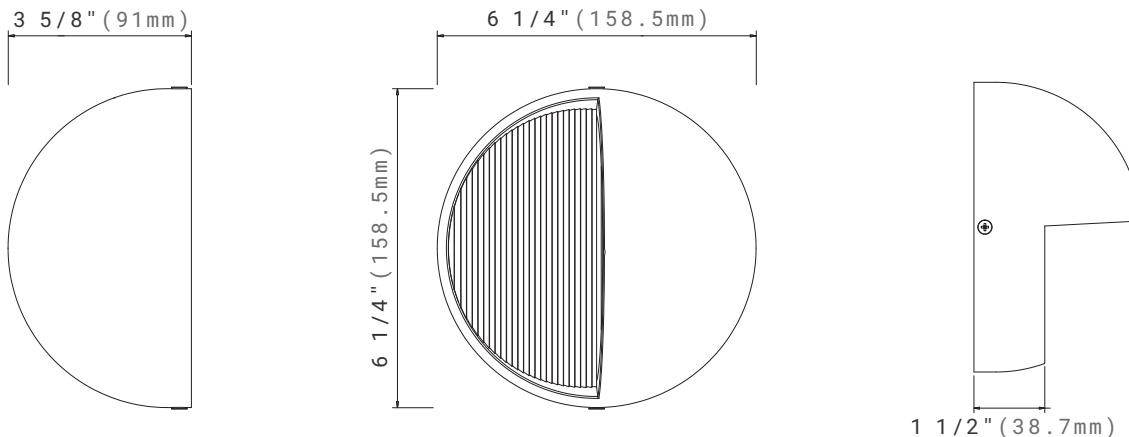

ORDERING INFORMATION

EXAMPLE: POU12304-BK

POU					
Series	Wattage	CCT	Voltage	Control	Finish
POU	12 12W	30 3000K 40 4000K ¹	4 120V	BLANK On/Off	BK Black ²


NOTE:

1. 4000K has minimum order requirement. Please contact Customer Service for additional information.
2. Black finish is standard. Custom color is available for a premium setup fee. Consult Customer Service for additional information.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

Ref#: 20250910

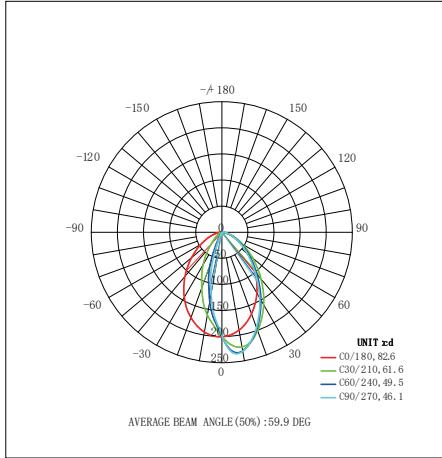

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	AC Input 120V	CCT	CRI
12W	280lm	0.09A	3000K	80

WARRANTY

2 years limited warranty.

Specifications subject to change without notice.