

SOLID SLIM

Recessed Step And Wall Light



Compact and inconspicuous design with asymmetrical light distribution, directing light downward, minimizing uplight while revealing the texture of the stepped baffle. Die-cast aluminum housing, silicone rubber gasket, tempered glass, akzoNobel powder coating. Heavier powder coating optional for marine ambient corrosion resistance. Ideal for the illumination of ground surfaces, building entrances, stairs and footpaths.

TECHNICAL DATA


Wattage	4W, 7W, 12W
	Selectable 7W/9W/12W
CRI	80
CCT	3000K, 4000K
	Selectable 2700K/4000K/5000K
Input Voltage	120-277VAC, 50/60Hz
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Driver	
Standard	Non dimming
Optional	0-10V dimming
Certifications	cETL Listed
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65

FEATURES


- **Housing Construction:** Heavy duty cast aluminum housing with tempered glass lens.
- **Mounting System:** Stainless steel pre-installed housing with marine grade treatment available.
- **Optical Performance:** Asymmetrical light distribution.

SPECIFICATION

Fixed 12W and 12SP

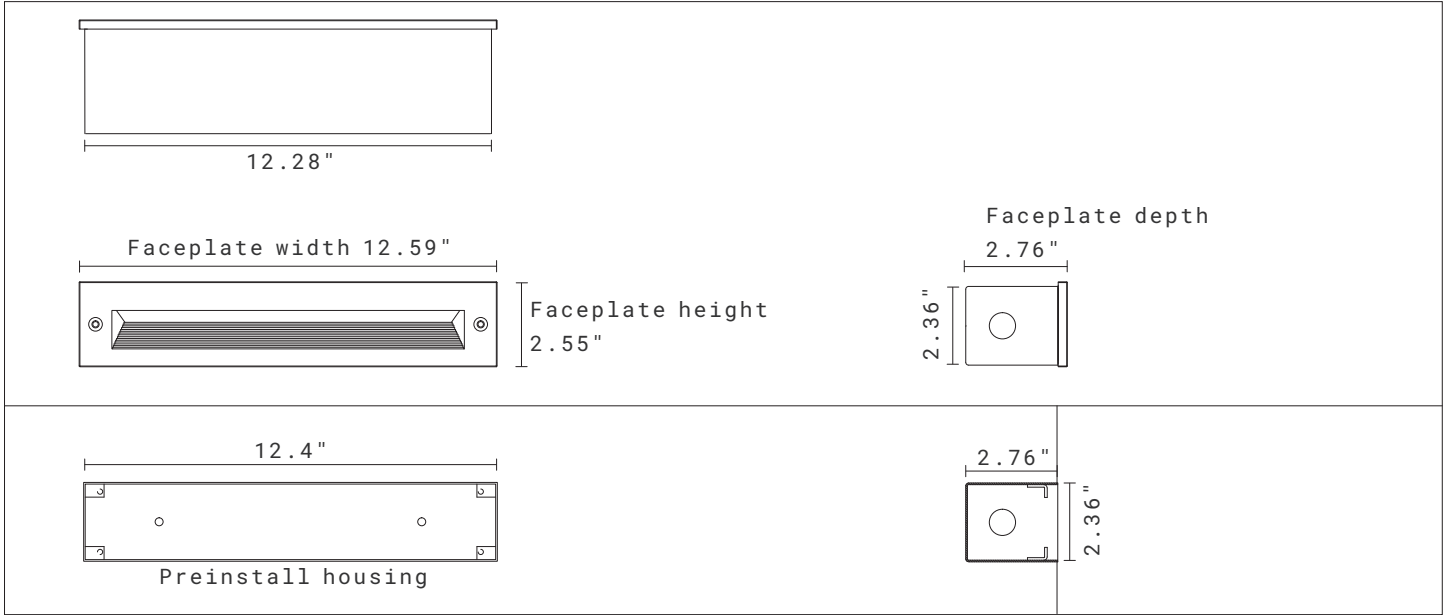


Fixed 4W

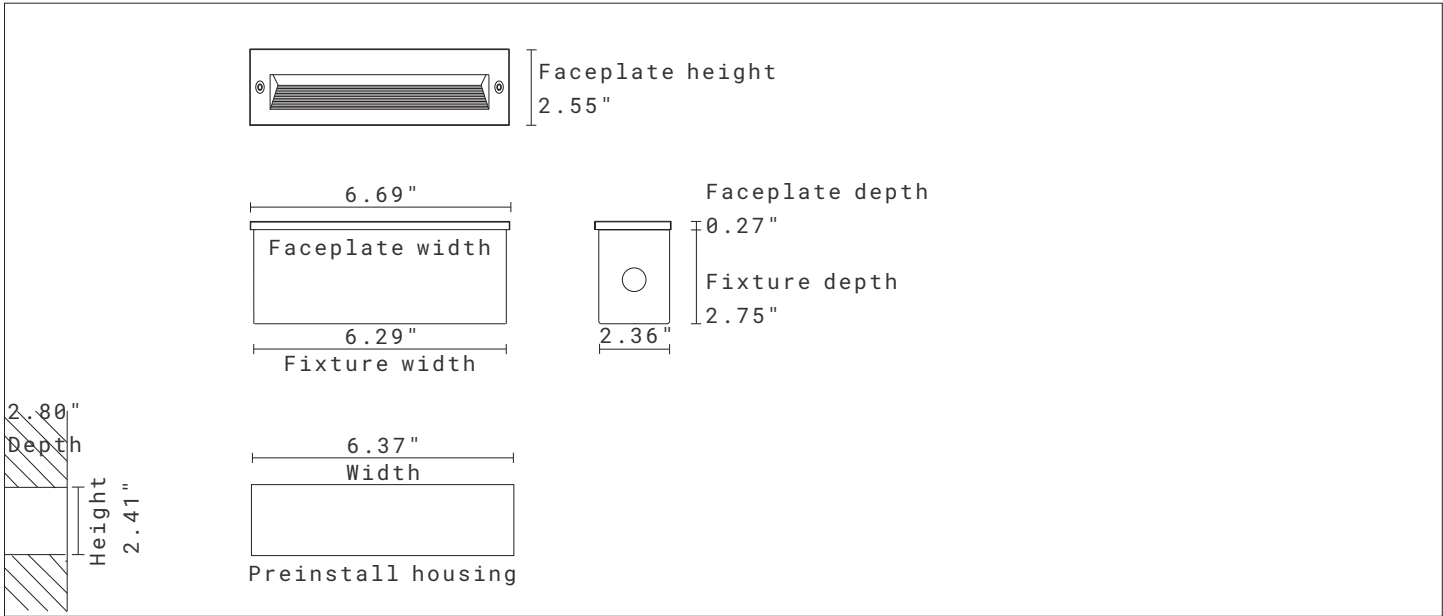


SPECIFICATION

Fixed 7W

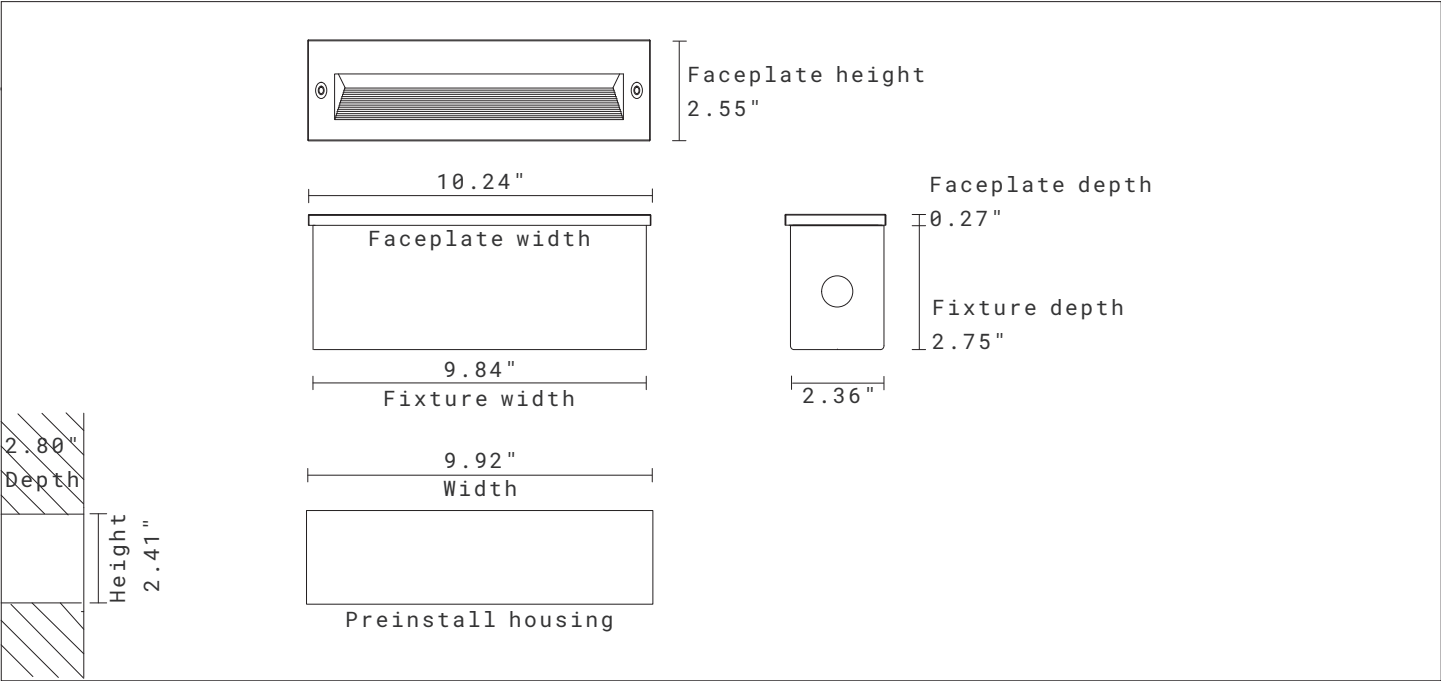

ACCESSORIES (ORDERED SEPARATELY AND FIELD INSTALLED)



SMWL-07IN-PBOX
Preinstall box for
6.69" SMWL step light.

SMWL-10IN-PBOX
Preinstall box for
10.24" SMWL step light.

SMWL-12IN-PBOX
Preinstall box for
12.28" SMWL step light.

SOLID SLIM

Recessed Step And Wall Light

ORDERING INFORMATION

EXAMPLE: SMWL12301-RM-BK

SMWL							
Series	Wattage	CCT	Voltage	Control	Installation	Faceplate Finish	Option
SMWL	4 4W	30 3000K	1 120-277V	BLANK On/Off	RM Recessed	Standard BK Black ⁴ RAL9011	BLANK None
	7 7W	40 4000K				Optional WH White RAL9016	M Marine ambient corrosion resistance
	12 12W						D 0-10V Dimming
	12SP Selectable ¹ 7W 9W 12W	SW Selectable ² 2700K 4000K 5000K				GY Gray RAL7012 BZ Mineral Bronze SL Silver RAL9006	

NOTE:

- 12W is default setting.
- 4000K is default setting.
- Please choose the preinstall box in following Accessory Table.
- Black finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

