



The Tria Pendant Light comes in geometric triangle forms. Available in multiple sizes to fit the scale, proportions and light output requirements of the project. Optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

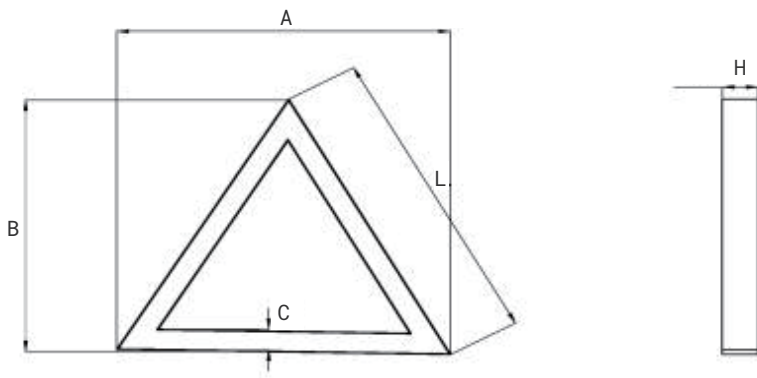
TECHNICAL DATA

Wattage	25W, 40W, 90W, 180W
CRI	90Ra
CCT	3000K, 3500K, 4000K
Dimming	0-10V Dimming - standard
Input Voltage	120 - 277V, 50/60Hz
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
	Suitable for damp locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours

FEATURES

- **Versatile Design Options:** Features geometric triangle forms in 4 sizes, available in standard light and acoustic with light versions.
- **Customizable Aesthetics:** Offers over 30 acoustic felt colors for personalized design solutions.

SPECIFICATION



Wattage	A	B	C	L	H
25W	16.4"(416mm)	14.2"(360mm)	1.97"(50mm)	16.36"(415mm)	3.0"(75mm)
40W	20.5"(520mm)	17.7"(450mm)	1.97"(50mm)	20.45"(520mm)	3.0"(75mm)
90W	30.7"(780mm)	26.6"(675mm)	1.97"(50mm)	30.7"(780mm)	3.0"(75mm)
180W	40.9"(1038mm)	35.4"(900mm)	1.97"(50mm)	40.9"(1038mm)	3.0"(75mm)

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	AC Input 120V	CCT	LPW
25W	2500lm	0.21A	3000K	100
40W	4000lm	0.33A	3000K	100
90W	9000lm	0.75A	3000K	100
180W	18000lm	1.50A	3000K	100







ORDERING INFORMATION

EXAMPLE: TRIA-25-40 90 1-ACPMK-WH-NSAC-021 130

TRIA					
1. Series	2. Acoustic Configuration	3. Watts/Diameter	4. CCT	5. CRI	6. Voltage
TRIA	BLANK Light without Acoustic LA Light with Acoustic <i>If choose Acoustic, please choose the acoustic color in the following list.</i>	25 25W 40 40W 90 90W 180 180W	30 3000K 35 3500K 40 4000K	90 90Ra	1 120-277V
	7. Installation	8. Controls	9. Frame Finish	10. Acoustic Color ¹	
	ACPMK Aircraft Cable Suspended Mount Kits	BLANK 0-10V Dimming	WH White <i>White finish frame is standard. Custom colors might be available for an additional fee. Please check with Customer Service for more information.</i>	<i>Please specify acoustic color code from the following list.</i>	

ORDERING INFORMATION

Acoustic Colors

									
NSAC-021 130	NSAC-042 146	NSAC-028 110	NSAC-002 122	NSAC-033 103	NSAC-013 111	NSAC-018 125	NSAC-004 123	NSAC-016 104	NSAC-035 101
									
NSAC-005 107	NSAC-006 106	NSAC-007 145	NSAC-008 129	NSAC-025 138	NSAC-038 127	NSAC-039 143	NSAC-009 140	NSAC-014 144	NSAC-011 135
									
NSAC-017 147	NSAC-022 119	NSAC-031 108	NSAC-020 128	NSAC-019 126	NSAC-001 141	NSAC-003 120	NSAC-040 124	NSAC-036 105	NSAC-024 117
									
NSAC-043 115	NSAC-034 102	NSAC-012 133							

NOTE:

1. The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103.
Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.

Ref#: 20251103