



The Wingsuit Acoustic Light is a high-performing and sound-absorbing LED pendant luminaire with a wing appearance. The acoustic light is made up of a sound absorbing polyester fiber material. It is a new material that integrate sound absorbing, heat insulation and decorative effects. Deep anti-glare cup optic design is for better glare control. Direct and indirect distributions.

TECHNICAL DATA


Wattage	65W
CRI	80Ra
CCT	3000K, 3500K, 4000K
Driver	0-10V Dimming - standard
Input Voltage	120 - 347V, 50/60Hz
Operating Temp.	-4°F to 104°F(-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
	Suitable for dry locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours

FEATURES

- **Acoustic Performance:** Features sound-absorbing polyester fiber for optimal noise reduction.
- **Optical Performance:** Equipped with deep anti-glare cup optics, offering direct, indirect and soft side light distributions.

SPECIFICATION

Net Weight: 7.72 lbs / 3.5 kg

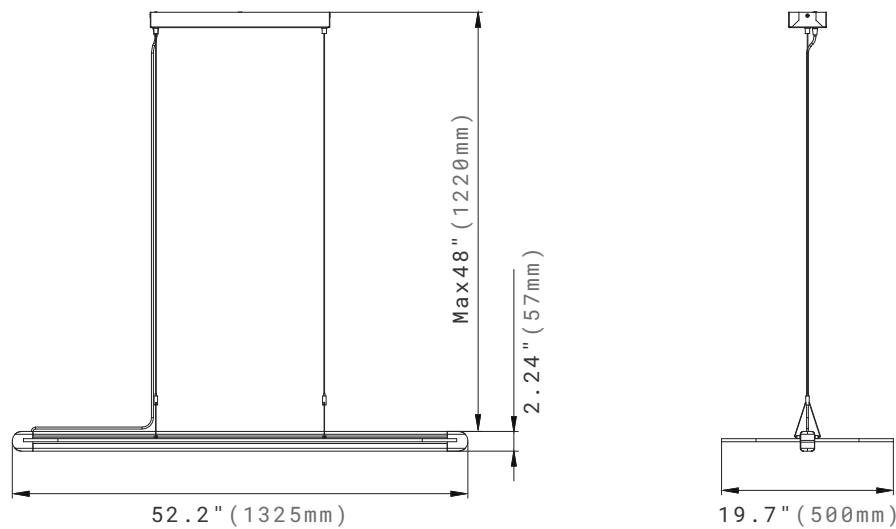




ORDERING INFORMATION

EXAMPLE: WINID65-40808-DG

WIN							
Series	Distribution	Wattage	CCT	CRI	Voltage	Controls	Finish
WIN	ID Direct and Indirect	65 65W	30 3000K 35 3500K 40 4000K	80 80Ra	8 120-347V	BLANK 0-10V Dimming	DG Dark Gray

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

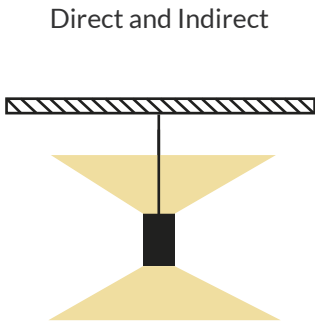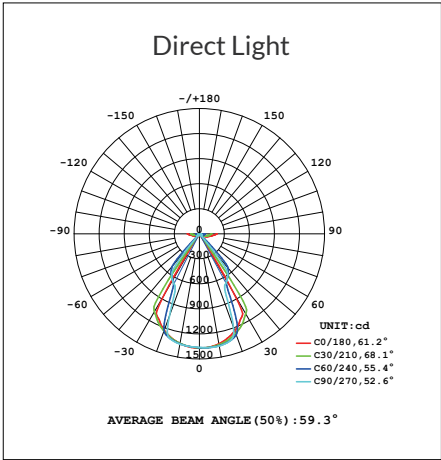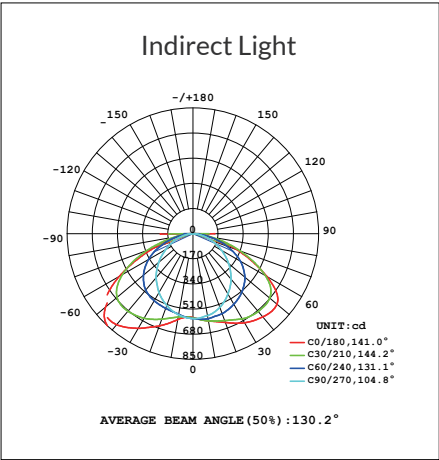

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output Direct + Indirect	AC Input 120V	CCT	CRI
65W	2300lm+1500lm	0.50A	4000K	80

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.

Ref#: 20251106