

The Canoe Pendant body is constructed of high quality, die-cast aluminum alloy, and features a recessed honeycomb lens. This honeycomb cellular light control system reduces the glare effectively. In addition, the lamp body can be ordered wrapped in attractive acoustic style fabric. This fixture is ideal in offices, conference rooms, public buildings, libraries, and other commercial lighting applications.

TECHNICAL DATA

Wattage	38W
CCT	3000K, 3500K, 4000K
Driver	0-10V Dimming
CRI	80 is standard 90 is optional
Input Voltage	120-347V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES

- Aluminum alloy body and die-casting ends.
- Honeycomb lens.
- Various fabric colors available.


SPECIFICATION

Dimension

Cable and cord length: 59" standard.

Please contact Customer Service if need special length.

Net Weight: 8.2lbs/3.7kg.

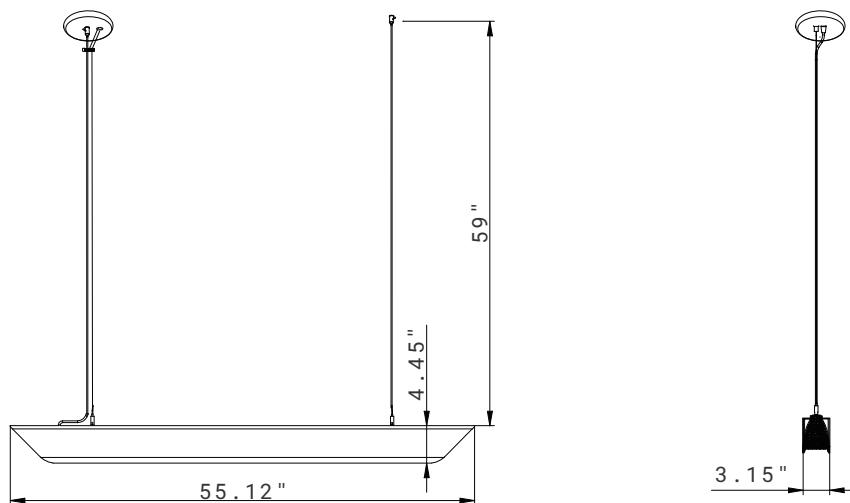

ORDERING INFORMATION

EXAMPLE: CANO38-40808-WH

CANO								
Series	Wattage	CCT	CRI	Voltage	Installation	Controls	Housing Finish	Fabric Finish
CANO	38 38W	30 3000K 35 3500K 40 4000K	80 ¹ 80Ra ¹ 90 ¹ 90Ra ¹	8 120-347V	BLANK Pendant	BLANK 0-10V Dimming	WH ² White ² BK Black	BLANK No Fabric ³ GY Grey BU Blue OR Orange

NOTE:


1. 80 CRI is standard. 90 CRI can be available for an additional fee. Please contact Customer Service.
2. White housing finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
3. No fabric is standard. Different colorful fabrics will be available for an additional fee. Please check with Customer Service for details.

Ref#: 20251225

COLOR OPTIONS



ILLUMINATION RATIO



PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Output

Wattage	Lumen Output	AC Input 120V	CCT	CRI
38W	2000lm	0.32A	4000K	80

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.