


Wall Mount A (WMA)

Wall Mount B (WMB)
SAFETY INSTRUCTION


READ CAREFULLY BEFORE INSTALLING FIXTURE. PLEASE KEEP THIS MANUAL FOR FUTURE USE.
Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


**MAKE CERTAIN POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.
CHECK THAT VOLTAGE IS COMPATIBLE WITH FIXTURE DRIVER. USE APPROVED CONNECTORS FOR ALL ELECTRICAL CONNECTIONS.**

MAINTENANCE CAUTION


1. Review the wire connection before beginning, and make sure fixture is grounded properly.
2. For lighting controls, follow control instructions carefully.
3. Turn power off and wait for fixture to cool before performing maintenance.
4. Maintenance must be done by professionals.

WIRE CONNECTION

Universal voltage driver permits operation at 120VAC thru 277VAC or 347VAC, 50 or 60 Hz.

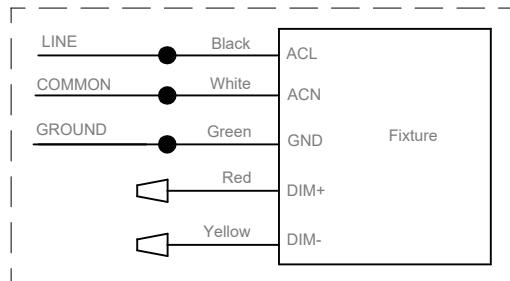

Make the following Electrical Connection:

- a). Connect the voltage supply line to ACL in Black.
- b). Connect the voltage supply Neutral to ACN in White.
- c). Connect Green ground lead to the supply ground lead.
- e). If 0-10V Dimming is used, connect the supply negative dimming lead to our 0-10V (Dim-) Wire.
- d). If 0-10V Dimming is used, connect the supply positive dimming lead to our 0-10V (Dim+) Wire.


INSTALLATION— SLIP FITTER
ACCESSORY PACK


WIRE NUT x 5

INSTALLATION—WALL MOUNT A

Surface-Mounted Wall Box

1. Take out the fixture and mount box kits from the package. Remove screws & washers A (6). Separate the mount box and cover kits.
2. Secure the mount box to the wall.
3. Pass the fixture's cord through the cover kits. Use wire terminals to connect the wires according to the wiring diagram.
4. Place both the wire terminals and cord into the mount box. Reattach the box cover using screws & washers A (6).
5. Remove screws & washers B (2) and the plate from the lamp head. Slide the fixture arm onto the slider, then refasten the plate and screws & washers B (2).

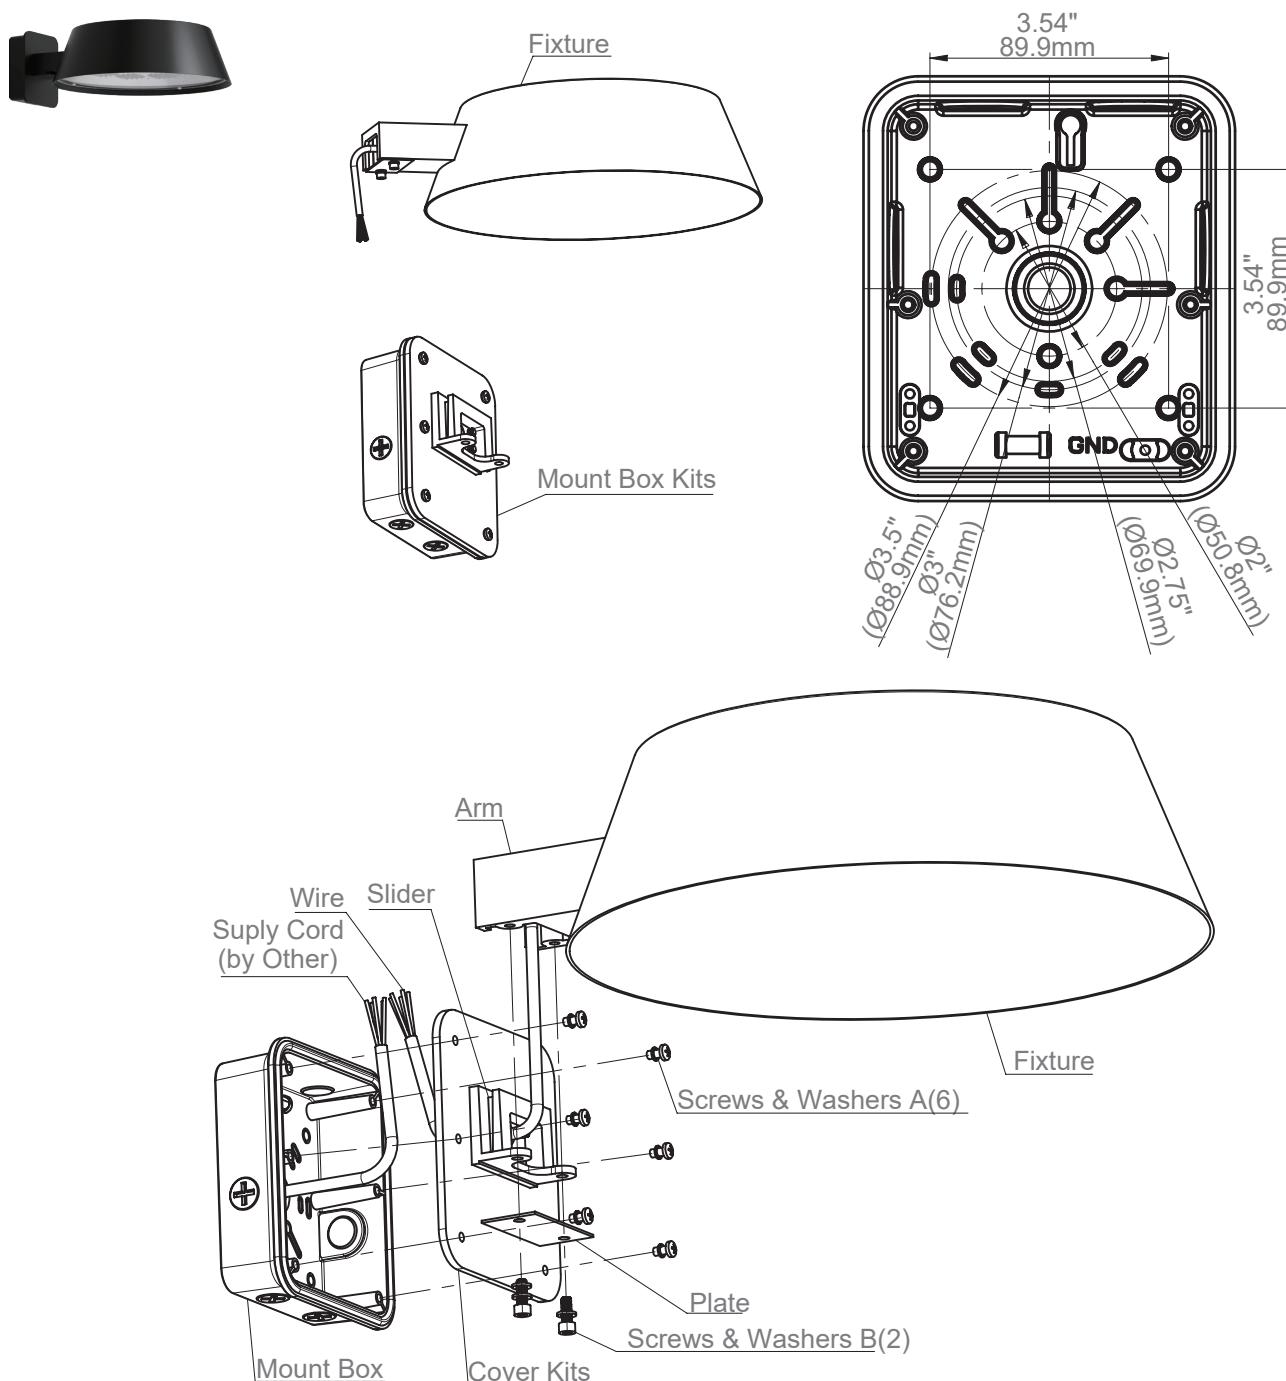

INSTALLATION—WALL MOUNT B
ACCESSORY PACK


Mount Plate



Gasket



Screws & Washers A x6



Screws B x4

Flush-Mounted Wall Box

1. Take out the fixture and mount plate from the package.
2. Drill holes in the wall according to the hole pattern diagram. Secure the mount plate to the wall using screws & washers A (4).
3. Use wire terminals to connect the wires according to the wiring diagram.
4. Place both the wire terminals and cord into the junction box. Secure the fixture to the mount plate using screws B (4).

