



The Venus LED Post Top has an elegant, slim and compact appearance. Pleasing to the eye, it adds architectural structure to any outdoor space. A fine example of pedestrian-scale lighting design offering both comfort and security to the site. Choose a single head, twin heads or more to be combined on a single pole and individually positioned with a pole binding mounting bracket for each head.

TECHNICAL DATA

Wattage	25W, 40W, 60W
CRI	70-Standard 80-Optional
CCT	3000K, 4000K, 5000K
Input Voltage	120-277VAC, 50/60Hz
Operating Temp.	-40°F to 104°F (-40°C to 40°C)
Certifications	cETL Listed RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65
EPA (Pole not included)	0.44ft ² (single head) 0.89ft ² (twins heads)
Wind Load	
Single Head 11.48ft	Poles are rated for 170 mph allowable design wind speed (VASD).
Twins Heads 11.48ft	Poles are rated for 150 mph allowable design wind speed (VASD).
Single Head 14.77ft	Poles are rated for 130 mph allowable design wind speed (VASD).
Twins Heads 14.77ft	Poles are rated for 120 mph allowable design wind speed (VASD).
Please make sure the concrete base is strong enough to bear the pole weight and wind load.	

MOUNTING



Twins Heads or More Heads Mount


FEATURES

- **Slim & Compact Design:** Sleek and compact appearance that enhances the architectural aesthetics of outdoor spaces.
- **Durable Construction:** Die-cast aluminum housing for long-lasting outdoor performance.
- **Pole Compatibility:** Pole binding mount for 4" pole.
- **Surge Protection:** 10kA surge suppression protection available.

SPECIFICATION


Dimension

Pole Binding Mount

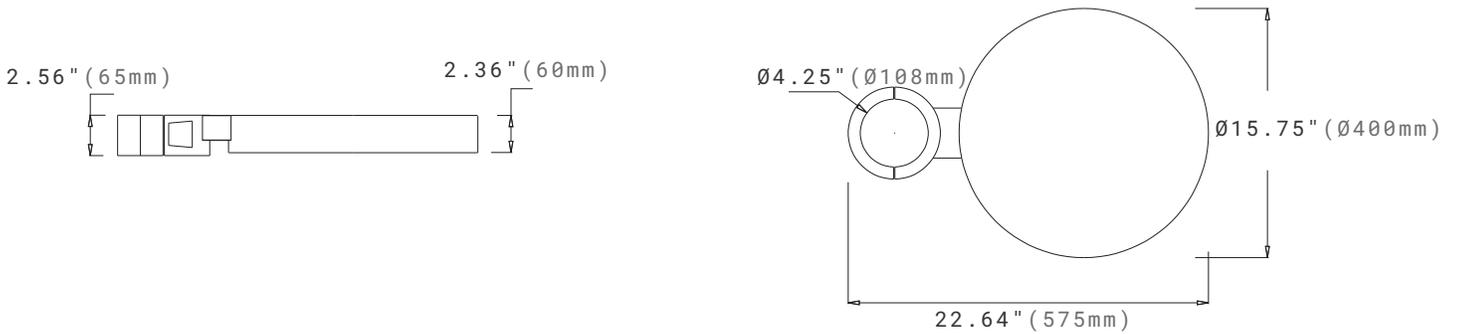


Single Head Mount

Thickness: 0.098"

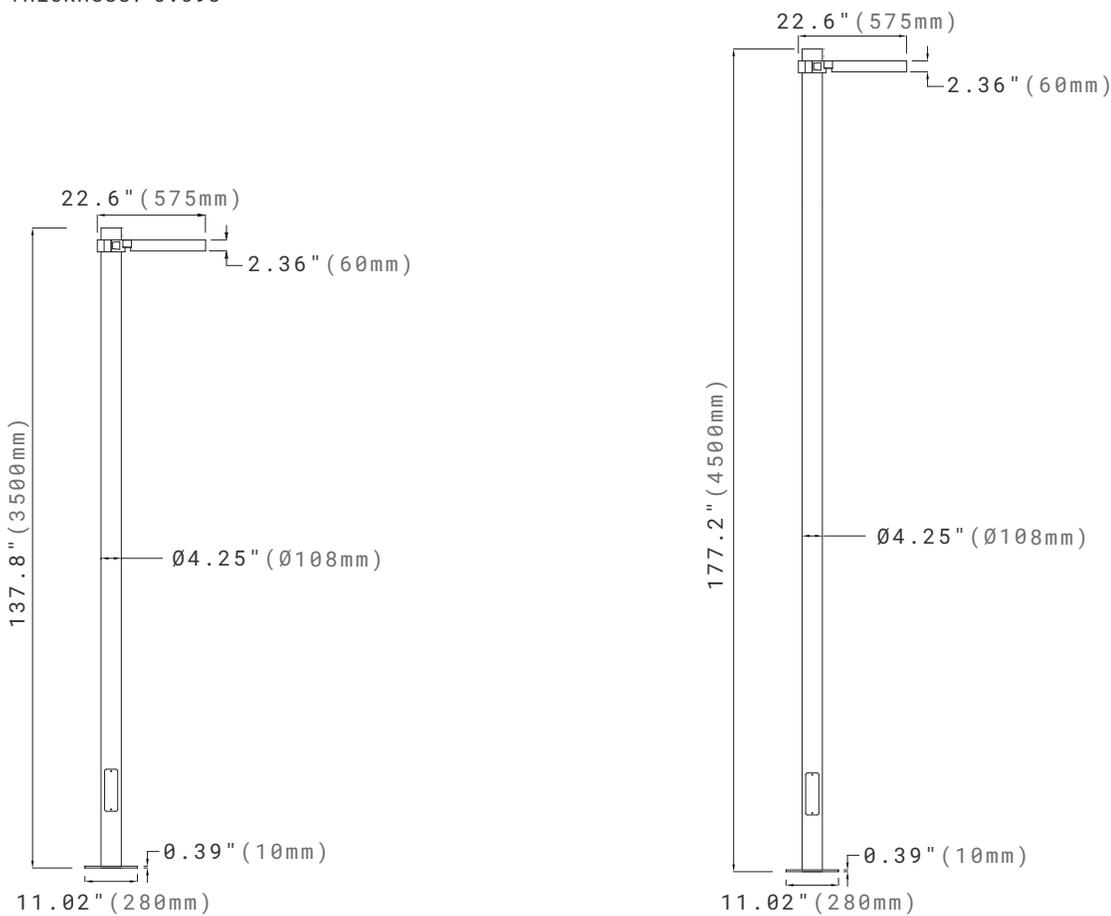


Twins Heads Mount

Thickness: 0.098"

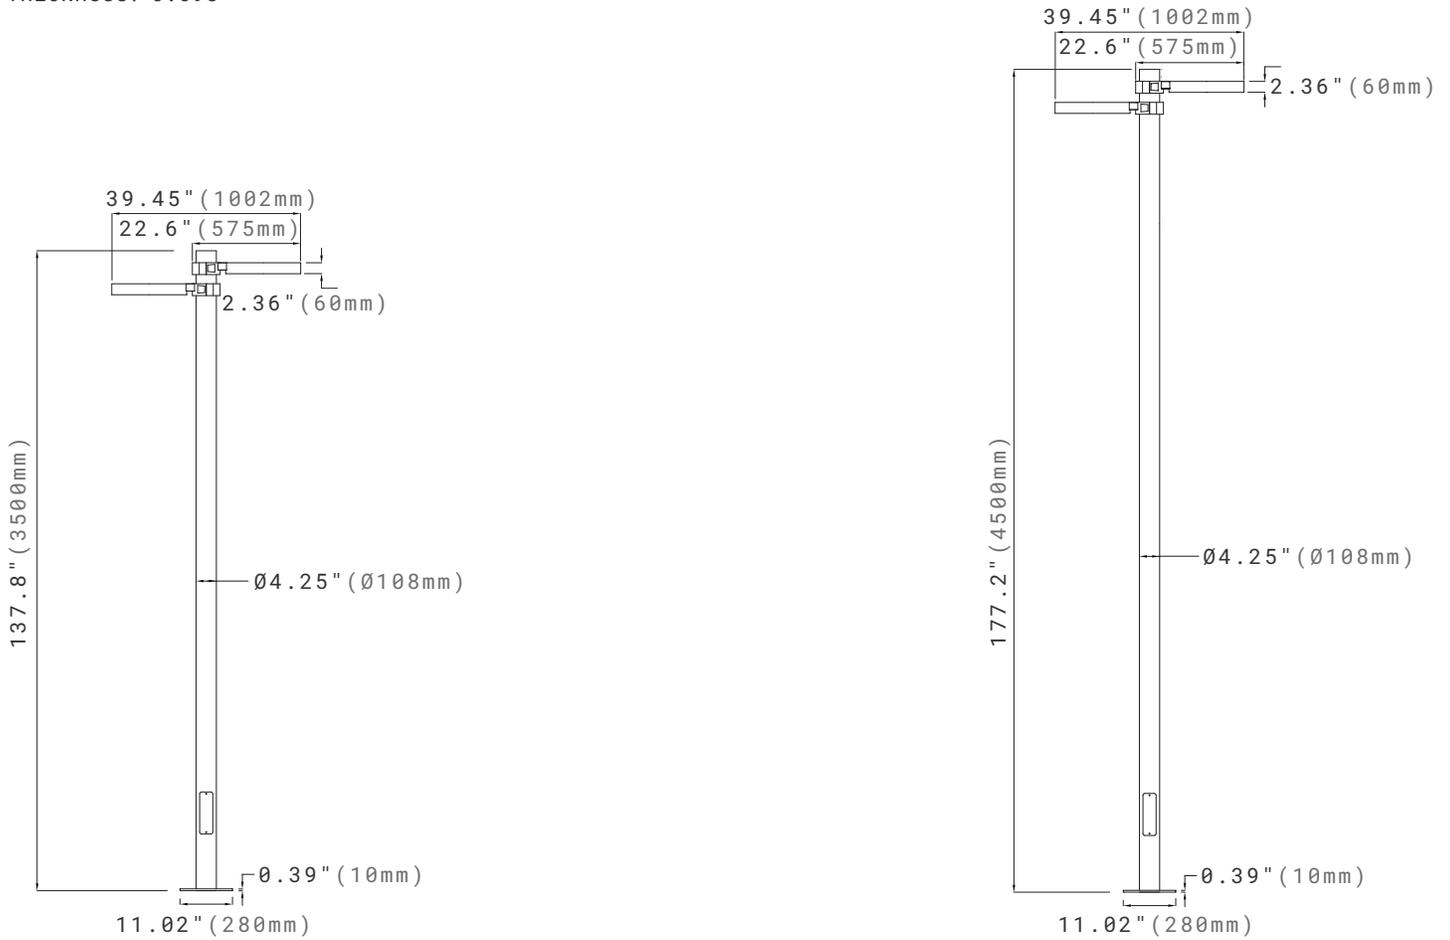

Base Plate

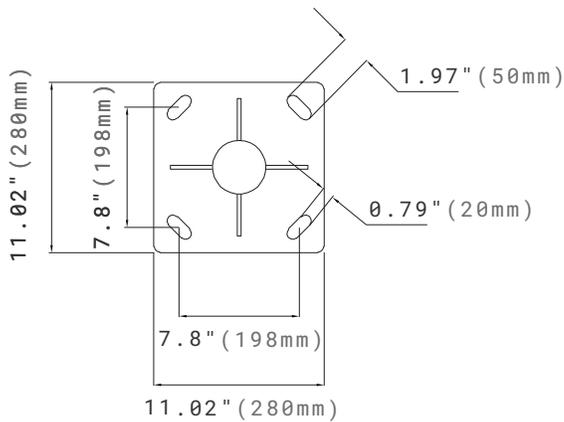

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	Distribution Type	CRI
25W	2250lm	3000K	Type V	>70
40W	3350lm	3000K	Type V	>70
60W	4560lm	3000K	Type V	>70


Effective Project Area

Mounting Arm	Tilt Angle	EPA
Single Head 	0°	0.44ft ²
Twins Heads 	0°	0.89ft ²

ACCESSORIES (ORDER SEPARATELY)



ABMK-COPL-5/6M
 Anchor Bolts Mounting Kits
 for pole up to 19.69ft (6000mm)
 with M16x500mm anchor bolts.

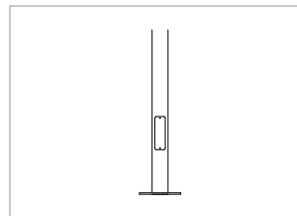

AAL01-R4-12FT-BK¹
 Round pole, Ø4.25"(108mm),
 137.8" (3500mm) height, black.

AAL01-R4-15FT-BK¹
 Round pole, Ø4.25"(108mm),
 177.2" (4500mm) height, black.

NOTE:

1. Pole length and finish color can be customized.

ORDERING INFORMATION

EXAMPLE: VSPT40401-PBM-V-BK

VSPT							
Series	Wattage	CCT	Voltage	Control	Installation	Distribution	Finish
VSPT	25 25w	30 3000K	1 120-277V	BLANK On/Off	PBM 4" Pole Binding Mount	V Type V	BK ² Black
	40 40w	40 4000K					
	60 60w	50 5000K					

NOTE:

1. Driver need to be mounted remotely in the pole.
2. Standard Finish is Black. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
VSPT25301-PBM-V-BK	B1-U0-G1
VSPT40301-PBM-V-BK	B1-U0-G1
VSPT60301-PBM-V-BK	B2-U0-G1

WARRANTY

5 years limited warranty.
 Specifications subject to change without notice.