

4" WIDE MAGIC LED LINEAR LIGHT

Surface Mount



The Magic LED Linear Light is a sleek, 4-inch-wide architectural fixture designed for surface mounting, featuring a slim profile ideal for discreet installations. Available in standard lengths of 2', 3', 4', and 8'; it supports seamless joining for custom continuous runs. The Magic LED Linear Light delivers uniform illumination with selectable CCT (3000K/3500K/4000K). Optional illuminated joiners enable modular configurations for creative lighting designs.


TECHNICAL DATA

Length	2ft, 3ft, 4ft, 8ft
CRI	80
CCT	Selectable 3000K/3500K/4000K
Driver	
Standard	0-10V Dimming, dim to 10%
Optional	0-10V Dimming, dim to 1%
Compatible Dimmer	LUTRON: DVSTV
	LEVITON: IP710
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cULus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	Suitable for damp locations
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours

Family Product

Recessed

Suspended

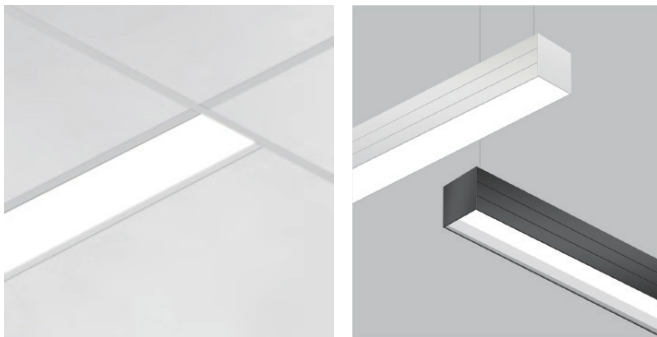


Please refer to <https://www.abovealllighting.com/> for family product details.

FEATURES


- **Adjustable & Customizable:** Dimmable with selectable CCT (3000K/3500K/4000K), delivering adaptable illumination for diverse environments. Lumen output up to 1200lm/ft. Flat lens & deep regressed lens options available.
- **Optional Add-ons:** Optional joiners including T-shape, L-shape, line, and cross configurations for unlimited creative lighting patterns. Microwave motion sensors and emergency battery backups available.

SPECIFICATION


Side View




2ft




3ft



4ft



8ft



ORDERING INFORMATION

EXAMPLE: MAG1238-SW1-10D-SM-D-FDL


MAG					
1. Series	2. Length	3. Width	4. Driver	5. CCT	6. Voltage
MAG Magic	06¹ 2ft Selectable 20W ¹ /15W/10W 09¹ 3ft Selectable 30W ¹ /22.5W/15W 12¹ 4ft Selectable 40W ¹ /30W/20W 24¹ 8ft Selectable 80W ¹ /60W/40W Option² Desired System Length ²	38 3.8 inch	BLANK Integral	SW³ Selectable 3000K 3500K 4000K ³	1 120-277V
	7. Dimming	8. Mounting Options	9. Light Distribution	10. Lens Options	11. Finish
	10D Standard 0-10V Dimming, dim to 10% 01D Optional 0-10V Dimming, dim to 1%	SM⁴ Surface Mount	D 100% Downlight	FDL⁵ Flush Diffused Lens RGL⁵ Regressed	BLANK White BK Black

ORDERING INFORMATION


NOTE:

1. The default wattage setting is the highest available for each length: 20W for 2ft, 30W for 3ft, 40W for 4ft, 80W for 8ft.
2. Fixtures are supplied in nominal lengths to ensure uniform illumination across runs and configurations. If custom runs are required, please provide us with your specific requirements in advance. The factory can pre-assemble middle runs and end runs for simplified installation, or end users may modify standard individual fixtures into these configurations as needed.
3. The default CCT setting is 4000K.
4. Please specify the Continuous Roll-Out Lens from the accessory table below for joined lengths exceeding 8ft.


ACCESSORIES (ORDERED SEPARATELY AND FIELD INSTALLED)




MAG38-T
Illuminated T-Shape Joiner.



MAG38-L
Illuminated 90° L-Shape Joiner.



MAG38-LINE
Illuminated Line Shape Joiner.



MAG38-CROSS
Illuminated Cross Shape Joiner.



MAG38-ROL¹
Continuous Roll-Out Lens (42').




MAG-MSW-PM/SM
Microwave Motion Sensor Kit for Pendant/Surface Mounting.



AAL-RC-100
Remote Control for Microwave Motion Sensor.



AAL-EBU-AC08D-YYY²
Remote 8W LED Emergency Battery Back-up. 120-347VAC.



MAG-SMK
Surface Mount Kits.


NOTE:

1. For joined lengths exceeding 8ft, only the Continuous Roll-Out Lens may be used.
2. The 8W EBU supports up to 60W total lighting load. The 25W EBU supports up to 150W total lighting load. The dimming control wire must be connected. The EBU is Title 20 compliant. Emergency battery backup operates within ambient temperatures of 32°F to 95°F (0°C to 35°C).


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

2ft, Flat Lens, 4000K, 100% Downlight

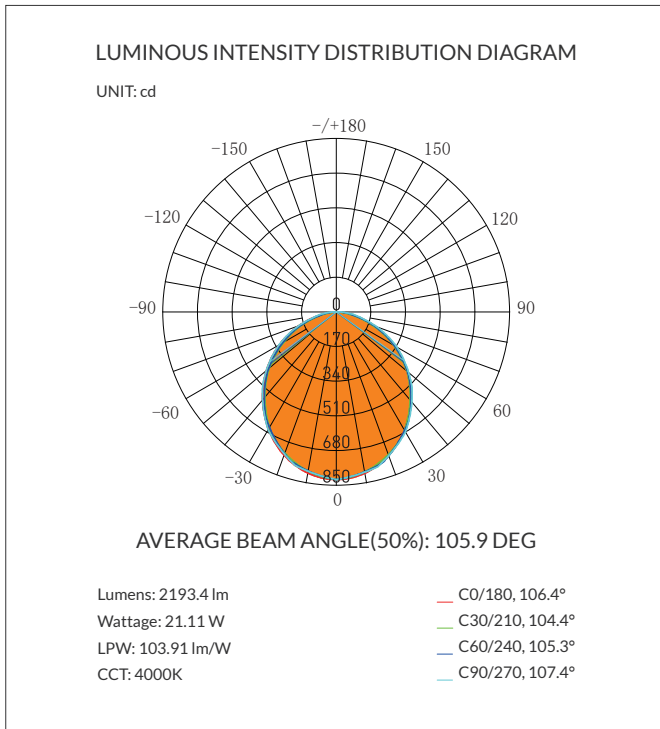

4ft, Flat Lens, 4000K, 100% Downlight

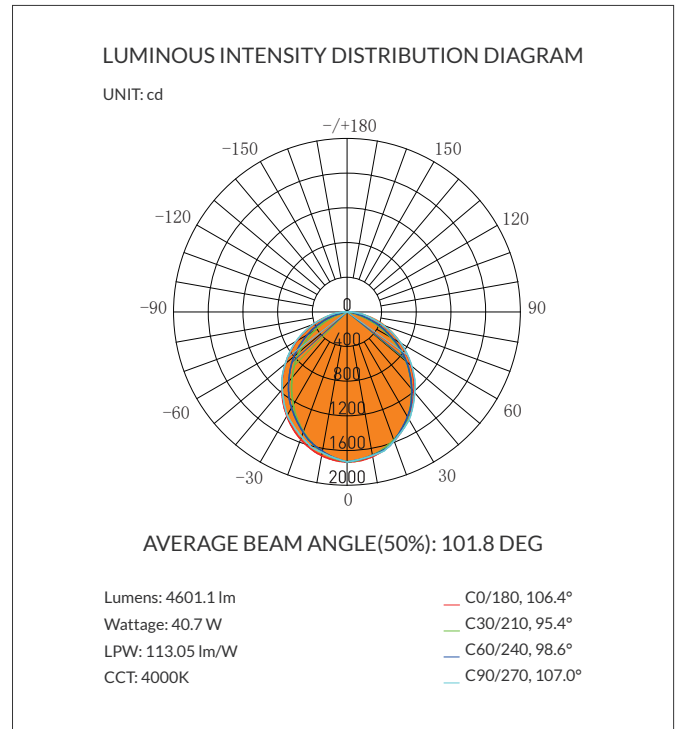

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Optics	Length	100% Down@3500K		
		High	Medium	Low
Flat Lens	2ft, 3ft, 4ft, 8ft	1100lm/ft, 10W/ft	800lm/ft, 7.5W/ft	550lm/ft, 5W/ft
Regressed Lens	2ft, 3ft, 4ft, 8ft	900lm/ft, 10W/ft	670lm/ft, 7.5W/ft	450lm/ft, 5W/ft

NOTE:

- Above data are subject to 3500K, all efficacy is ±5% base on different CCT and lighting distributions. Please check the IES file to gain the accurate data. For 3000K fixtures, use 0.96 multiplier; for 4000K fixtures, use 1.04 multiplier.

MICROWAVE DIMMING SENSOR SETTING (120-277V)

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application. The sensor setting also can be done by a remote control (RC-100) which need to be bought separately.

	1	2	
I	↓	↓	20%
II	↓	↑	50%
III	↑	↓	75%
IV	↑	↑	100%

Sensitivity

Sensitivity can be reduced by selecting the combination on the DIP switches to fit precisely each application.

Default Setting: 100%

	3	4	
I	↓	↓	10s
II	↓	↑	1min
III	↑	↓	5mins
IV	↑	↑	15mins

Hold time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

Default Setting: 15mins

	5	6	
I	↓	↓	
II	↓	↑	10 lux
III	↑	↓	30 lux
IV	↑	↑	50 lux

Daylight sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

Default Setting:  (Disable)

	7	8	
I	↓	↓	0%
II	↓	↑	10%
III	↑	↓	30%
IV	↑	↑	50%

Stand-by dimming level

The low light level you would like to have after the hold time in the long absence of people.

Default Setting: 50%

	9	10	
I	↓	↓	+∞
II	↓	↑	1min
III	↑	↓	30mins
IV	↑	↑	60mins

Stand-by time

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people. When set to “ +∞ ” mode, the low light is maintained until motion is detected.

Default Setting: 30mins

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.