



The Selectable Vapor Tight Series provides gasketed enclosure which provides dust-free and moisture-free fixture. Made of high quality ABS base and polycarbonate lens and stainless steel latches. Length available in 2ft, 4ft and 8ft. The Vapor Tight Series can be widely used for food processing plants, meat lockers, beverage coolers, car washes, and parking structures.

TECHNICAL DATA

CRI

Standard	80
----------	----

CCT	Selectable 3500K/4000K/5000K
-----	------------------------------

Input Voltage

Standard	120-277VAC, 50/60Hz
----------	---------------------

Optional	120-347VAC, 50/60Hz
----------	---------------------

Operating Temp.	-40°F to 95°F (-40°C to 35°C) ¹
-----------------	--

Driver

Standard	0-10V Dimming
----------	---------------

Certifications	cETL listed
----------------	-------------

	RoHS compliant
--	----------------

	Suitable for wet locations
--	----------------------------

Power Factor	>0.9 at full load
--------------	-------------------

Harmonic Distortion	<20% at full load
---------------------	-------------------

Projected Lifetime	L70 - 100,000 Hours
--------------------	---------------------

IK Rating	IK10
-----------	------

IP Rating	IP65
-----------	------

NOTE:

1. If for 4ft, 80W, the maximum Ambient is 86°F (30°C).

FEATURES

- **Versatile Sizes & Protection:** Available in 2ft, 4ft and 8ft lengths with IP65 rating for wet locations and stainless steel latches for durability.
- **Customizable Performance & Control:** Wattage and CCT selectable with optional wired/wireless occupancy and daylight sensors.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Size	Nominal Lumen	CCT	CRI	LPW
20W	2FT	2800lm	4000K	>80	140
30W	4FT	4200lm	4000K	>80	140
40W	4FT	5600lm	4000K	>80	140
50W	4FT	7000lm	4000K	>80	140
65W	4FT	8000lm	4000K	>80	123
80W	4FT	10000lm	4000K	>80	125
50W	8FT	7000lm	4000K	>80	140
60W	8FT	8400lm	4000K	>80	140
70W	8FT	9800lm	4000K	>80	140

ORDERING INFORMATION


EXAMPLE: SVP2-12D-50SP-SW1

SVP2							
Series	Dimension	Dimmable	Wattage	CCT	Voltage	Control	Installation
SVP2	06 2FT	D 0-10V Dimmable	20 20W	SW Selectable 3500K 4000K ³ 5000K	1 120-277V ⁴ 8 120-347V ⁴	BLANK None	BLANK Surface Mount
	12 4FT	D 0-10V Dimmable	50SP Selectable 30W 40W 50W ¹			MSW Microwave Motion Sensor ⁵ MSWB Bluetooth Microwave Motion Sensor ⁶ EBU Emergency Battery Back-up ⁷	<i>The following options need to be ordered separately. Please check details in the following accessory table.</i> Corner Mount Brackets Aircraft Cable Pendant Mount Kits Junction Box Mount Kits
	24 8FT	D 0-10V Dimmable	70SP Selectable 50W 60W 70W ²			Optional Bluetooth PIR Motion Sensor needs to be bought separately and field installed.	

NOTE:


- 50W is default setting. Higher power 65W and 80W can be done as special order. Please contact Custom Service for details.
- 70W is default setting.
- 4000K is default setting.
- 120-277V is standard. 120-347V is optional.
- Microwave dimming sensor, for mounting height 20ft (6m) max. Dimming default setting is Bi-Level dim, 50% on vacancy and 100% on Occupancy. Daylight sensor is disable. Other settings such as 10% or 30% dimming level can be set by the remote controller RC100.
- The Bluetooth microwave sensor is for mounting height of 20ft (6m) max.
- Emergency battery back-up is only for 4ft, 50SP and works for a minimum of ninety (90) minutes. Ambient temperatures of 32°F to 95°F (0 °C to 35°C).
- End-side cable installed is standard. Gray finish is standard. Additional charge will apply for optional finish.

ACCESSORIES (ORDERED SEPARATELY AND FIELD INSTALLED)




SVP2-CMB

Corner Mount Brackets.



SVP2-ACPMK

Aircraft Cable Pendant Mount Kits.



SVP2-JBMK

Junction Box Mount Kits for back-side cable installed.



AAL-RC-100

Remote control for microwave dimming sensor.

Bluetooth PIR Motion Sensor



BMS-S823-PIR-1-BLE-SR-ZMO

Passive Infrared (PIR) Occupancy Sensor with Bluetooth Mesh Feature.



LS02-HB3-WH

360° High Bay Lens,
Max. detection radius 30ft;
Max. mounting height 8ft.



LS02-LB4-WH

360° Low Bay Lens,
Max. detection radius 30ft;
Max. mounting height 40ft.

SPECIFICATION

2FT

L*W*H (inch)

23.62*4.33*3.46

4FT


L*W*H (inch)

47.24*4.33*3.46

8FT


L*W*H (inch)

94.48*4.33*3.46

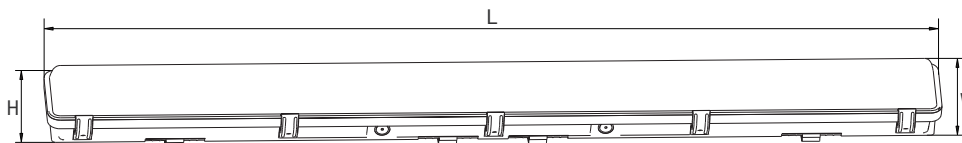


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

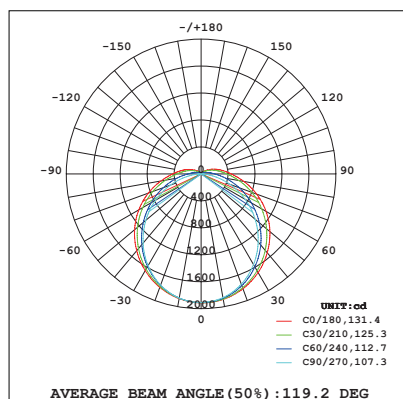

BLUETOOTH MOTION SENSOR

Bluetooth Mesh Control

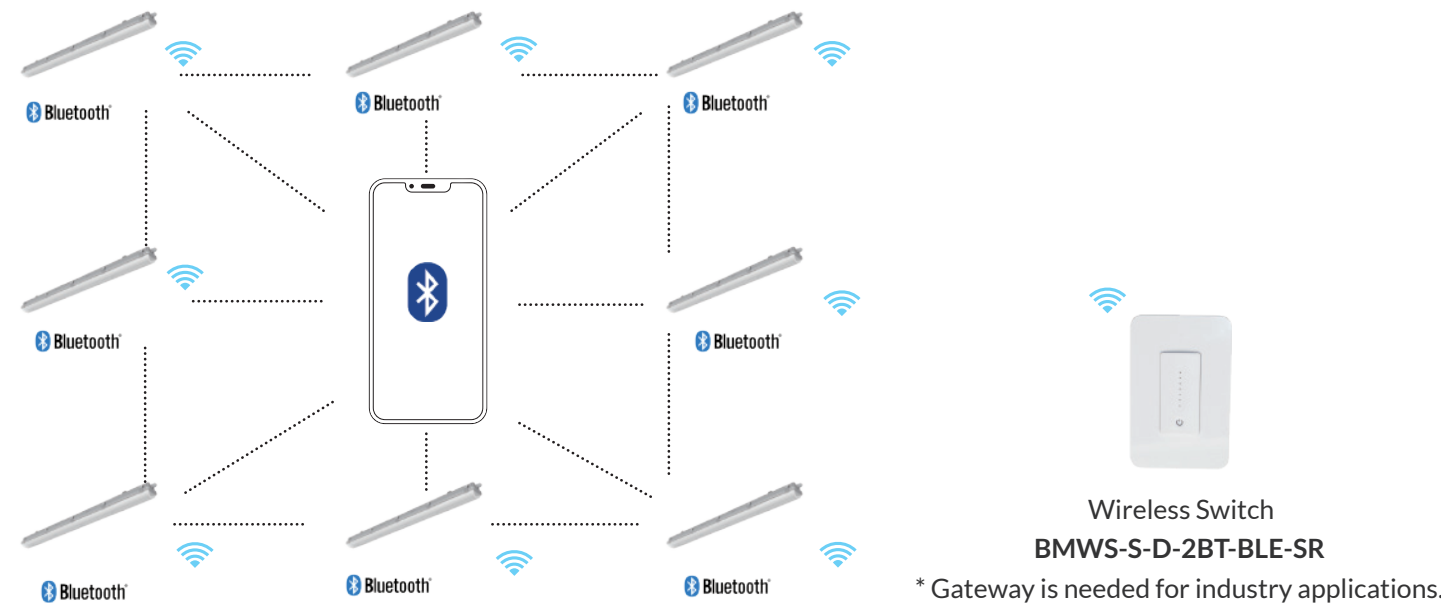


BLUETOOTH MICROWAVE MOTION SENSOR



Model No.	Description	Input Voltage	Output	Mounting
BMS-S7D-MSW-DC2-BLE-SR	Bi-level Microwave (MSW) Occupancy Sensor with Bluetooth Mesh Feature	10-14VDC	0-10VDC	Magnests Built-in Mounted in fixture

DETECTION AREA



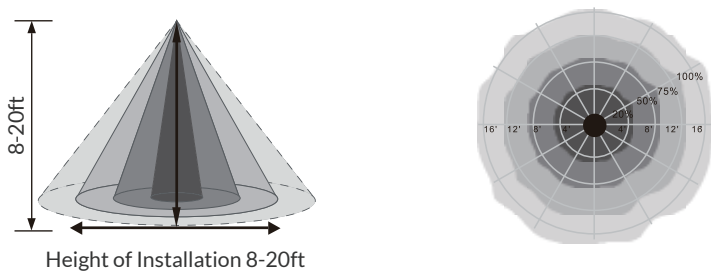


BLUETOOTH PIR MOTION SENSOR






Model No.	Description	Input Voltage	Output	Mounting
BMS-S823-PIR-1-BLE-SR-ZMO	Passive Infrared (PIR) Occupancy Sensor with Bluetooth Mesh Feature	120/277VAC	0-10V	Z Shaped Side Mount With Enclosure for IP65
Add Suffix for Options	Description			
LS02-HB3-WH	360° High Bay Lens, Max.detection radius 30ft; Max.mounting height 8ft, white color.			
LS02-LB4-WH	360° Low Bay Lens, Max.detection radius 30ft; Max.mounting height 40ft, white color.			

HB3 LENS

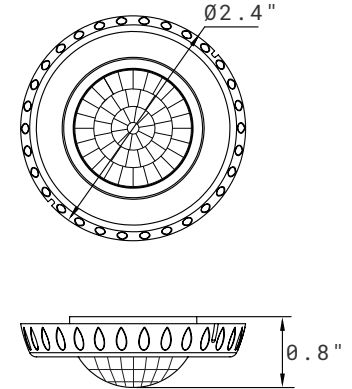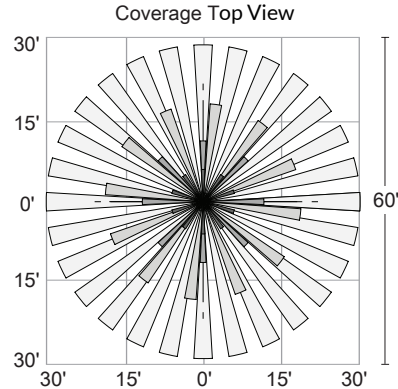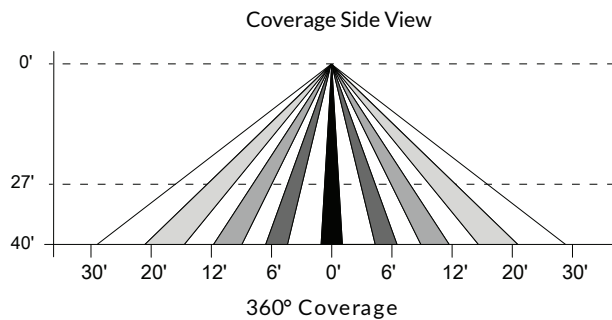

LB4 LENS

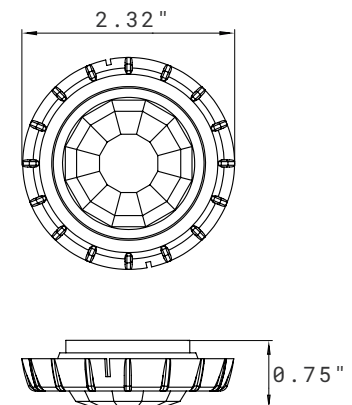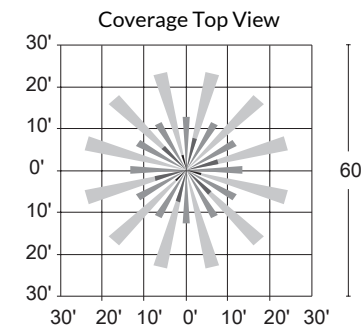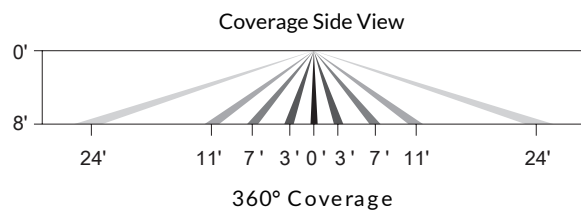

MICROWAVE DIMMING SENSOR SETTING

Sensor data can be precisely set for each specific application by a remote controller which need to be bought separately.

Detection area

Detection area can be reduced by selecting the combination on the remote controller to fit precisely each application.

Optional Setting: 100%/75%/50%/25%

Default Setting: 100%

Hold Time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

Optional Setting: 10S/1min/10min/15min

Default Setting: 15min

Stand-by period

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people.

When set to “+∞” mode, the low light is maintained until motion is detected.

Optional Setting: 1min/30min/60min/+∞

Default Setting: +∞

Stand-by dimming level

The low light level you would like to have after the hold time in the long absence of people.

Optional Setting: 0%/10%/30%/50%

Default Setting: 50%

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.