VRUD VICKY RING LIGHT
Upward & Downward

ABOVE ALL
www.AboveAllLighting.com



The Vicky Ring Light is a unique ring style light with an LED light source illuminating upward and downward. It is available in sizes ranging from 23.6” (dia.) up to 196.9” (dia.). Aluminum body constructions. A versatile architectural lighting solution, available as pendant mount. Optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

PERFORMANCE DATA

Watt.	Direct Lumen/ Wattage	Indirect Lumen/ Wattage	LPW
65W	3400lm/40W	2100lm/25W	85
80W	4760lm/56W	2000lm/24W	85
120W	7140lm/84W	3060lm/36W	85
135W	7650lm/90W	3800lm/45W	85
150W	8900lm/105W	3800lm/45W	85
200W	12750lm/150W	4250lm/50W	85
300W	17800lm/210W	7650lm/90W	85
400W	25500lm/300W	8500lm/100W	85
480W	28560lm/336W	12200lm/144W	85

**For complete performance data, please refer to the detailed table on page 2.*

TECHNICAL DATA

Wattage	65W, 80W, 120W, 135W, 150W
	200W, 300W, 400W, 480W
CCT	3000K, 3500K, 4000K, 5000K
Driver	0-10V Dimming standard
CRI	90
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
	Suitable for dry location
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES

- Fixtures in diameters from 23.6" through 196.9".
- Direct and indirect illuminating.
- Available in standard light and acoustic w/light.
- 30+ acoustic felt colors available.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.


Wattage	Direct Lumen/ Wattage	Indirect Lumen/ Wattage	AC Input 120V	CCT	CRI	LPW
65W	3400lm/40W	2100lm/25W	0.54A	4000K	90	85
80W	4760lm/56W	2000lm/24W	0.67A	4000K	90	85
120W	7140lm/84W	3060lm/36W	1.00A	4000K	90	85
135W	7650lm/90W	3800lm/45W	1.13A	4000K	90	85
150W	8900lm/105W	3800lm/45W	1.25A	4000K	90	85
200W	12750lm/150W	4250lm/50W	1.67A	4000K	90	85
300W	17800lm/210W	7650lm/90W	2.50A	4000K	90	85
400W	25500lm/300W	8500lm/100W	3.33A	4000K	90	85
480W	28560lm/336W	12200lm/144W	4.00A	4000K	90	85


NOTE:

1. Lumen outputs for 120W, 135W, 150W, 200W, 300W, 400W and 480W are calculated.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.



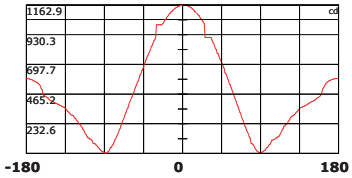

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

ORDERING INFORMATION

EXAMPLE: VRUD-6524-40901-ACPMK-WH-NSAC-021 130

VR						
1. Series	**2. Light Emitting**	**3. Acoustic Configuration**	**4. Wattage/ Diameter**	**5. CCT**	**6. CRI**	**7. Voltage**
VR Vicky Ring	**UD** Upward and Downward Light	**BLANK** Light without Acoustic **LA**[1] Light with Acoustic[1] *Specify color from the following list.*	**6524** 65W/Ø23.6" **8035** 80W/Ø35.4" **12047** 120W/Ø47.2" **13559**[2&3] 135W[2&3]/Ø59.1" **15079**[2&3] 150W[2&3]/Ø78.8" **20098**[2&3] 200W[2&3]/Ø98.4" **300118**[2&3] 300W[2&3]/Ø118.1" **400158**[2&3] 400W[2&3]/Ø157.5" **480197**[2&3] 480W[2&3]/Ø196.9"	**30** 3000K **35** 3500K **40** 4000K **50** 5000K	**90** 90Ra	**1** 120V-277V


8. Installation	**9. Control**	**10. Frame Finish**		**11. Acoustic Finish**
ACPMK[4] Central Canopy Aircraft Cable Suspended[4] *for 24/35/47/59" only* **DPMK**[4] Direct Aircraft Cable Suspended[4] *for 79/98/118/158/197" only*	**BLANK** 0-10V Dimming	**WH**[5] White[5] **BK**[5] Black[5]	**Optional Finish Colors** *(Need Additional Charge)*[5]	**BLANK** No Acoustic **Acoustic Color Code**[6] *Specify from the following table*[6]

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

NOTE:

1. If choose acoustic, please choose the acoustic color in the following list.
2. Acoustic is not available for 135W, 150W, 200W,300W, 400W and 480W.
3. 135W, 150W, 200W, 300W, 400W and 480W are shipped in sections and need to be installed in the field.
4. Central canopy suspended is standard for 65W/80W/120W/135W. Direct suspended is standard for 150W, 200W, 300W, 400W, 480W. Please contact Customer Service for special requirements.
5. White and black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
6. There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects. The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

Acoustic Colors[5]

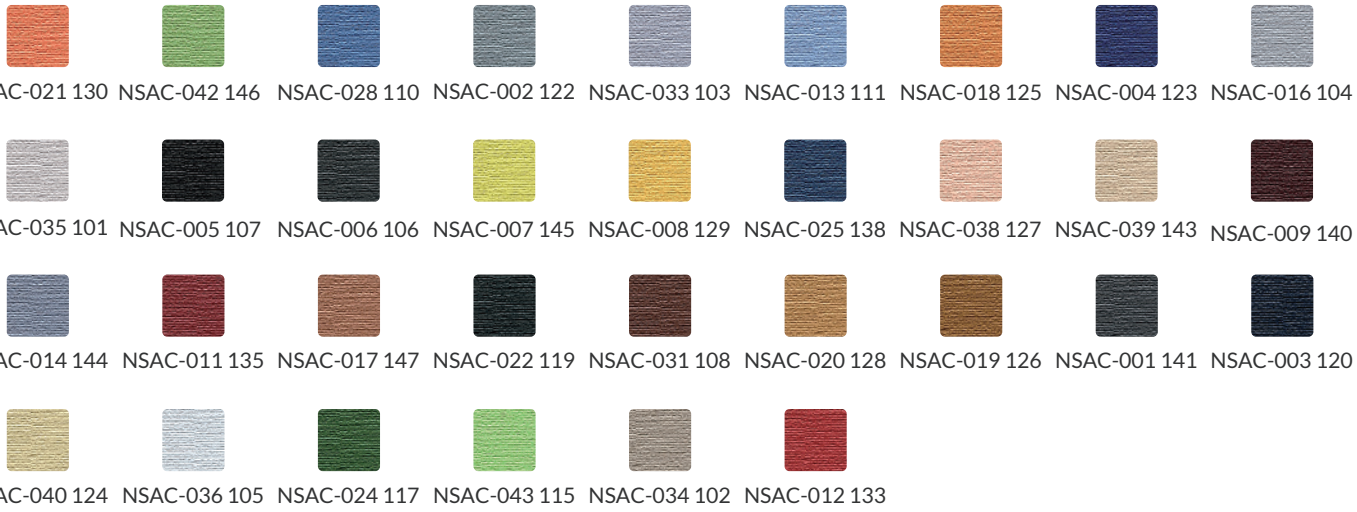


©2026 ABOVE ALL Lighting, Inc. All rights reserved.

Ref#: 4-20261111


SPECIFICATION

Dimension


Cable and wire cord length: 59" (1.5m)

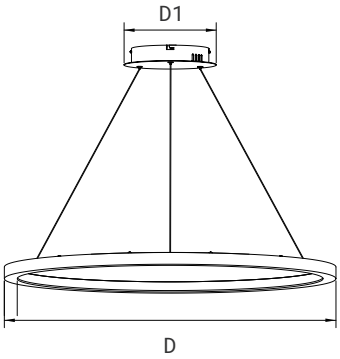

Central Canopy Suspended



Direct Suspended



Section

Central Canopy Suspended

Dimension		Driver Quantity	Section Quantity	Wattage
D	D1			
23.6"(600mm)	10.0"(250mm)	2	1	65W
35.4"(900mm)	10.0"(250mm)	2	1	80W
47.2"(1200mm)	13.8"(350mm)	3	1	120W
59.1"(1500mm)	13.8"(350mm)	3	1	135W
78.8"(2000mm)	17.7"(450mm)	4	3	150W
98.4"(2500mm)	17.7"(450mm)	5	4	200W
118.1"(3000mm)	18.0"(450mm)	7	5	300W
157.5"(4000mm)	23.6"(600mm)	8	6	400W
196.9"(5000mm)	23.6"(600mm)	14	6	480W

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.