

MAGIC LED LINEAR LIGHT

- Comes in lengths of 2', 4', and 8'
- 3000K, 3500K and 4000K selectable
- Wattage selectable
- Available with several lit joiner accessories for unlimited lighting pattern design
- Surface and pendant mount
- Microwave sensor and EBU are available


- Comes in lengths of 2', 4', and 8'




DESCRIPTION


This MAGIC led linear fixture is a 1.8" wide, linear architectural luminaire with a slim and a discrete profile. Available in standard lengths of 2', 4', and 8' that can be joined together in seamless runs of desired length. The MAGIC Linear is wattage and CCT selectable. A selection of pattern creating joiners are available for unlimited lighting pattern designs.

PERFORMANCE

	Length	2FT/4FT/8FT		
	Width	1.8"		
	Input Watts (Nominal):	10W/15W/20W selectable 20W/30W/40W selectable 40W/60W/80W selectable		
	Input Voltage:	120-277V (Int.Driver)		
	Efficacy@3500K	500lm/ft, 5w/ft 750lm/ft, 7.5w/ft 1000lm/ft, 10w/ft	500lm/ft, 5w/ft 750lm/ft, 7.5w/ft 1000lm/ft, 10w/ft	500lm/ft, 5w/ft 750lm/ft, 7.5w/ft 1000lm/ft, 10w/ft
	CRI	80		
	Working Temperature:	-4-104°F (-20-40°C)		
	Installation	Pendant / Surface Mount		
	Controls (optional)	Emergency Battery Back-up / Motion Sensor		

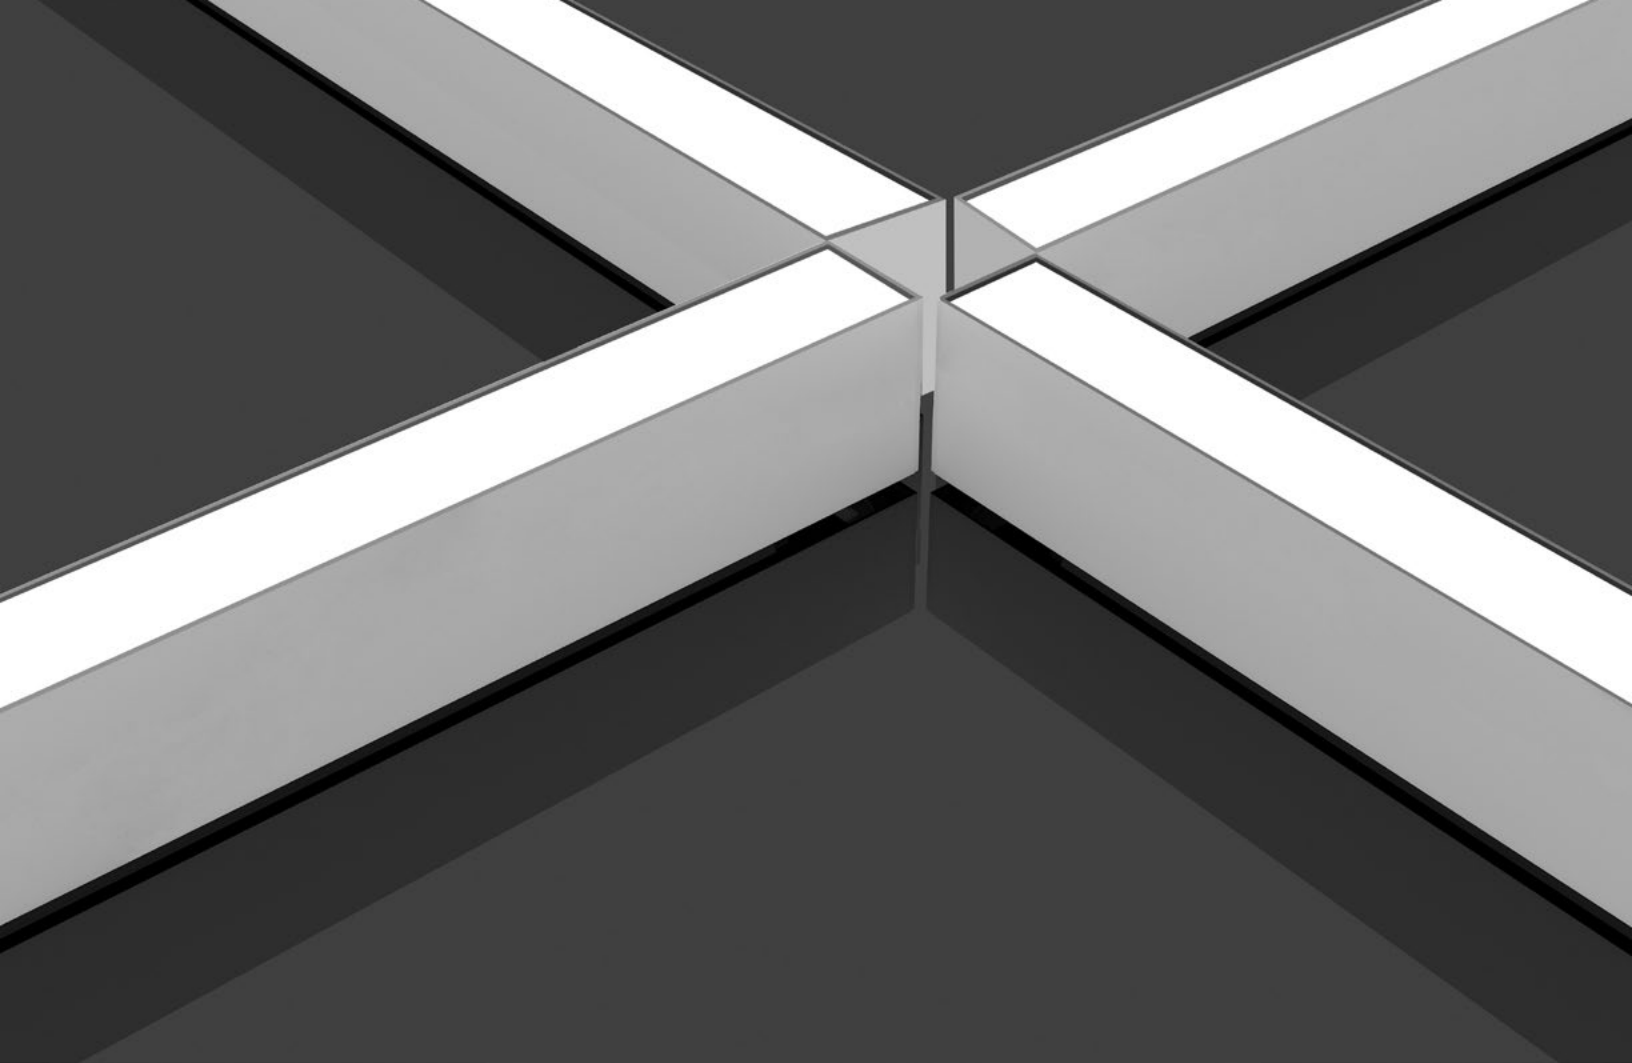


DIMENSIONS

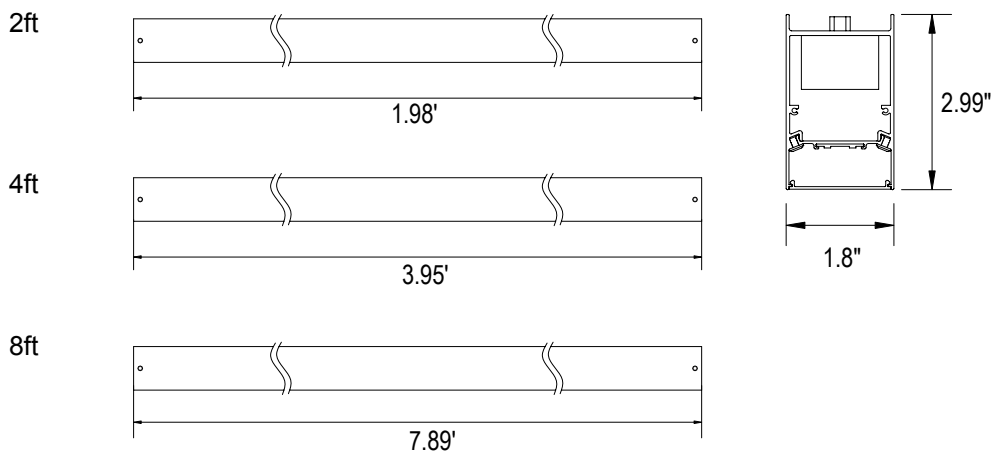


- Microwave sensor and EBU are available

3000K	3500K	4000K
CCT SELECTABLE		
WATTAGE SELECTABLE		

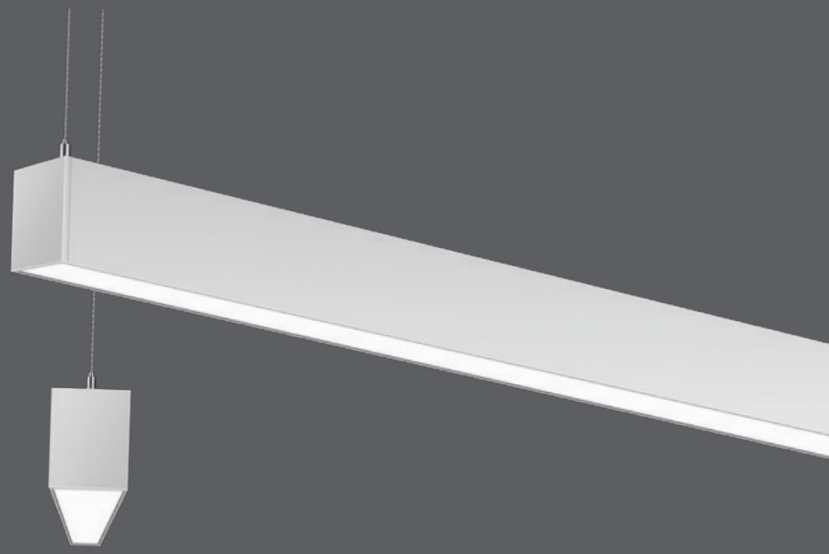


PHOTOMETRY

Distribution Diagram

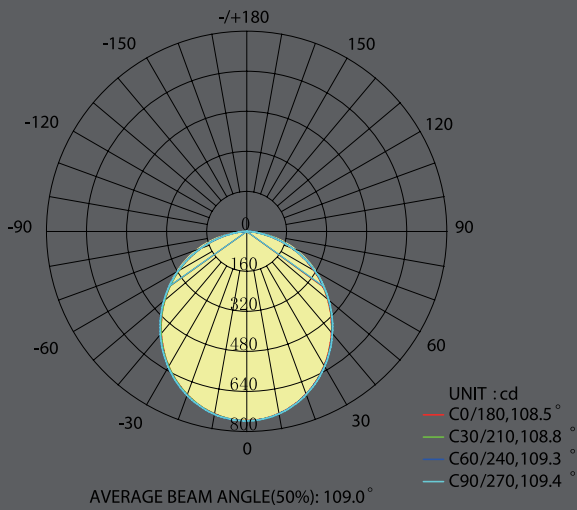

20W

Distribution Diagram

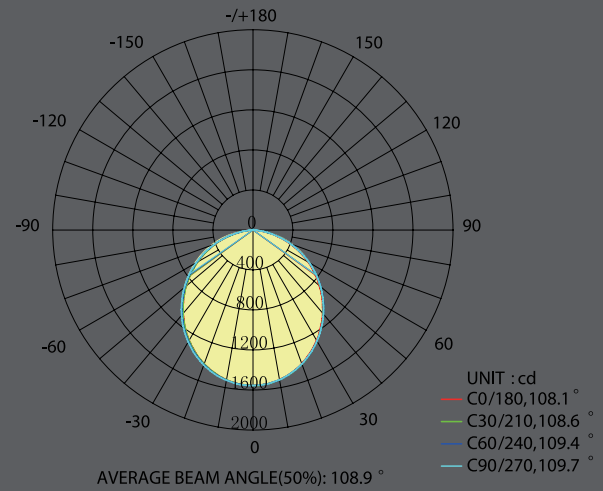



40W





ABOVE ALL Lighting, Inc.

 1135 Thomas Busch Highway,
Pennsauken, NJ 08110

 866-222-8866

 info@abovealllighting.com

 www.AboveAllLighting.com