

LED CENTER BASKET TROFFER WITH PHILIPS PROGRAMMABLE LED DRIVER




PRODUCT DESCRIPTION

The LED Center Basket Troffer is designed to replace the traditional 2x2 and 2x4 fluorescent troffer. It adopts PHILIPS programmable LED driver and module. It is suitable for office, super market, and hotel interior decoration. Modern design with high efficiency, high color rendering index and long life span.

SPECIFICATION

2x2
 Max. Weight: 8.66lbs

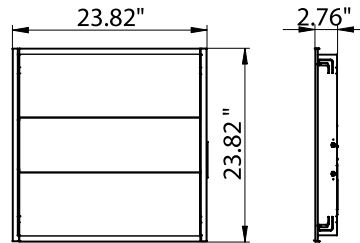

Ordering Information

Example: TR22D25LED40-S

Center Basket Troffe	Size	Dimmable	Watts	LED	CCT	Series
TR	22 - 2x2 FT	D - 1-10V Dimmable	25 - 25 Watts	LED	40 - 4000K	S - S Series ¹

Notice:

1. It adopts PHILIPS programmable LED driver and module.
2. Standard Finish is White.
3. Special Order as other finish color - Ask Customer Service for Details.

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -4-104°F (-20-40°C)

Watts	Lumen Output	Size	Measured Watts	CRI	CCT	LPW
25W	3125	2X2	25W	>80	4000K	125

Ambient		Multiplier
Celsius	Fahrenheit	
0	32	1.02


Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the LED Troffer in a 77°F ambient, (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Operating Hours	150,000
Lumen Maintenance Factor	0.70(L70)

Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

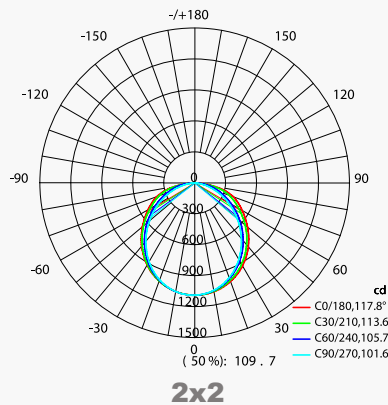

PRODUCT SPECIFICATIONS

ELECTRICAL SYSTEM

- Input Voltage: 120-277V
- 50/60Hz
- 1-10V Dimmable
- Minimum Ambient -4°F, maximum 104°F
- Power Factor: > 0.98 at 120V
- Total Harmonic Distortion: < 20% at full load

CERTIFICATIONS AND QUALIFICATIONS

- cETL listed
- Suitable for damp locations
- DLC premium in process
- RoHS compliant

Warranty

Five year limited warranty. Full warranty terms located at www.abovealllighting.com/warrantystatements

Note: Specifications subject to change without notice.